

SPEED CONTROL MOTORS(SU)





[Characteristics of Speed Control Motor]

1. Characteristics of Speed Control Motor

- By using it with the speed controller, a wide range of speed can be controlled (50Hz : 90~1400rpm, 60Hz : 90~1700rpm). The speed can be controlled easily with the speed controller.
- Depending on the type of speed controller, it can be combined with the motor for various purposes such as speed-control, braking, slow run, slow stop, etc.
- Built in T.G. (Tacho Generator) to control the feedback. Thus, even if the power frequency is changed but the rotating numbers does not change.
- When the speed control motor with an electronic brake is used with the speed controller, instantaneous braking and electronic braking operate simultaneously for strong braking power.
- The speed control motor with an electronic brake also has a non-excitation run type of electronic brake. Even if the power is off, braking is operated to maintain braking of a load.
- Speed control motors are consisted of the induction motor the reversible motor and the speed control motor with an electronic brake which are small AC motor. The applicable motor should be selected for appropriate uses.
- Output range of the induction motor is 6W~90W (unit types are 6W~180W). The reversible motor has an output range of 6W~40W and the electronic brake motor has an output range of 6W~40W. (However, SR types are 6W~90W.)

2. Selection Method

(1) Selection of motor and controller

- Is speed control needed only?
- Is instantaneous braking needed?
- Is maintenance of braking power needed?
- How much is the output of the applicable motor?
- Are the slow run, slow stop runtions needed?

According to the above conditions, the types of speed control motors and speed controllers are selected.

(2) Selection of gear ratio of gearhead

- When the number of rotations of the output shaft of the gear requires A rpm to B rpm, the gear ratio is calculated by using the higher number of rotations (B rpm). For the AC speed control motor, the number of rotations for the motor is calculated with 1300 rpm. (This is the reason for the output torque and the range of use are large at 1300 rpm.)

$$\text{deceleration ratio } i = \frac{1300[\text{rpm}]}{N^2[\text{rpm}]}$$

(3) Highest number of rotations and lowest number of rotations of the motor shaft

- When the highest number of rotations is NH and the lowest number of rotations is NL, they are as follows.
- Highest number of rotations of the required motor:
NH = B x i [rpm]
- Lowest number of rotations of the required motor:
NL = A x i [rpm]

(4) Required torque of the motor

$$T_M = \frac{T_L}{i \times \eta} = [\text{gf} \cdot \text{cm}]$$

The required torque of the motor is found as follows.

T_M : Required torque of the motor [g · cm]


T_L : Torque necessary to operate actual load [g · cm]

i : Reduction ratio

η : Efficiency of the gearhead

(5) Selection of the motor

- The motor is decided by the required torque T_M, rotational frequencies NL~NH and the torque-number of rotations curve (hereafter, N-T curve).
- In the case of the AC speed control motor (Fig. 1) of the curves, the moment curve (i curve) selects the motor below the limit curve. (Even in the area above the limit curve, if the surface temperature of the motor is less than 90°C, then there are no problems with use.)

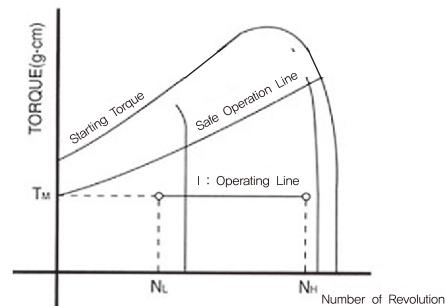

(Fig. 1) Torque–Number of Revolutions (N-T) Curve




(6) Selection of gearhead

- After the motor is selected in the above manner, the gearhead is decided with consideration of the torque size of the load. Confirm that the torque of the load is within the torque allowable by the gearhead.

3. Sample Calculation for Selection (Fig.2)

With single direction rotation of the belt conveyor, change the speed of the item being transported to 1m/minute, 2m/minute, and 4m/minute.

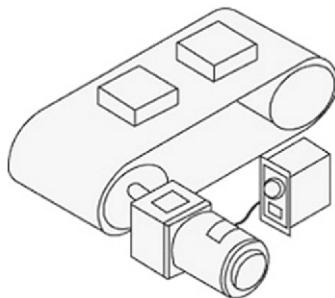

Drum diameter : 10cm

Operating torque : 30kg · cm

Power : Single phase 110V 60Hz

Instantaneous braking in emergencies, but no holding power.

(1) Motor and controller

- Rotation is in one direction and there is no holding power. Therefore, the induction motor is selected.

(2) Revolutions of output shaft of gearhead

- The number of rotations of the gearhead shaft when the belt conveyor speed is 1m/minute.

$$\text{Number of rotations} = \frac{\text{Speed of belt conveyor}}{\text{Outer diameter of drum}} = \frac{100}{10\pi} = 3.18[\text{rpm}]$$

- Number of rotations of the gearhead shaft when the belt conveyor speed is 2m/minute.

$$\text{Number of rotations} = \frac{\text{Speed of belt conveyor}}{\text{Outer diameter of drum}} = \frac{200}{10\pi} = 6.37[\text{rpm}]$$

- Number of rotations of the gearhead shaft when the belt conveyor speed is 4m/minute.

$$\text{Number of rotations} = \frac{\text{Speed of belt conveyor}}{\text{Outer diameter of drum}} = \frac{400}{10\pi} = 12.74[\text{rpm}]$$

(3) Gear ratio

- The gear ratio is calculated using the higher number of rotations of the gearhead.

$$\frac{\text{Number of rotations of the motor}}{\text{Number of rotations of the gearhead}} = \frac{1300}{12.74} = 102$$

Using 102, since there is no such reduction ratio as 1/102, 1/100 is selected.

(4) Number of rotations of motor shaft

- The number of rotations of the motor shaft is calculated by the number of rotations of the gearhead shaft x reduction ratio for each speed of the belt conveyor to get the following.

- $3.18 \times 100 = 318$ [rpm]
- $6.37 \times 100 = 637$ [rpm]
- $12.74 \times 100 = 1274$ [rpm]

(5) Required torque of motor

The transfer efficiency of a gearhead with gear ratio 100 is 66%, so the required torque of the motor is

$$\frac{\text{Operating torque}}{\text{Gear ratio} \times \text{Efficiency}} = \frac{30}{100 \times 0.66} = 0.45[\text{kg} \cdot \text{cm}]$$

(6) Selection of motor


- From the N-T curve of the induction motor, it can be seen that the K8IG25NC-S motor and the K8G100B gearhead can be combined to use. However, in such a case, make sure that the inertia load should fall within the specification of the selected motor.



4. The Principle of Speed Control

(1) The principle of speed control

- (Fig. 3) is the basic speed control structure of the close loop current control method. The following are explanations of close loop speed control.

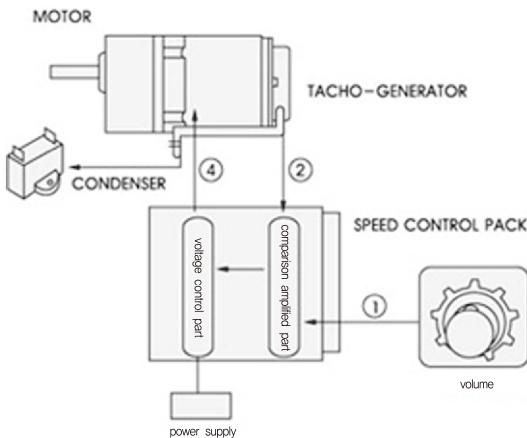


(Fig. 3) Basic structure of speed control for the close loop voltage control method

- If Tacho-Generator changes the voltage that is proportional to the rotations, make comparison between the number of rotations of the motor and the voltage preset by the volume.
- This difference in voltage is called "comparative voltage".
- Comparative voltage operates the motor through the voltage amplifier and the voltage controller.
- Comparative voltage is mostly controlled by zero-crossing. Number of rotations is decided by the value that the speed controller selects.
- Even when the load changes, the number of rotations does not change. When the Tacho-Generator changes, the number of rotations immediately changes with the value.
- Accordingly, close loop speed control detects the number of rotations of the motor and controls the operating voltage to maintain it constantly.


(2) Primary voltage control by close loop

- The relationship between the torque of the induction motor and the number of rotations is as follows (Fig. 4) when the applied voltage (primary voltage) of the motor is changed.

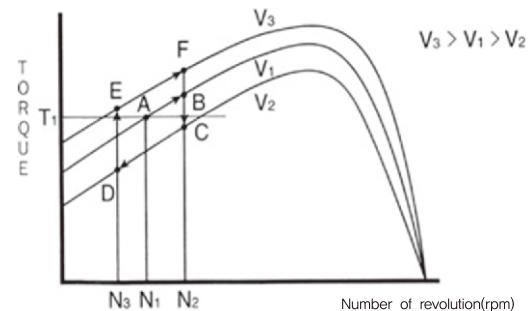

(Fig. 4)

- The current voltage is V_1 , the torque of the load is T_1 and the number of rotations is N_1 . That point is A. Speed is increased to B and when the voltage is changed from V_1 to V_2 , then it moves to C.
- At C, the torque of the load T_1 is larger than the torque of the motor, thus the number of rotations are lower than N_2 .
- When the number of rotations becomes N_3 and the voltage is raised to V_3 , then the generated torque becomes larger than the torque of the load to move to E, and then the speed increases again toward F.
- To stabilize the number of rotations, it has to make loop smaller like C → D → E → F by controlling the primary voltage.
- During the primary voltage control by close loop, to meet the changes according to the number of rotations of the motor, it should have the primary voltage controlled and maintain the number of rotations constant.

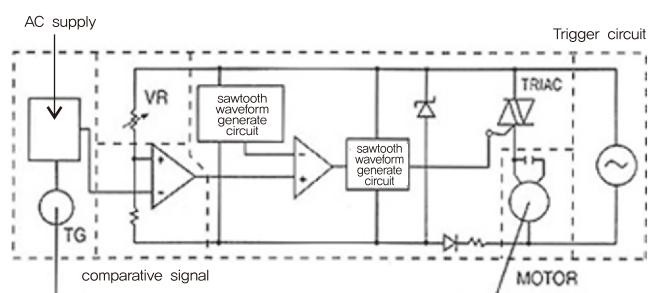


(Fig. 5)

(3) Operation of speed controller

- The speed controller is explained in (Fig. 5).
- Number of rotations of the motor comes from the Tacho-Generator through feedback voltage through the rectifying circuit.
- The difference between the selected voltage of the speed controller which was controlled in the VR and the feedback voltage is amplified in the comparative amplifier.



- A trigger signal is generated from the sawtooth waveform which comes from the sawtooth waveform generator, comparator from the comparative signal and triac from the trigger circuit.
- The angle of the triac is controlled with the trigger signal to control voltage in the motor.
- This makes the number of rotations of the motor constant, thereby controlling it. Refer to (Fig. 6).

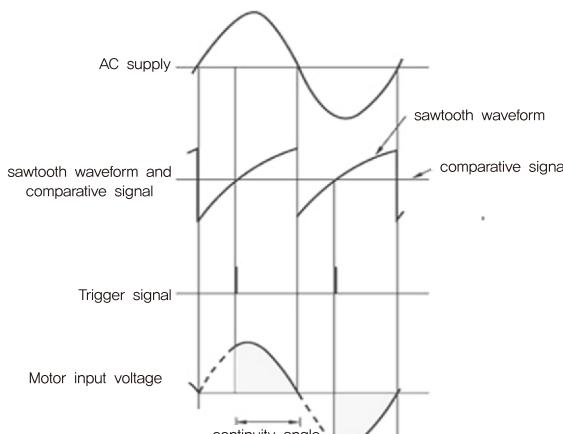


(Fig. 6)

5. Limit of Use

(1) Limit curve

- In the AC speed control motor N-T graph (Fig. 7), the area below the limit curve is called the continuous operation area.
- The limit curve does not go beyond the highest temperature allowed by the motor (continuous for induction motors and 30 minutes rating for reversible motors) and because continuous operation is possible, it is decided by the temperature of the motor.

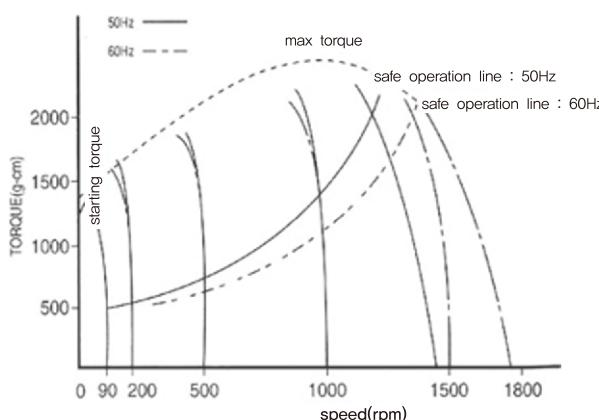

(Fig. 7) Torque-number of revolutions N-T curve

- Our speed control motor has a class E insulation and the permitted temperature of the winding section is 120°C. Therefore, if the temperature of the winding section is less than 120°C, continuous operation is possible, but it is difficult or the user to measure the temperature of the winding section, continuous operation is generally possible when the surface temperature of the motor housing is less than 90°C. The difference between the winding section of the motor and the housing surface is generally between 10°C~20°C.

(2) The meaning of for less than 90°C surface temperature of the motor housing

- The highest part of the motor's rising temperature is the winding section. Thus, the highest allowable temperature is decided by the insulation level of the winding section. (Our small AC motor has a class E insulation and the highest allowable temperature is 120°C.)
- The difference between the temperature of the surface of the motor and the winding section is about 10°C~20°C. (A motor with a cooling fan has about 30°C because the cooling fan cools the surface of the motor.)
- When the temperature of the winding section is 120°C, the surface temperature is about 100°C. Therefore, 90°C is the sufficient value.

(3) Range of use according to instantaneous braking

- Instantaneous braking uses direct current which is half-wave rectified current in the motor thus causing the temperature of the motor to rise rapidly.
- In the N-T graph, the limit curve is in the case of continuous operation, therefore, if instantaneous braking is applied often, the range of the limit decreases.
- For instantaneous braking, temperature rises by frequent braking, thus care should be taken so that the surface temperature of the motor does not exceed 90°C.



SPEED CONTROL MOTOR - SU SERIES

6W

□ 60mm

INDUCTION MOTOR

K6IS6N□-SU

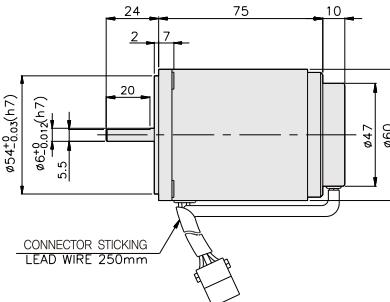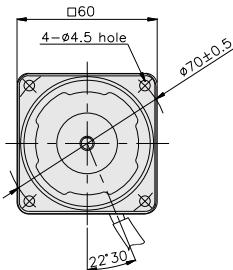

SPECIFICATIONS

6W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N*m/Kgf*cm)	Current (A)	Condenser (μF)	
					1200rpm	90rpm				
					(N*m/Kgf*cm)	(N*m/Kgf*cm)				
K6I□6NJ-SU	single-phase	100	50	90 ~ 1400	0.05/0.5	0.03/0.3	0.029/0.29	0.28	3	
			60	90 ~ 1700				0.26		
K6I□6NU-SU		110	60	90 ~ 1700	0.05/0.5	0.03/0.3	0.03/0.3	0.24	2	
		115								
K6I□6NL-SU		200	50	90 ~ 1400	0.05/0.5	0.029/0.29	0.03/0.3	0.19	0.8	
		200	60	90 ~ 1700						
K6I□6NC-SU		220	50	90 ~ 1400	0.05/0.5	0.029/0.29	0.029/0.29	0.2	0.6	
		220	60	90 ~ 1700			0.027/0.27			
		230	50	90 ~ 1400			0.029/0.29			
		230	60	90 ~ 1700						
K6I□6ND-SU		240	50	90 ~ 1400	0.05/0.5	0.029/0.29	0.03/0.3	0.21	0.5	

* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : KgF·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
Motor/Gearhead	Speed(rpm)																									
K6I□6N□-SU K6G□B(C)	1200	0.12 1.2	0.15 1.5	0.20 2.0	0.24 2.4	0.30 3.0	0.36 3.6	0.41 4.1	0.51 5.1	0.61 6.1	0.73 7.3	0.73 7.3	0.91 9.1	1.09 10.9	1.31 13.1	1.46 14.6	1.64 16.4	1.97 19.7	2.46 24.6	2.95 29.5	3 30	3 30	3 30	3 30	3 30	
	90	0.07 0.7	0.08 0.8	0.12 1.2	0.14 1.4	0.18 1.8	0.21 2.1	0.23 2.3	0.26 2.6	0.32 3.2	0.42 4.2	0.42 4.2	0.53 5.3	0.63 6.3	0.76 7.6	0.85 8.5	0.95 9.5	1.14 11.4	1.43 14.3	1.71 17.1	1.90 19.0	2.28 22.8	2.85 28.5	3 30	3 30	

● Single-phase 200V/240V

unit = above : N·m / below : KgF·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
Motor/Gearhead	Speed(rpm)																									
K6I□6N□-SU K6G□B(C)	1200	0.12 1.2	0.15 1.5	0.20 2.0	0.24 2.4	0.30 3.0	0.36 3.6	0.41 4.1	0.51 5.1	0.61 6.1	0.73 7.3	0.73 7.3	0.91 9.1	1.09 10.9	1.31 13.1	1.46 14.6	1.64 16.4	1.97 19.7	2.46 24.6	2.95 29.5	3 30	3 30	3 30	3 30	3 30	
	90	0.07 0.7	0.08 0.8	0.12 1.2	0.14 1.4	0.18 1.8	0.21 2.1	0.23 2.3	0.29 2.9	0.35 3.5	0.42 4.2	0.42 4.2	0.53 5.3	0.63 6.3	0.76 7.6	0.85 8.5	0.95 9.5	1.14 11.4	1.43 14.3	1.71 17.1	1.90 19.0	2.28 22.8	2.85 28.5	3 30	3 30	

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

CONNECTION DIAGRAMS

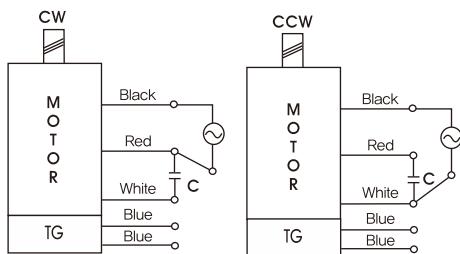

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K6G□B(C)




K6IG6N□-SU + K6G□B(C)




DECIMAL GEARHEAD

K6G10BX

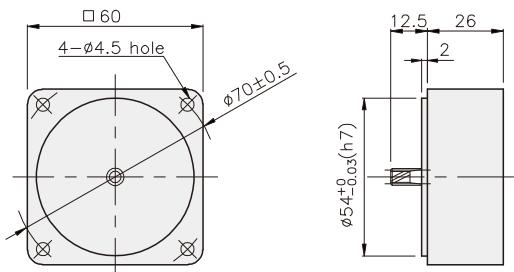

GEARHEAD

K6G□B(C)

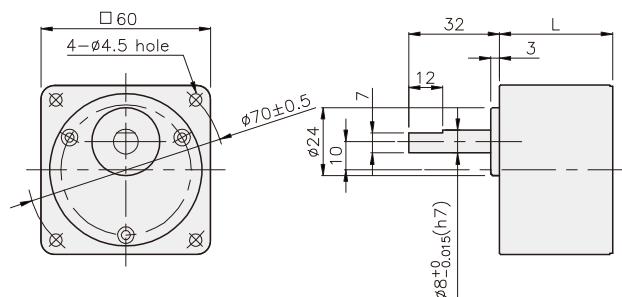


DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	32	K6G3~18B(C)	M4 P0.7 X 50
02	40	K6G20~250B(C)	M4 P0.7 X 60
03	32	K6G10BX	M4 P0.7 X 85

WEIGHT

PART	WEIGHT(kg)
MOTOR	0,79
DECIMAL GEAR HEAD	0,22
GEAR HEAD	0,26
	0,33
	0,36

K6IG6N□-SU + K6G□B(C)

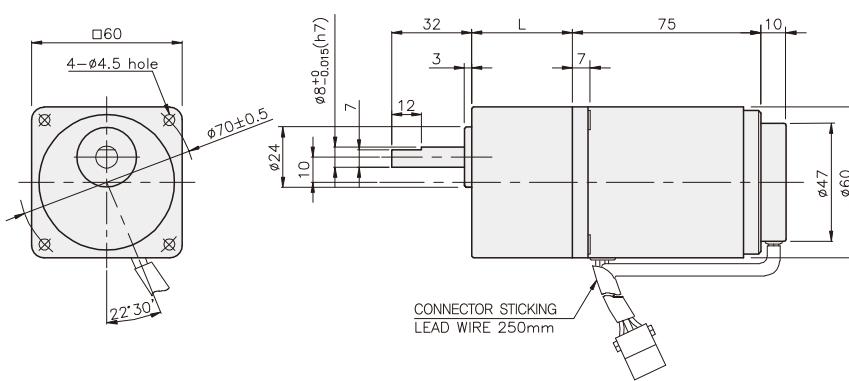



SPEED CONTROL MOTOR - SU SERIES

15W

□70mm

INDUCTION MOTOR

K7IS15N□-SU

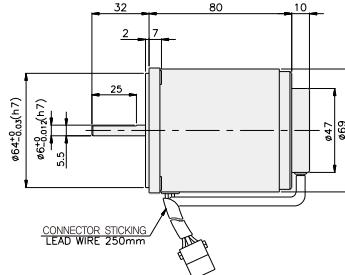

SPECIFICATIONS

15W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N·m/Kgf·Cm)	Current (A)	Condenser (μF)		
					1200rpm	90rpm					
					(N·m/Kgf·Cm)	(N·m/Kgf·Cm)					
K7I□15NJ-SU	single-phase	100	50	90 ~ 1400	0.125/1.25	0.045/0.45	0.07/0.7	0.55	5		
			60	90 ~ 1700				0.51			
K7I□15NU-SU		110	60	90 ~ 1700	0.125/1.25	0.045/0.45	0.07/0.7	0.47	4.5		
								0.075/0.75			
K7I□15NL-SU		200	50	90 ~ 1400	0.125/1.25	0.04/0.4	0.08/0.8	0.3	1.5		
			60	90 ~ 1700				0.085/0.85			
K7I□15NC-SU		220	50	90 ~ 1400	0.125/1.25	0.04/0.4	0.06/0.6	0.29	1		
			60	90 ~ 1700				0.28			
		230	50	90 ~ 1400	0.125/1.25		0.065/0.65	0.3			
			60	90 ~ 1700				0.29			
K7I□15ND-SU		240	50	90 ~ 1400	0.125/1.25	0.04/0.4	0.07/0.7	0.32	1		

* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	
Motor/Gearhead	Speed(rpm)																									
K7I□15N□-SU K7G□B(C)	1200	0.30 3.0	0.36 3.6	0.51 5.1	0.61 6.1	0.76 7.6	0.91 9.1	1.01 10.1	1.27 12.7	1.52 15.2	1.82 18.2	1.82 18.2	2.28 22.8	2.73 27.3	3.28 32.8	3.65 36.5	4.10 41.0	4.92 49.2	5 50	5 50	5 50	5 50	5 50	5 50	5 50	
		0.11 1.1	0.13 1.3	0.18 1.8	0.22 2.2	0.27 2.7	0.33 3.3	0.36 3.6	0.46 4.6	0.55 5.5	0.66 6.6	0.66 6.6	0.82 8.2	0.98 9.8	1.18 11.8	1.31 13.1	1.48 14.8	1.77 17.7	2.21 22.1	2.66 26.6	2.95 29.5	3.54 35.4	4.43 44.3	5 50	5 50	

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	
Motor/Gearhead	Speed(rpm)																									
K7I□15N□-SU K7G□B(C)	1200	0.30 3.0	0.36 3.6	0.51 5.1	0.61 6.1	0.76 7.6	0.91 9.1	1.01 10.1	1.27 12.7	1.52 15.2	1.82 18.2	1.82 18.2	2.28 22.8	2.73 27.3	3.28 32.8	3.65 36.5	4.10 41.0	4.92 49.2	5.15 50	5 50	5 50	5 50	5 50	5 50	5 50	
		0.26 2.6	0.31 3.1	0.43 4.3	0.51 5.1	0.64 6.4	0.77 7.7	0.85 8.5	1.06 10.6	1.28 12.8	1.53 15.3	1.53 15.3	1.91 19.1	2.30 23.0	2.76 27.6	3.06 30.6	3.44 34.4	4.13 41.3	5 50	5 50	5 50	5 50	5 50	5 50	5 50	
		0.10 1.0	0.12 1.2	0.16 1.6	0.19 1.9	0.24 2.4	0.29 2.9	0.32 3.2	0.41 4.1	0.49 4.9	0.58 5.8	0.58 5.8	0.73 7.3	0.87 8.7	1.05 10.5	1.17 11.7	1.31 13.1	1.57 15.7	1.97 19.7	2.36 23.6	2.62 26.2	3.15 31.5	3.94 39.4	4.72 47.2	5 50	

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 5N·m/50kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

CONNECTION DIAGRAMS

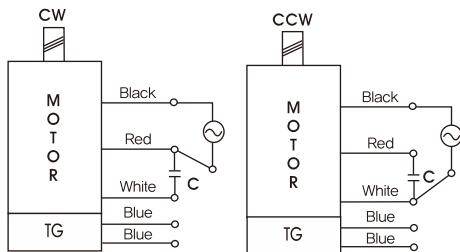

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K7G□B(C)




K7IG15N□-SU + K7G□B(C)




DECIMAL GEARHEAD

K7G10BX

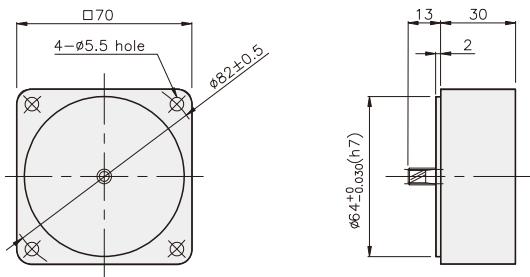

GEARHEAD

K7G□B(C)

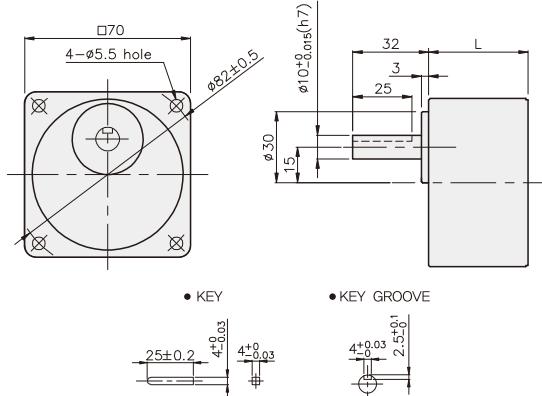


DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	32	K7G3~18B(C)	M5 P0.8 X 50
02	40	K7G20~200B(C)	M5 P0.8 X 65
03	32	K7G10BX	M5 P0.8 X 90

WEIGHT

PART	WEIGHT(kg)
MOTOR	1.16
DECIMAL GEAR HEAD	0.32
GEAR HEAD	0.36
	0.46
	0.51

K7IG15N□-SU + K7G□B(C)

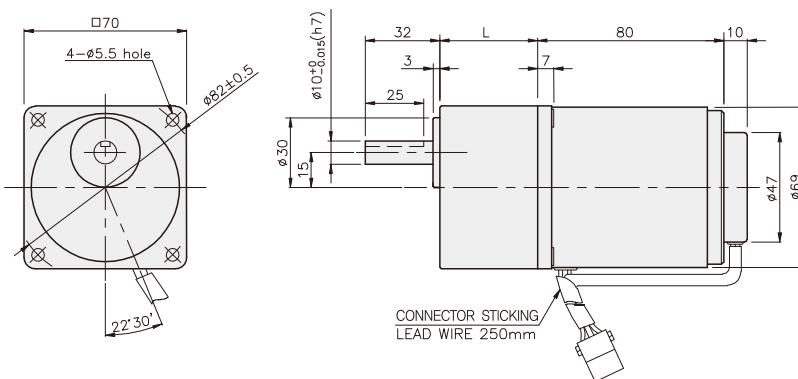



SPEED CONTROL MOTOR - SU SERIES

25W

□ 80mm

INDUCTION MOTOR

K8IS25N□-SU

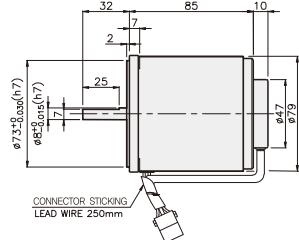

SPECIFICATIONS

25W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N*m/Kgf*cm)	Current (A)	Condenser (μF)	
					1200rpm	90rpm				
					(N*m/Kgf*cm)	(N*m/Kgf*cm)				
K8I□25NJ-SU	single-phase	100	50	90 ~ 1400	0.2/2	0.05/0.5	0.08 0.8	0.8	7	
			60	90 ~ 1700				0.75		
K8I□25NU-SU		110	60	90 ~ 1700	0.2/2	0.05/0.5	0.08 0.8	0.67	5	
								0.68		
K8I□25NL-SU		200	50	90 ~ 1400	0.19/1.9	0.047/0.47	0.085 0.085	0.36	1.8	
			60	90 ~ 1700				0.38		
K8I□25NC-SU		220	50	90 ~ 1400	0.19/1.9	0.047/0.47	0.08 0.8	0.38	1.5	
			60	90 ~ 1700				0.35		
K8I□25ND-SU		230	50	90 ~ 1400	0.19/1.9	0.047/0.47	0.087 0.87	0.4	1.2	
			60	90 ~ 1700				0.36		
K8I□25ND-SU		240	50	90 ~ 1400	0.19/1.9	0.047/0.47	0.08 0.8	0.42	1.2	

* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kg·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
Motor/Gearhead	Speed(rpm)																									
K8I□25N□-SU K8G□B(C)	1200	0.49 4.9	0.58 5.5	0.81 8.1	0.97 9.7	1.22 12.2	1.46 14.6	1.62 16.2	2.03 20.3	2.43 24.3	2.92 29.2	2.92 29.2	3.65 36.5	4.37 43.7	5.25 52.5	5.83 58.3	6.56 65.6	7.87 78.7	8 80							
	90	0.12 1.2	0.15 1.5	0.20 2.0	0.24 2.4	0.30 3.0	0.36 3.6	0.41 4.1	0.51 5.1	0.61 6.1	0.73 7.3	0.73 7.3	0.91 9.1	1.09 10.9	1.31 13.1	1.46 14.6	1.64 16.4	1.97 19.7	2.46 24.6	2.95 29.5	3.28 32.8	3.94 39.4	4.92 49.2	5.90 59.0	6.56 65.6	8 80

● Single-phase 200V/240V

unit = above : N·m / below : Kg·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
Motor/Gearhead	Speed(rpm)																									
K8I□25N□-SU K8G□B(C)	1200	0.46 4.9	0.55 5.5	0.77 7.7	0.92 9.2	1.15 11.5	1.39 13.9	1.54 15.4	1.92 19.2	2.31 23.1	2.77 27.7	2.77 27.7	3.46 34.6	4.16 41.6	4.99 49.9	5.54 55.4	6.23 62.3	7.48 74.8	9.35 93.5	11.22 112.2	8 80	8 80	8 80	8 80	8 80	8 80
	90	0.32 3.2	0.38 3.8	0.53 5.3	0.63 6.3	0.79 7.9	0.95 9.5	1.05 10.5	1.32 13.2	1.58 15.8	1.90 19.0	1.90 19.0	2.37 23.7	2.84 28.4	3.41 34.1	3.79 37.9	4.26 42.6	5.12 51.2	6.40 64.0	7.68 76.8	8 80	8 80	8 80	8 80	8 80	8 80

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* █ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 8N·m/80kgf·cm. But, if you install 1/25~1/40 gearhead, the permissible torque is 6N·m/60kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

CONNECTION DIAGRAMS

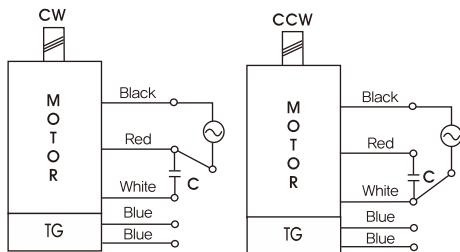

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K8G□B(C)




K8IG25N□-SU + K8G□B(C)




DECIMAL GEARHEAD

K8G10BX

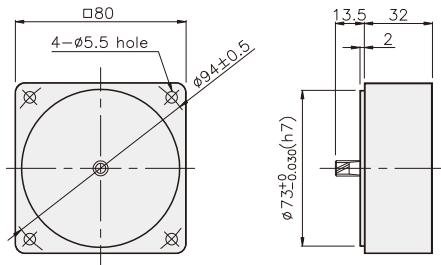

GEARHEAD

K8G□B(C)

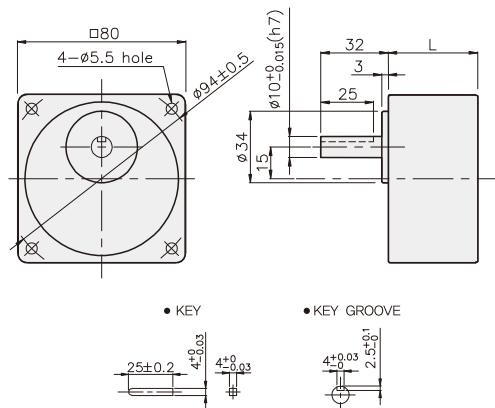


DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	32	K8G3~18B(C)	M5 P0.8 X 50
02	42.5	K8G20~250B(C)	M5 P0.8 X 65
03	32	K8G10BX	M5 P0.8 X 95

WEIGHT

PART	WEIGHT(kg)
MOTOR	1.60
DECIMAL GEAR HEAD	0.46
GEAR HEAD	
K8G3~18B(C)	0.51
K8G20~40B(C)	0.64
K8G50~250B(C)	0.70

K8IG25N□-SU + K8G□B(C)

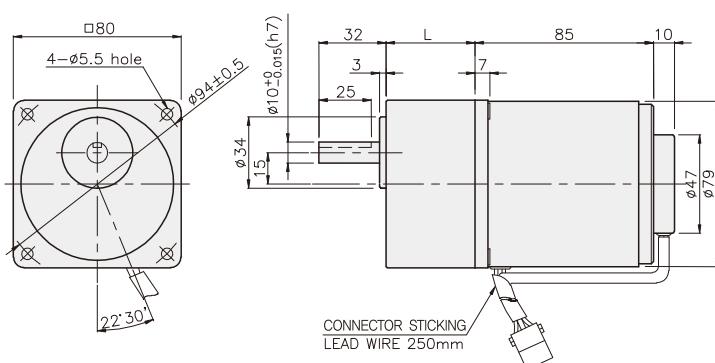



SPEED CONTROL MOTOR - SU SERIES

40W

□ 90mm

INDUCTION MOTOR

K9IS40N□-SU

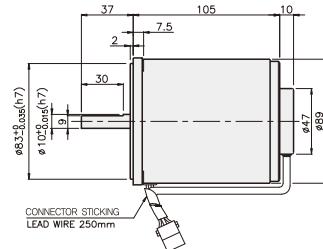

SPECIFICATIONS

40W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (Nm/Kgf.Cm)	Current (A)	Condenser (μF)	
					1200rpm (Nm/Kgf.Cm)	90rpm (Nm/Kgf.Cm)				
K9I□40NJ-SU	single-phase	100	50	90 ~ 1400	0.26/2.6	0.07/0.7	0.14/1.4	1.3	12	
			60	90 ~ 1700						
K9I□40NU-SU		110	60	90 ~ 1700	0.26/2.6	0.07/0.7	0.13/1.3	1.1	8	
K9I□40NL-SU		200	50	90 ~ 1400	0.3/3	0.063/0.63	0.14/1.4	0.6	3	
			60	90 ~ 1700						
K9I□40NC-SU		220	50	90 ~ 1400	0.063/0.63	0.14/1.4	0.58	2.5		
			60	90 ~ 1700						
		230	50	90 ~ 1400			0.13/1.3			
			60	90 ~ 1700			0.14/1.4	0.6		
K9I□40ND-SU		240	50	90 ~ 1400	0.3/3	0.063/0.63	0.13/1.3	0.6	2	

* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□40N□-SU K9G□B(C)	1200	0.63 6.3	0.76 7.6	1.05 10.5	1.26 12.6	1.58 15.8	1.90 19.0	2.11 21.1	2.63 26.3	3.16 31.6	3.79 37.9	3.79 37.9	4.74 47.7	5.69 56.9	6.82 68.2	7.58 75.8	8.53 85.3	10 100							
	90	0.17 1.7	0.20 2.0	0.28 2.8	0.34 3.4	0.43 4.3	0.51 5.1	0.57 5.7	0.71 7.1	0.85 8.5	1.02 10.2	1.02 10.2	1.28 12.8	1.53 15.3	1.84 18.4	2.04 20.4	2.30 23.0	2.76 27.6	3.44 34.4	4.13 41.3	4.59 45.9	5.51 55.1	6.89 68.9	8.27 82.7	9.19 91.9

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□40N□-SU K9G□B(C)	1200	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	3.04 30.4	3.65 36.5	4.37 43.7	4.37 43.7	5.47 54.7	6.56 65.6	7.87 78.7	8.75 87.5	10 100								
		0.56 5.6	0.67 6.7	0.93 9.3	1.12 11.2	1.40 14.0	1.68 16.8	1.86 18.6	2.33 23.3	2.79 27.9	3.35 33.5	3.35 33.5	4.19 41.9	5.03 50.3	6.04 60.4	6.71 67.1	8.38 83.8	10 100							
		0.15 1.5	0.18 1.8	0.26 2.6	0.31 3.1	0.38 3.8	0.46 4.6	0.51 5.1	0.64 6.4	0.77 7.7	0.92 9.2	0.92 9.2	1.15 11.5	1.38 13.8	1.65 16.5	1.84 18.4	2.07 20.7	2.48 24.8	3.10 31.0	3.72 37.2	4.13 41.3	4.96 49.6	6.20 62.0	7.44 74.4	8.27 82.7

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 10N·m/100kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

CONNECTION DIAGRAMS

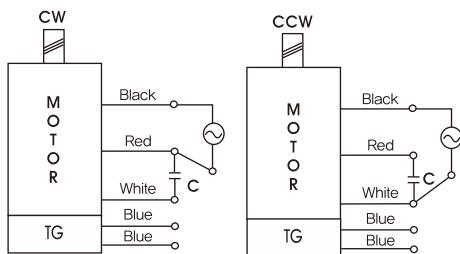

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K9G□B(C)




K9IG40N□-SU + K9G□B(C)




DECIMAL GEARHEAD

K9G10BX

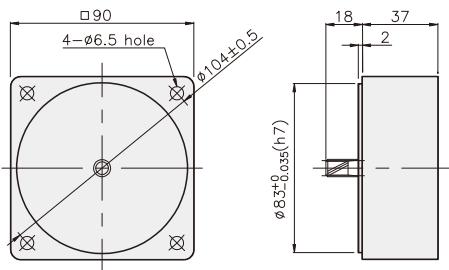

GEARHEAD

K9G□B(C)

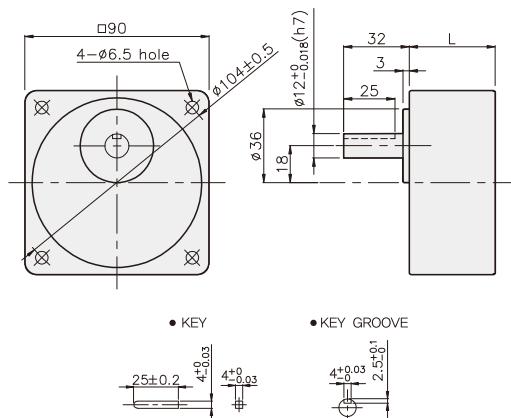


DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	42	K9G3~18B(C)	M6 P1.0 X 65
02	60	K9G20~200B(C)	M6 P1.0 X 80
03	37	K9G10BX	M6 P1.0 X 120

WEIGHT

PART	WEIGHT(kg)
MOTOR	2.48
DECIMAL GEAR HEAD	0.60
GEAR HEAD	K9G3~18B(C)
	K9G20~40B(C)
	K9G50~200B(C)

K9IG40N□-SU + K9G□B(C)

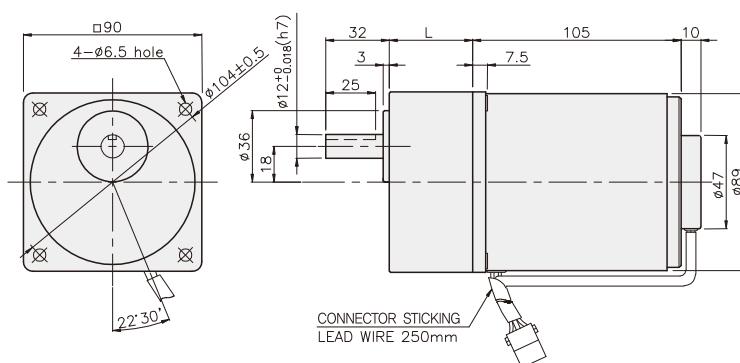


SPEED CONTROL MOTOR - SU SERIES

60W

□ 90mm

INDUCTION MOTOR

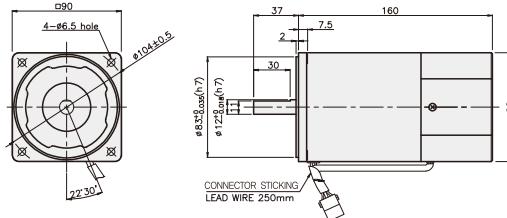

SPECIFICATIONS

60W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N·m/Kgf·cm)	Current (A)	Condenser (μF)
					1200rpm	90rpm			
					(N·m/Kgf·cm)	(N·m/Kgf·cm)			
K9I□60FJ-SU		100	50	90 ~ 1400	0.45/4.5	0.15/1.5	0.24/2.4	2.3	20
			60	90 ~ 1700			0.21/2.1		
K9I□60FU-SU		110	60	90 ~ 1700	0.45/4.5	0.15/1.5	0.285/2.85	2	16
							0.285/2.85	2.1	
K9I□60FL-SU		200	50	90 ~ 1400	0.49/4.9	0.14/1.4	0.24/2.4	1.2	5
			60	90 ~ 1700			0.16/1.6	0.21/2.1	
K9I□60FC-SU		220	50	90 ~ 1400	0.49/4.9	0.14/1.4	0.24/2.4	0.91	4
			60	90 ~ 1700			0.16/1.6	0.21/2.1	
K9I□60FD-SU		230	50	90 ~ 1400	0.49/4.9	0.14/1.4	0.24/2.4	1	4
			60	90 ~ 1700			0.16/1.6	0.24/2.4	
K9I□60FD-SU		240	50	90 ~ 1400	0.49/4.9	0.14/1.4	0.28/2.8	1.1	4

※ □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□60F□-SU K9P□B, BF	1200	1.09 10.9	1.31 13.1	1.82 18.2	2.19 21.9	2.73 27.3	3.28 32.8	3.65 36.5	4.10 41.0	4.92 49.2	5.90 59.0	6.56 65.6	7.38 73.8	8.86 88.6	10.63 106.3	11.81 118.1	14.76 147.6	17.71 177.1	20 200	20 200	20 200	20 200	20 200	20 200	20 200
	90	0.36 3.6	0.44 4.4	0.61 6.1	0.73 7.3	0.91 9.1	1.09 10.9	1.22 12.2	1.37 13.7	1.64 16.4	1.97 19.7	2.19 21.9	2.46 24.6	2.95 29.5	3.54 35.4	3.94 39.4	4.92 49.2	5.90 59.0	6.64 66.4	7.97 79.7	8.86 88.6	10.63 106.3	13.29 132.9	15.94 159.4	17.71 177.1

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□60F□-SU K9P□B, BF	1200	1.19 11.9	1.43 14.3	1.98 19.8	2.38 23.8	2.98 29.8	3.57 35.7	3.97 39.7	4.47 44.7	5.36 53.6	6.43 64.3	7.14 71.4	8.04 80.4	9.64 96.4	11.57 115.7	12.86 128.6	16.07 160.7	19.29 192.9	20 200	20 200	20 200	20 200	20 200	20 200	20 200
	90	0.34 3.4	0.41 4.1	0.57 5.7	0.68 6.8	0.85 8.5	1.02 10.2	1.13 11.3	1.28 12.8	1.53 15.3	1.84 18.4	2.04 20.4	2.30 23.0	2.76 27.6	3.31 33.1	3.67 36.7	4.59 45.9	5.51 55.1	6.20 62.0	7.44 74.4	8.27 82.7	9.92 99.2	12.40 124.0	14.88 148.8	16.53 165.3
	200V/220V/230V 240V/50Hz	0.39 3.9	0.47 4.7	0.65 6.5	0.78 7.8	0.97 9.7	1.17 11.7	1.30 13.0	1.46 14.6	1.75 17.5	2.10 21.0	2.33 23.3	2.62 26.2	3.15 31.5	3.78 37.8	4.20 42.0	5.25 52.5	6.30 63.0	7.09 70.9	8.50 85.0	9.45 94.5	11.34 113.4	14.17 141.7	17.01 170.1	18.90 189.0

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 20N·m/200kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

CONNECTION DIAGRAMS

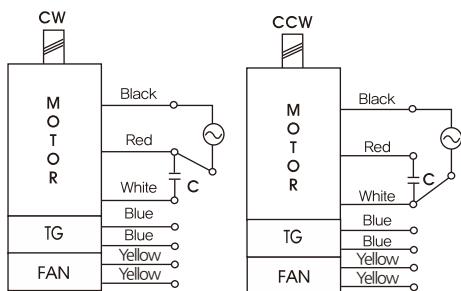

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K9P□B




K9P□BF





DECIMAL GEARHEAD

K9P10BX

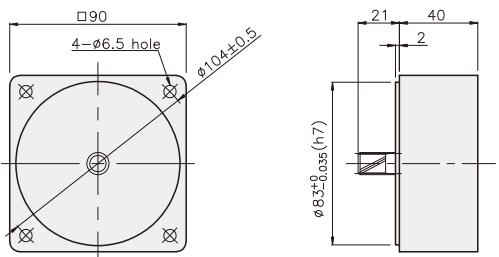


KEY SPEC

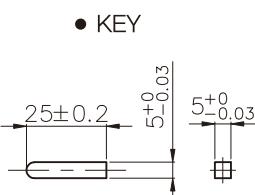


GEARHEAD

B

K9P□B

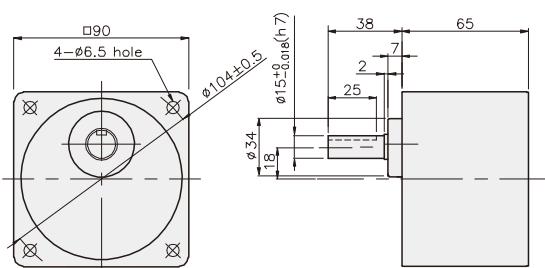

K9P□BF

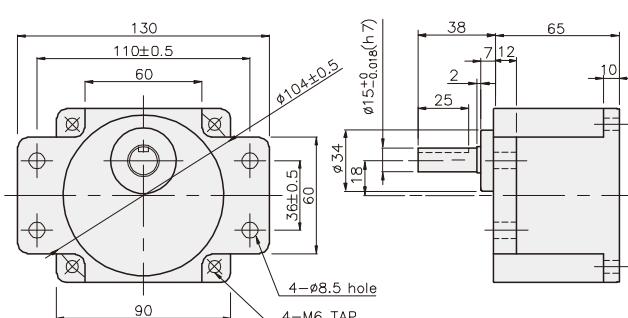

GEARHEADS

DIMENSIONS


K9IP60F□-SU + K9P□B



K9IP60F□-SU + K9P□BF



K9IP60F□-SU + K9P□B

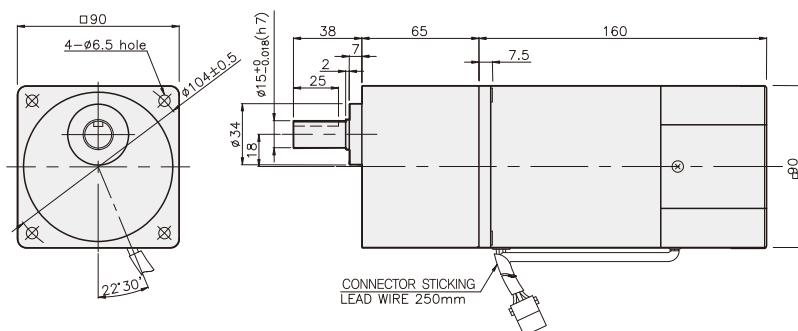


DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	65	K9P3~200B	M6 P1,0 X 95
02	40	K9P10BX	M6 P1,0 X 140

WEIGHT

PART	WEIGHT(kg)
MOTOR	3,06
DECIMAL GEAR HEAD	0,62
K9P3~10B	1,22
K9P12.5~20B	1,32
K9P25~60B	1,42
K9P75~200B	1,45

K9IP60F□-SU + K9P□BF

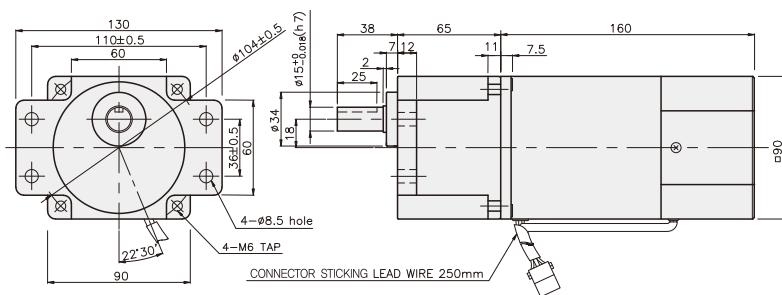

DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	65	K9P3~200BF	M6 P1,0 X 25
02	40	K9P10BX	M6 P1,0 X 65

WEIGHT

PART	WEIGHT(kg)
MOTOR	3,58
DECIMAL GEAR HEAD	0,62
K9P3~10BF	1,22
K9P12.5~20BF	1,30
K9P25~60BF	1,42
K9P75~200BF	1,44


SPEED CONTROL MOTOR - SU SERIES

90W

□ 90mm

INDUCTION MOTOR

K9IS90F□-SU

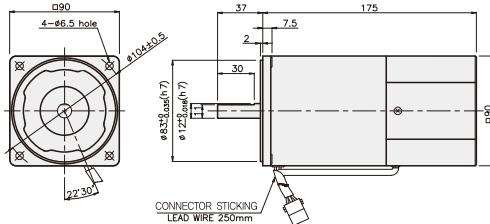

SPECIFICATIONS

90W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N·m/Kgf·cm)	Current (A)	Condenser (μF)			
					1200rpm	90rpm						
					(N·m/Kgf·cm)	(N·m/Kgf·cm)						
K9I□90FJ-SU		100	50	90 ~ 1400	0.7/7	0.23/2.3	0.36/3.6	3.2	30			
			60	90 ~ 1700								
K9I□90FU-SU		110	60	90 ~ 1700	0.7/7	0.23/2.3	0.35/3.5	2.6	20			
K9I□90FL-SU		200	50	90 ~ 1400	0.73/7.3	0.23/2.3	0.36/3.6	1.3	7			
			60	90 ~ 1700								
K9I□90FC-SU		220	50	90 ~ 1400	0.73/7.3	0.23/2.3	0.36/3.6	1.1	6			
			60	90 ~ 1700				1.2				
K9I□90FD-SU		230	50	90 ~ 1400	0.73/7.3	0.23/2.3	0.4/4					
			60	90 ~ 1700								
		240	50	90 ~ 1400	0.73/7.3	0.23/2.3	0.36/3.6	1.2	5			

* □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□90F□-SU K9P□B, BF	1200	1.70 17.0	2.04 20.4	2.84 28.4	3.40 34.0	4.25 42.5	5.10 51.0	5.67 56.7	6.38 63.8	7.65 76.5	9.19 91.9	10.21 102.1	11.48 114.8	13.78 137.8	16.53 165.3	18.37 183.7	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200
	90	0.56 5.6	0.67 6.7	0.93 9.3	1.12 11.2	1.40 14.0	1.68 16.8	1.86 18.6	2.10 21.0	2.52 25.2	3.02 30.2	3.35 33.5	3.77 37.7	4.53 45.3	5.43 54.3	6.04 60.4	7.55 75.5	9.05 90.5	10.19 101.9	12.22 122.2	13.58 135.8	16.30 163.0	20 200	20 200	20 200

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□90F□-SU K9P□B, BF	1200	1.77 17.7	2.13 21.3	2.96 29.6	3.55 35.5	4.43 44.3	5.32 53.2	5.91 59.1	6.65 66.5	7.98 79.8	9.58 95.8	10.64 106.4	11.97 119.7	14.37 143.7	17.24 172.4	19.16 191.6	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200
	90	0.56 5.6	0.67 6.7	0.93 9.3	1.12 11.2	1.40 14.0	1.68 16.8	1.86 18.6	2.10 21.0	2.52 25.2	3.02 30.2	3.35 33.5	3.77 37.7	4.53 45.3	5.43 54.3	6.04 60.4	7.55 75.5	9.05 90.5	10.19 101.9	12.22 122.2	13.58 135.8	16.30 163.0	20 200	20 200	20 200

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.

* █ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 20N·m/200kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K91□90F□-SU	1200	1.70 17.0	2.04 20.4	2.84 28.4	3.40 34.0	4.25 42.5	5.10 51.0	5.67 56.7	6.38 63.8	7.65 76.5	9.19 91.9	10.21 102.1	11.48 114.8	13.78 137.8	16.53 165.3	18.37 183.7	22.96 229.6	27.56 275.6	30 300						
K9P□BU, BUF	90	0.56 5.6	0.67 6.7	0.93 9.3	1.12 11.2	1.40 14.0	1.68 16.8	1.86 18.6	2.10 21.0	2.52 25.2	3.02 30.2	3.35 33.5	3.77 37.7	4.53 45.3	5.43 54.3	6.04 60.4	7.55 75.5	9.05 90.5	10.19 101.9	12.22 122.2	13.58 135.8	16.30 163.0	20.37 203.7	24.45 244.5	27.16 271.6

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K91□90F□-SU	1200	1.77 17.7	2.13 21.3	2.96 29.6	3.55 35.5	4.43 44.3	5.32 53.2	5.91 59.1	6.65 66.5	7.98 79.8	9.58 95.8	10.64 106.4	11.97 119.7	14.37 143.7	17.24 172.4	19.16 191.6	23.95 239.5	28.74 287.4	30 300						
K9P□BU, BUF	90	0.56 5.6	0.67 6.7	0.93 9.3	1.12 11.2	1.40 14.0	1.68 16.8	1.86 18.6	2.10 21.0	2.52 25.2	3.02 30.2	3.35 33.5	3.77 37.7	4.53 45.3	5.43 54.3	6.04 60.4	7.55 75.5	9.05 90.5	10.19 101.9	12.22 122.2	13.58 135.8	16.30 163.0	20.37 203.7	24.45 244.5	27.16 271.6
	200V/220V/ 230V/240V/ 50Hz	0.63 6.3	0.76 7.6	1.05 10.5	1.26 12.6	1.58 15.8	1.90 19.0	2.11 21.1	2.37 23.7	2.84 28.4	3.41 34.1	3.79 37.9	4.26 42.6	5.12 51.2	6.14 61.4	6.82 68.2	8.53 85.3	10.24 102.4	11.51 115.1	13.82 138.2	15.35 153.5	18.42 184.2	23.03 230.3	27.63 276.3	30 300

* Gearhead and decimal gearhead are sold separately.


* The code in □ of gearhead model is for gear ratio.

* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 30N·m/300kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

CONNECTION DIAGRAMS

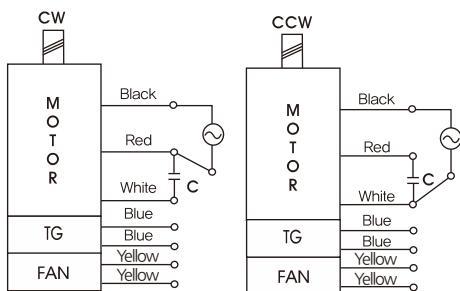

※The direction of motor rotation is as viewed from the front shaft end of the motor

GEARHEADS

DIMENSIONS

K9P□B



K9P□BF, BUF




K9P□BU




DECIMAL GEARHEAD

K9P10BX

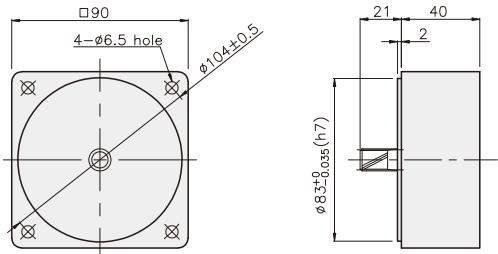


KEY SPEC

• KEY

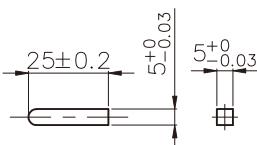


• KEY GROOVE




GEARHEAD


K9P□B

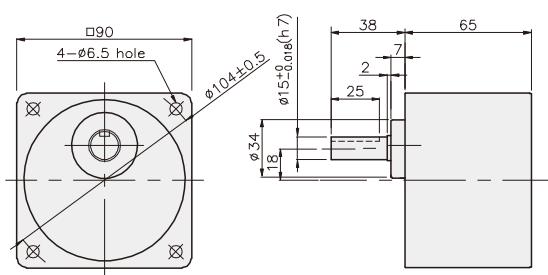


K9P□BF

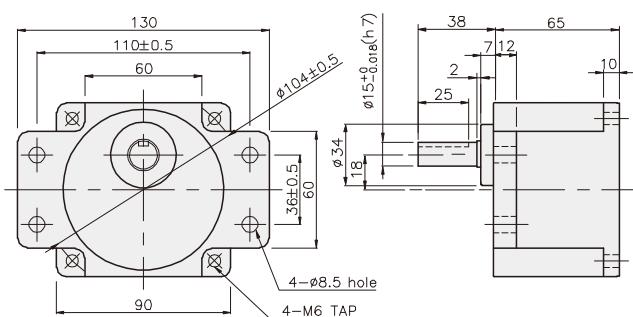

K9P□BU

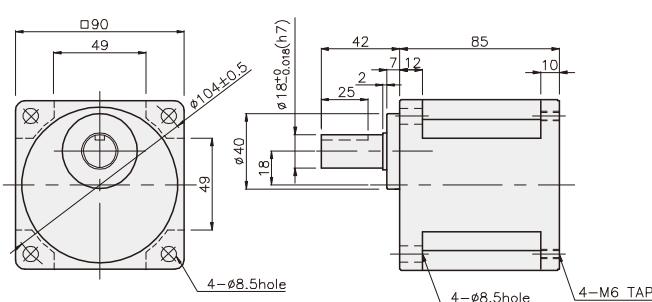

K9P□BUF

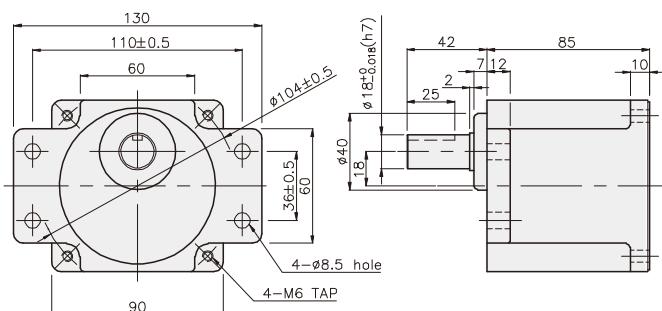

GEARHEADS

K9IP90F□-SU + K9P□B




K9IP90F□-SU + K9P□BF, BUF



K9IP90F□-SU + K9P□BU




K9IP90F□-SU + K9P□B

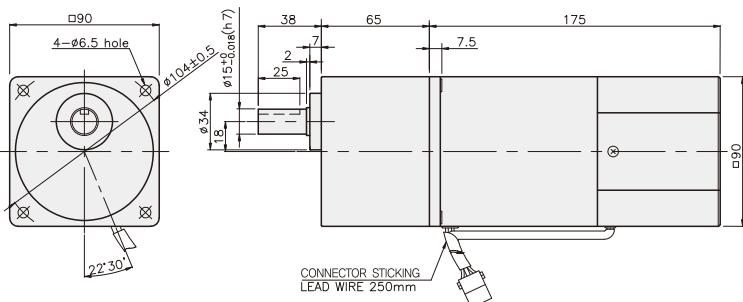

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.06
DECIMAL GEAR HEAD	0.62


K9IP90F□-SU + K9P□BF

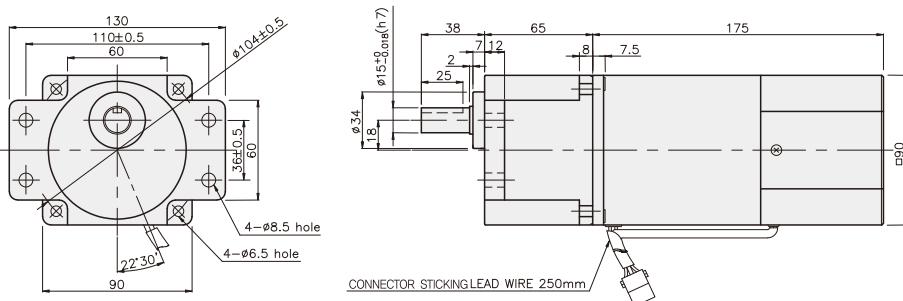

DIMENSION TABLE

DIMENSION TABLE			
PART No.	L	Application Model	Mounting BOLT
01	65	K9P3~200B	M6 P1.0 X 95
02	40	K9P10BY	M6 P1.0 X 110


K9IP90F□-SU + K9P□BU

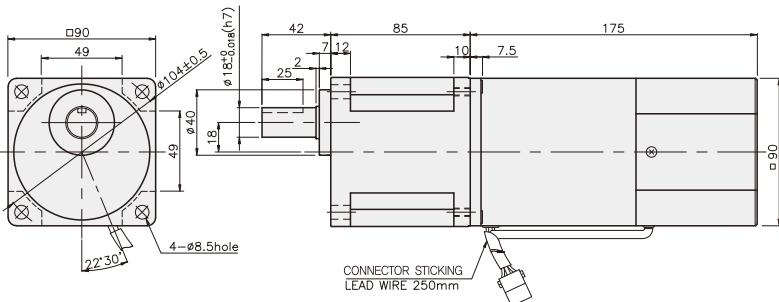

DIMENSION TABLE

DIMENSION TABLE			
PART No.	L	Application Model	Mounting BOLT
01	65	K9P3~200BF	M6 P1.0 X 25
02	10	K9P3~200BF	M6 P1.0 X 25

K9IP90F□-SU + K9P□BUF

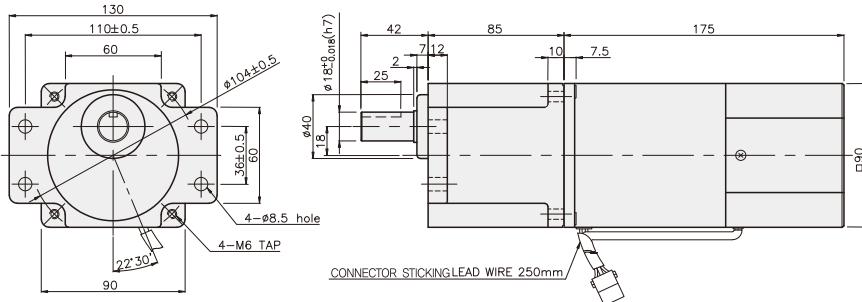

ANSWER

DIMENSION TABLE				
PART No.	L	Application Model	Mounting	BOLT
01	85	K9P3~200BUF	M6 P1.0 X 20	

1

WEIGHT	
PART	WEIGHT(kg)
K9P3~10BUF	1,50
K9P12,5~20BUF	1,62
K9P25~60BUF	1,76
K9P75~200BUF	1,82


SPEED CONTROL MOTOR - SU SERIES

120W

□ 90mm

INDUCTION MOTOR

K9IS120F□-SU

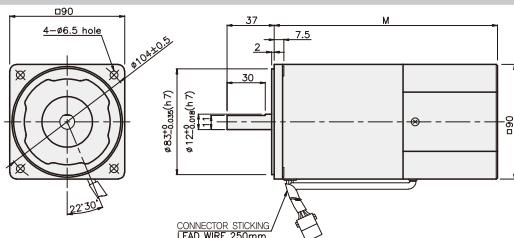

DIMENSION TABLE

PART No	M	Application Model
01	195	50Hz
02	175	60Hz

* 50Hz motor is "C50" added to model number.

SPECIFICATIONS

120W continuous rating, four poles

Model	Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N*m/Kgf*cm)	Current (A)	Condenser (μF)
				1200rpm (N*m/Kgf*cm)	90rpm (N*m/Kgf*cm)			
K9I□120FJ-SU	100	50	90 ~ 1400	0.83/8.3	0.3/3	0.4/4	3.4	35
		60	90 ~ 1700			0.45/4.5		
K9I□120FU-SU	110	60	90 ~ 1700	0.83/8.3	0.3/3	0.45/4.5	3.2	30
K9I□120FL-SU	200	50	90 ~ 1400	0.83/8.3	0.28/2.8	0.4/4	1.4	8.5
		60	90 ~ 1700					
K9I□120FC-SU	220	50	90 ~ 1400	0.83/8.3	0.28/2.8	0.4/4	1.2	6
K9I□120FD-SU	230	60	90 ~ 1400	0.8/8	0.3/3	0.45/4.5	1.4	7
K9I□120FD-SU	240	50	90 ~ 1400	0.83/8.3	0.28/2.8	0.4/4	1.3	6

※ □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□120F□-SU	1200	2.02 20.2	2.42 24.2	3.36 33.6	4.03 40.3	5.04 50.4	6.05 60.5	6.72 67.2	7.56 75.6	9.08 90.8	10.89 108.9	12.10 121.0	13.61 136.1	16.34 163.4	19.60 196.0	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200
	K9P□B, BF	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	2.73 27.3	3.28 32.8	3.94 39.4	4.37 43.7	4.92 49.2	5.90 59.0	7.09 70.9	7.87 78.7	9.84 98.4	11.81 118.1	13.29 132.9	15.94 159.4	17.71 177.1	20 200	20 200	20 200	20 200

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	
Motor/Gearhead	Speed(rpm)																									
K9I□120F□-SU	1200	2.02 20.2	2.42 24.2	3.36 33.6	4.03 40.3	5.04 50.4	6.05 60.5	6.72 67.2	7.56 75.6	9.08 90.8	10.89 108.9	12.10 121.0	13.61 136.1	16.34 163.4	19.60 196.0	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	
	K9P□B, BF	1.94 19.4	2.33 23.3	3.24 32.4	3.89 38.9	4.86 48.6	5.83 58.3	6.48 64.8	7.29 72.9	8.75 87.5	10.50 105.0	11.66 116.6	13.12 131.2	15.75 157.5	18.90 189.0	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	
K9I□120F□-SU	90	0.68 6.8	0.82 8.2	1.13 11.3	1.36 13.6	1.70 17.0	2.04 20.4	2.27 22.7	2.55 25.5	3.06 30.6	3.67 36.7	4.08 40.8	4.59 45.9	5.51 55.1	6.61 66.1	7.35 73.5	9.19 91.9	11.02 110.2	12.40 124.0	14.89 148.9	16.53 165.3	19.84 198.4	20 200	20 200	20 200	20 200
	K9P□B, BF	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	2.73 27.3	3.28 32.8	3.94 39.4	4.37 43.7	4.92 49.2	5.90 59.0	7.09 70.9	7.87 78.7	9.84 98.4	11.81 118.1	13.29 132.9	15.94 159.4	17.71 177.1	20 200	20 200	20 200	20 200	20 200

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.

* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 20N·m/200kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□120F□-SU	1200	2.02 20.2	2.42 24.2	3.36 33.6	4.03 40.3	5.04 50.4	6.05 60.5	6.72 67.2	7.56 75.6	9.08 90.8	10.89 108.9	12.10 121.0	13.61 136.1	16.34 163.4	19.60 196.0	21.78 217.8	27.23 272.3	30 300	30 300	30 300	30 300	30 300	30 300	30 300	30 300
K9P□BU, BUF	90	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	2.73 27.3	3.28 32.8	3.94 39.4	4.37 43.7	4.92 49.2	5.90 59.0	7.09 70.9	7.87 78.7	9.84 98.4	11.81 118.1	13.29 132.9	15.94 159.4	17.71 177.1	21.26 212.6	26.57 265.7	30 300	30 300

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□120F□-SU	1200	2.02 20.2	2.42 24.2	3.36 33.6	4.03 40.3	5.04 50.4	6.05 60.5	6.72 67.2	7.56 75.6	9.08 90.8	10.89 108.9	12.10 121.0	13.61 136.1	16.34 163.4	19.60 196.0	21.78 217.8	27.23 272.3	30 300	30 300						
K9P□BU, BUF	90	1.94 19.4	2.33 23.3	3.24 32.4	3.89 38.9	4.86 48.6	5.83 58.3	6.48 64.8	7.29 72.9	8.75 87.5	10.50 105.0	11.66 116.6	13.12 131.2	15.75 157.5	18.90 189.0	21.00 210.0	26.24 262.4	30 300	30 300						
	200V/220V/230V 240V/50Hz	0.68 6.8	0.82 8.2	1.13 11.3	1.36 13.6	1.70 17.0	2.04 20.4	2.27 22.7	2.55 25.5	3.06 30.6	3.67 36.7	4.08 40.8	4.59 45.9	5.51 55.1	6.61 66.1	7.35 73.5	9.19 91.9	11.02 110.2	12.40 124.0	14.88 148.8	16.53 165.3	19.84 198.4	24.80 248.0	29.76 297.6	30 300
	200V/220V/230V 240V/60Hz	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	2.73 27.3	3.28 32.8	3.94 39.4	4.37 43.7	4.92 49.2	5.90 59.0	7.09 70.9	7.87 78.7	9.84 98.4	11.81 118.1	13.29 132.9	15.94 159.4	17.71 177.1	21.26 212.6	26.57 265.7	30 300	30 300

* Gearhead and decimal gearhead are sold separately.


* The code in □ of gearhead model is for gear ratio.

* █ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 30N·m / 300kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

CONNECTION DIAGRAMS

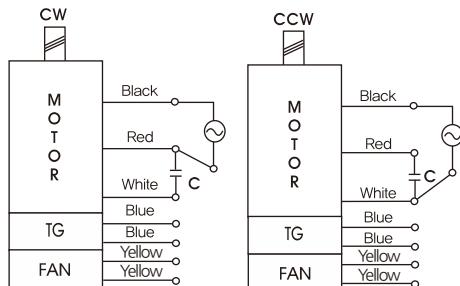

※The direction of motor rotation is as viewed from the front shaft end of the motor

GEARHEADS

DIMENSIONS

K9P□B



K9P□BF, BUF




K9P□BU




DECIMAL GEARHEAD

K9P10BX

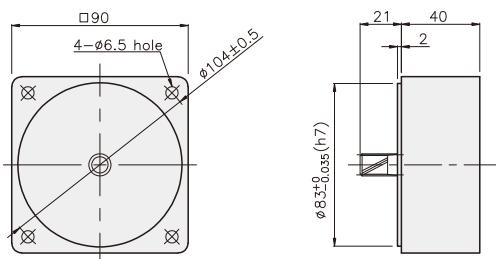


KEY SPEC

• KEY

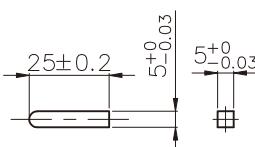


• KEY GROOVE




GEARHEAD


K9P□B

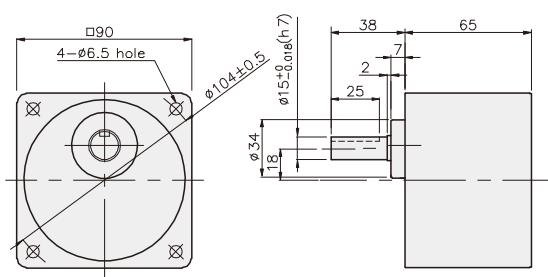


K9P□BF

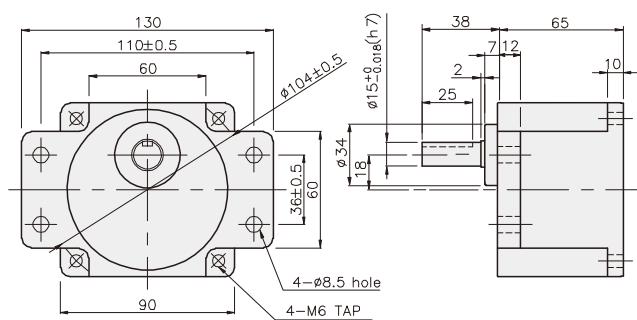

K9P□BU

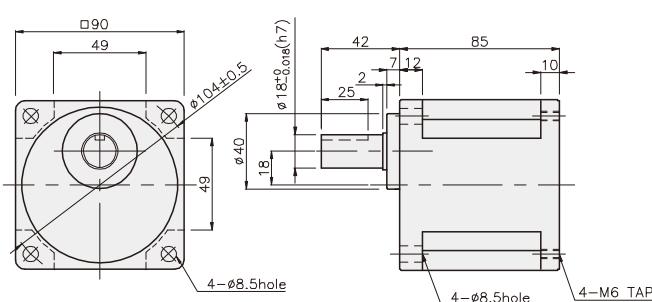

K9P□BUF

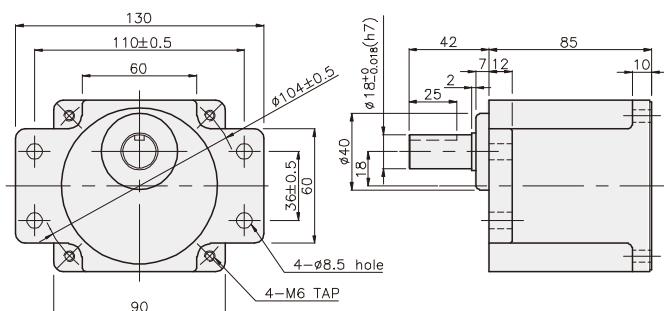

GEARHEADS

DIMENSIONS

K9IP120F□-SU + K9P□B




K9IP120F□-SU + K9P□BF, BUF



K9IP120F□-SU + K9P□BU



K9IP120F□-SU + K9P□B

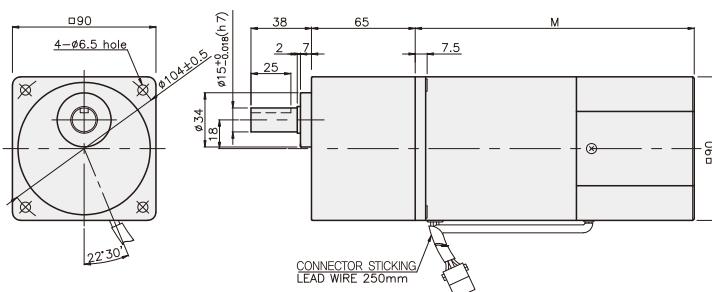


WEIGHT

PART	WEIGHT(kg)
MOTOR	3.54
DECIMAL GEAR HEAD	0.62

DIMENSION TABLE

PART No.	M	Application Model
01	155	50Hz
02	135	60Hz

K9IP120F□-SU + K9P□BF

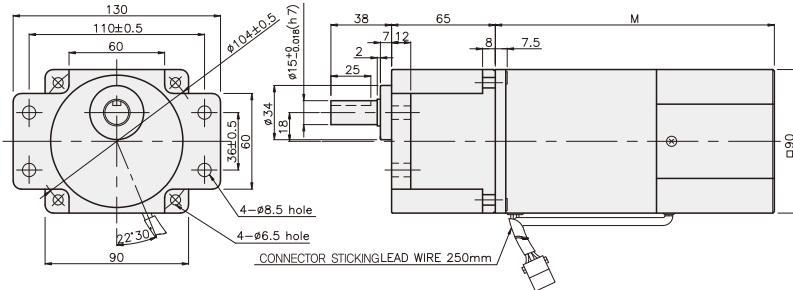


WEIGHT

PART	WEIGHT(kg)
K9P3~10B	1.22
K9P12.5~20B	1.32
K9P25~60B	1.42
K9P75~200B	1.45

DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	65	K9P3~200BF	M6 P1.0 X 25
02	40	K9P10BX	M6 P1.0 X 65

K9IP120F□-SU + K9P□BU

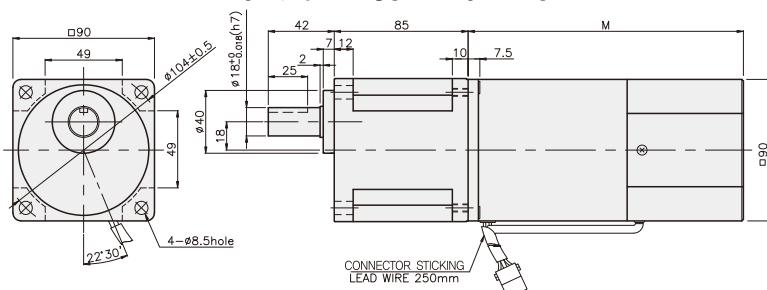

WEIGHT

PART	WEIGHT(kg)
K9P3~10BF	1.22
K9P12.5~20BF	1.30
K9P25~60BF	1.42
K9P75~200BF	1.44


DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	85	K9P3~200BU	M6 P1.0 X 20
02	40	K9P10BX	M6 P1.0 X 60

WEIGHT

PART	WEIGHT(kg)
K9P3~10BU	1.44
K9P12.5~20BU	1.55
K9P25~60BU	1.69
K9P75~200BU	1.74

K9IP120F□-SU + K9P□BUF

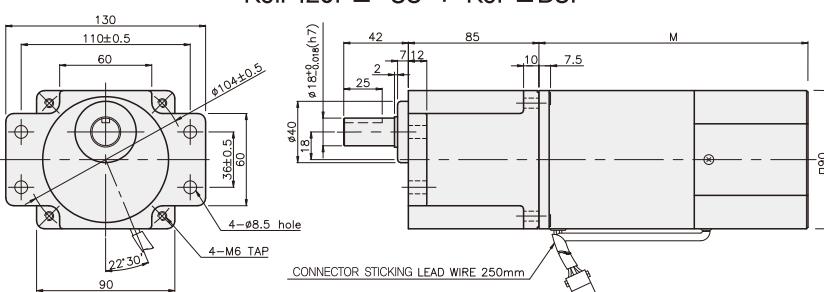

DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	85	K9P3~200BUF	M6 P1.0 X 20
02	40	K9P10BX	M6 P1.0 X 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BUF	1.50
K9P12.5~20BUF	1.62
K9P25~60BUF	1.76
K9P75~200BUF	1.82


SPEED CONTROL MOTOR - SU SERIES

180W

□ 90mm

INDUCTION MOTOR

K9IS180F□-SU

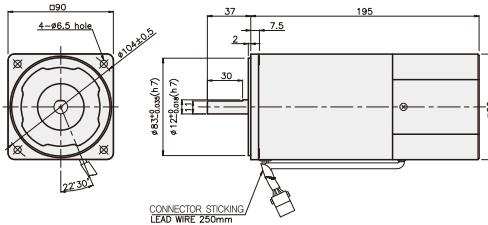

SPECIFICATIONS

180W continuous rating, four poles

Model	Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N*m/Kgf*cm)	Current (A)	Condenser (μF)
				1200rpm (N*m/Kgf*cm)	90rpm (N*m/Kgf*cm)			
K9I□180FJ-SU	100	50	90 ~ 1400	0.9/9	0.35/3.5	0.6/6	5.2	50
		60	90 ~ 1700			0.65/6.5	5.5	
K9I□180FU-SU	110	60	90 ~ 1700	0.9/9	0.35/3.5	0.52/5.2	4.8	35
						0.55/5.5	5	
K9I□180FL-SU	200	50	90 ~ 1400	0.9/9	0.3/3	0.5/5	2.2	12
		60	90 ~ 1700			0.42/4.2		
K9I□180FC-SU	220	50	90 ~ 1400	0.9/9	0.3/3	0.45/4.5	2.2	8
		60	90 ~ 1700			0.42/4.2	2	
K9I□180FD-SU	230	50	90 ~ 1400	1/10	0.33/3.3	0.53/5.3	2.4	8
		60	90 ~ 1700			0.5/5	2.2	
K9I□180FD-SU	240	50	90 ~ 1400	1/10	0.33/3.3	0.6/6	2	8

※ □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□180F□-SU	1200	2.19 21.9	2.62 26.2	3.65 36.5	43.7 43.7	5.47 54.7	6.56 65.6	7.29 72.9	8.20 82.0	9.84 98.4	11.81 118.1	13.12 131.2	14.76 147.6	17.71 177.1	21.26 212.6	23.62 236.2	29.52 295.2	30 300	30 300	30 300	30 300	30 300	30 300	30 300	30 300
K9P□BU, BUF	90	0.85 8.5	1.02 10.2	1.42 14.2	1.70 17.0	2.13 21.3	2.55 25.5	2.84 28.4	3.19 31.9	3.83 38.3	4.59 45.9	5.10 51.0	5.74 57.4	6.89 82.7	8.27 91.9	9.19 114.8	11.48 137.8	13.78 155.0	15.50 186.0	18.60 206.7	20.67 248.0	24.80 300	30 300	30 300	30 300

● Single-phase 200V/240V

unit = above : N·m / below : Kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9I□180F□-SU	1200	2.19 21.9	2.62 26.2	3.65 36.5	43.7 43.7	5.47 54.7	6.56 65.6	7.29 72.9	8.20 82.0	9.84 98.4	11.81 118.1	13.12 131.2	14.76 147.6	17.71 177.1	21.26 212.6	23.62 236.2	29.52 295.2	30 300	30 300	30 300	30 300	30 300	30 300	30 300	30 300
		2.43 24.3	2.92 29.2	4.05 40.5	4.86 48.6	6.08 60.8	7.29 72.9	8.10 81.0	9.19 91.9	10.94 109.4	13.12 131.2	14.58 145.8	16.40 164.0	19.68 197	23.62 236	26.24 262	30 300	30 300							
K9P□BU, BUF	90	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	2.73 27.3	3.28 32.8	3.94 39.4	4.37 43.7	4.92 49.2	5.90 59.0	7.09 70.9	7.87 78.7	9.84 98.4	11.81 118.1	13.29 132.9	15.94 159.4	17.71 177.1	21.26 212.6	26.57 265.7	30 300	30 300
		0.80 8.0	0.96 9.6	1.34 13.4	1.60 16.0	2.00 20.0	2.41 24.1	3.34 33.4	4.01 40.1	4.81 48.1	5.35 53.5	5.41 54.1	6.50 65.0	7.79 77.9	8.66 86.6	10.83 108.3	12.99 129.2	14.61 146.1	17.54 175.4	19.49 194.9	23.38 233.8	29.23 292.3	30 300	30 300	

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* Color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 30N·m/300kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEADS

CONNECTION DIAGRAMS

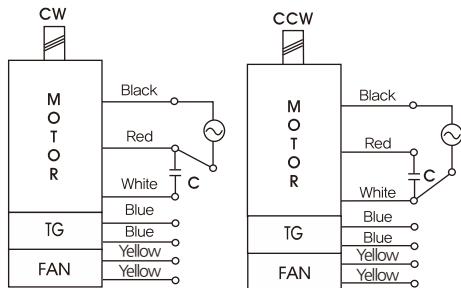

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K9P□BU




K9P□BUF




DECIMAL GEARHEAD

K9P10BX

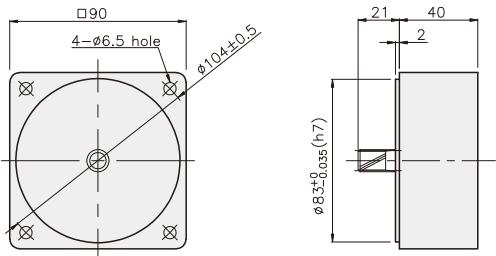


KEY SPEC

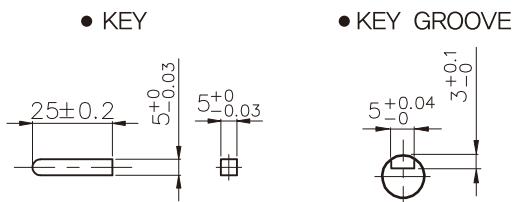


GEARHEAD

K9P□BU

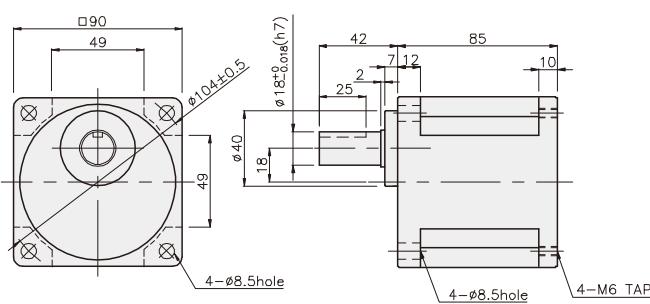

K9P□BUF

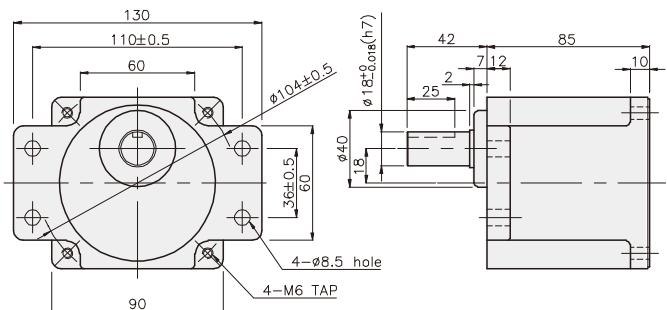

GEARHEADS

DIMENSIONS

K9IP180F□-SU + K9P□BU



K9IP180F□-SU + K9P□BUF



WEIGHT

PART	WEIGHT(kg)
MOTOR	4.24
DECIMAL GEAR HEAD	0.62

DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	85	K9P3~200B	M6 P1.0 X 20
02	40	K9P10BX	M6 P1.0 X 60

WEIGHT

PART	WEIGHT(kg)
K9P3~10BU	1.44
K9P125~20BU	1.55
K9P25~60BU	1.69
K9P75~200BU	1.74


DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	85	K9P3~200BUF	M6 P1.0 X 20
02	40	K9P10BX	M6 P1.0 X 60


WEIGHT

PART	WEIGHT(kg)
K9P3~10BUF	1.50
K9P12.5~20BUF	1.62
K9P25~60BUF	1.76
K9P75~200BUF	1.82

K9IP180F□-SU + K9P□BU

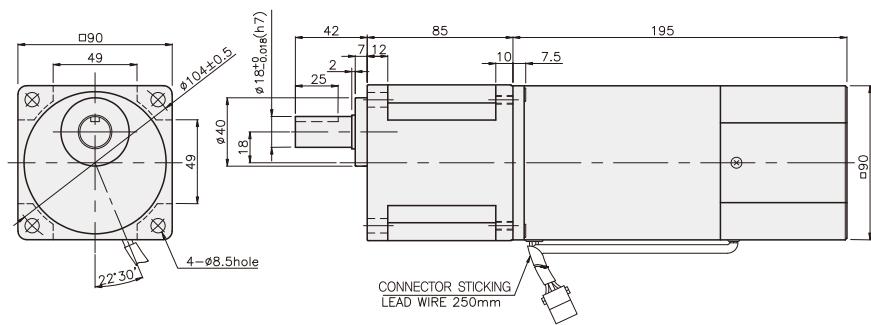

K9IP180F□-SU + K9P□BUF

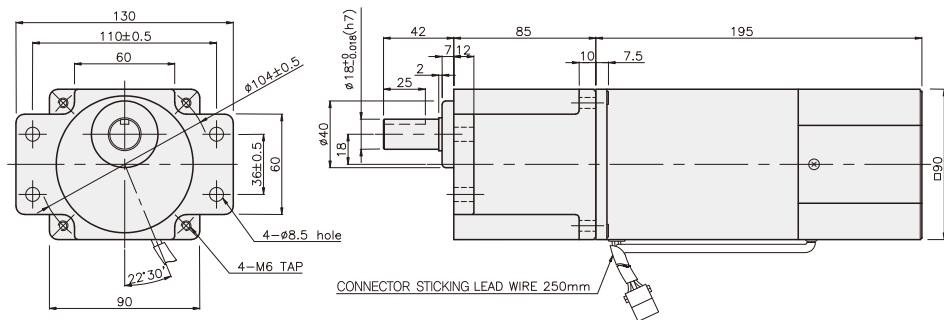



SPEED CONTROL MOTOR - SU SERIES

6W

□60mm

REVERSIBLE MOTOR

K6RS6N□-SU

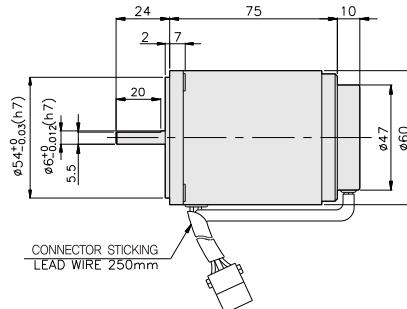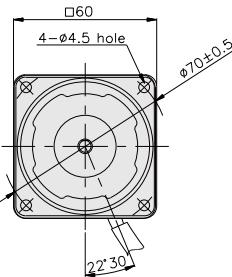

SPECIFICATIONS

6W 30 minutes rating, four poles

Model	Voltage (V)	Frequency (Hz)	Speed (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)
				1200rpm (N·m/kgf·cm)	90rpm (N·m/kgf·cm)			
K6R□6NJ-SU	100	50	90 ~ 1400	0.052/0.52	0.035/0.35	0.027/0.27	0.28	3
		60	90 ~ 1700				0.26	
K6R□6NU-SU	110	60	90 ~ 1700	0.052/0.52	0.035/0.35	0.035/0.35	0.32	2.5
K6R□6NL-SU	115	50	90 ~ 1400	0.06/0.6	0.038/0.38	0.037/0.37	0.2	1
K6R□6NC-SU	200	60	90 ~ 1700	0.052/0.52	0.03/0.3	0.035/0.35	0.2	0.8
		50	90 ~ 1400				0.033/0.33	
K6R□6NC-SU	220	60	90 ~ 1700	0.052/0.52	0.03/0.3	0.035/0.35	0.22	0.8
		50	90 ~ 1400				0.033/0.33	
K6R□6ND-SU	230	60	90 ~ 1700	0.06/0.6	0.038/0.38	0.035/0.35	0.2	0.8
		50	90 ~ 1400				0.033/0.33	
K6R□6ND-SU	240	50	90 ~ 1400	0.052/0.52	0.03/0.3	0.035/0.35	0.22	0.6
		50	90 ~ 1400				0.22	

※ □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
K6R□6N□-SU K6G□B(C)	1200	0.13	0.15	0.21	0.25	0.32	0.38	0.42	0.53	0.63	0.76	0.76	0.95	1.14	1.36	1.52	1.71	2.05	2.56	2.95	3	3	3	3	3	3
	90	1.3	1.5	2.1	2.5	3.2	3.8	4.2	5.3	6.3	7.6	7.6	9.5	11.4	13.6	15.2	17.1	20.5	25.6	29.5	30	30	30	30	30	30

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
K6R□6N□-SU K6G□B(C)	1200	0.15	0.17	0.24	0.29	0.36	0.44	0.49	0.61	0.73	0.87	0.87	1.09	1.31	1.57	1.75	1.97	2.36	2.95	3	3	3	3	3	3	3
	90	1.5	1.7	2.4	2.9	3.6	4.4	4.9	6.1	7.3	8.7	8.7	10.9	13.1	15.7	17.5	19.7	23.6	29.5	30	30	30	30	30	30	30

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

CONNECTION DIAGRAMS

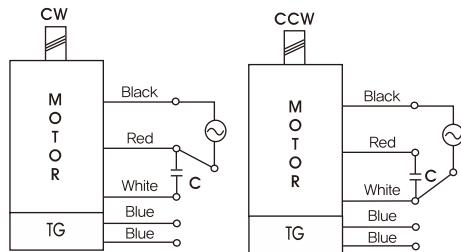

*The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K6G□B(C)




K6RG6N□-SU + K6G□B(C)




DECIMAL GEARHEAD

K6G10BX

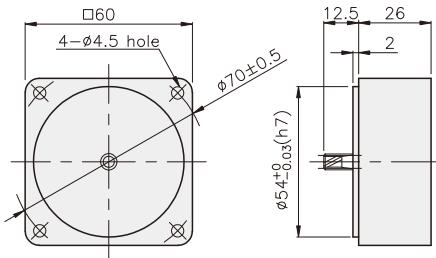

GEARHEAD

K6G□B(C)

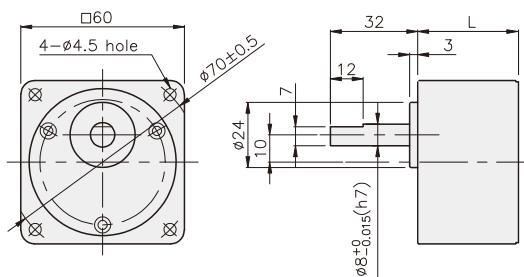


DIMENSION TABLE

PART NO.	L	Application Model	Mounting BOLT
01	30	K6G3~18B(C)	M4 P0.7 × 50
02	40	K6G20~250B(C)	M4 P0.7 × 60
03	26	K6G10BX	M4 P0.7 × 85

WEIGHT

PART	WEIGHT(kg)
MOTOR	0.79
DECIMAL GEARHEAD	0.22
GEAR HEAD	K6G3~18B(C)
	K6G20~40B(C)
	K6G50~250B(C)

K6RG6N□-SU + K6G□B(C)

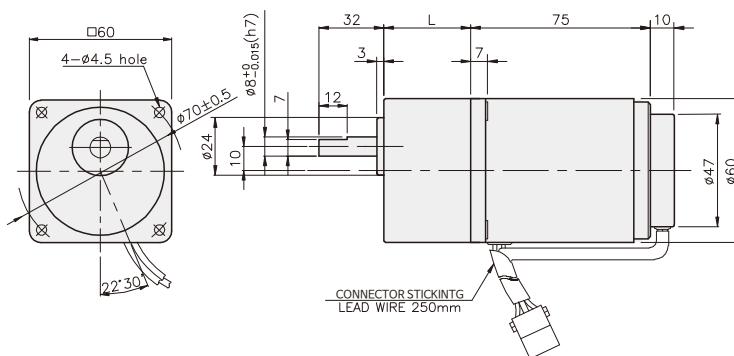


SPEED CONTROL MOTOR - SU SERIES

15W

□70mm

REVERSIBLE MOTOR

K7RS15N□-SU

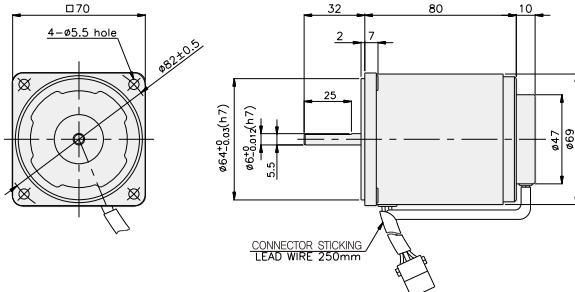

SPECIFICATIONS

15W 30 minutes rating, four poles

Model	Voltage (V)	Frequency (Hz)	Speed (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)				
				1200rpm (N·m/kgf·cm)	90rpm (N·m/kgf·cm)							
K7R□15NJ-SU	single-phase	100	50	90 ~ 1400	0.14/1.4	0.05/0.5	0.085/0.85	0.56				
			60	90 ~ 1700				0.58				
K7R□15NU-SU		110	60	90 ~ 1700				0.58				
		115						6				
K7R□15NL-SU		200	50	90 ~ 1400	0.135/1.35	0.055/0.55	0.09/0.9	0.31				
		200	60	90 ~ 1700	0.115/1.15			0.33				
K7R□15NC-SU		220	50	90 ~ 1400	0.135/1.35	0.05/0.5	0.08/0.8	0.3				
		220	60	90 ~ 1700	0.115/1.15			0.33				
		230	50	90 ~ 1400	0.135/1.35	0.055/0.55	0.085/0.85	0.3				
		230	60	90 ~ 1700	0.115/1.15			0.33				
K7R□15ND-SU		240	50	90 ~ 1400	0.135/1.35	0.05/0.5	0.09/0.9	0.34				

* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
K7R□15N□-SU	1200	0.34	0.41	0.57	0.68	0.85	1.02	1.13	1.42	1.70	2.04	2.04	2.55	3.06	3.67	4.08	4.59	5	5	5	5	5	5	5	
		3.4	4.1	5.7	6.8	8.5	10.2	11.3	14.2	17.0	20.4	20.4	25.5	30.6	36.7	40.8	45.9	50	50	50	50	50	50	50	
K7G□B(C)	90	0.12	0.15	0.20	0.24	0.30	0.36	0.41	0.51	0.61	0.73	0.73	0.91	1.09	1.31	1.46	1.64	1.97	2.46	2.95	3.28	3.94	4.92	5	5
12	1.2	1.5	2.0	2.4	3.0	3.6	4.1	5.1	6.1	7.3	7.3	9.1	10.9	13.1	14.6	16.4	19.7	24.6	29.5	32.8	39.4	49.2	50	50	

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
K7R□15N□-SU	1200	0.33	0.39	0.55	0.66	0.82	0.98	1.09	1.37	1.64	1.97	1.97	2.46	2.95	3.54	3.94	4.43	5	5	5	5	5	5	5	
		3.3	3.9	5.5	6.6	8.2	9.8	10.9	13.7	16.4	19.7	19.7	24.6	29.5	35.4	39.4	44.3	50	50	50	50	50	50	50	
	200V/230V 50Hz/60Hz	0.28	0.34	0.47	0.56	0.70	0.84	0.93	1.16	1.40	1.68	1.68	2.10	2.52	3.02	3.35	3.77	4.53	5	5	5	5	5	5	5
	240V/50Hz	2.8	3.4	4.7	5.6	7.0	8.4	9.3	11.6	14.0	16.8	16.8	21.0	25.2	30.2	33.5	37.7	45.3	50	50	50	50	50	50	50
K7G□B(C)	90	0.13	0.16	0.22	0.27	0.33	0.40	0.45	0.56	0.67	0.80	0.80	1.00	1.20	1.44	1.60	1.80	2.17	2.71	3.25	3.61	4.33	5	5	
13	1.6	2.2	2.7	3.3	4.0	4.5	5.6	6.7	8.0	8.0	10.0	12.0	14.4	16.0	18.0	21.7	27.1	32.5	36.1	43.3	50	50	50		
220V/230V 50Hz/60Hz	0.12	0.15	0.20	0.24	0.30	0.36	0.41	0.51	0.61	0.73	0.73	0.91	1.09	1.31	1.46	1.64	1.97	2.46	2.95	3.28	3.94	4.92	5	5	
240V/50Hz	1.2	1.5	2.0	2.4	3.0	3.6	4.1	5.1	6.1	7.3	7.3	9.1	10.9	13.1	14.6	16.4	19.7	24.6	29.5	32.8	39.4	49.2	50	50	

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* █ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

CONNECTION DIAGRAMS

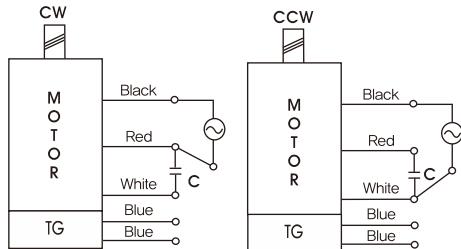

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K7G□B(C)




K7RG15N□-SU + K7G□B(C)




DECIMAL GEARHEAD

K7G10BX

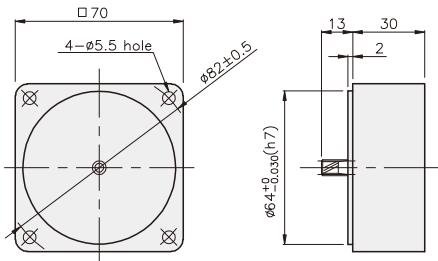


GEARHEAD

K7G□B(C)

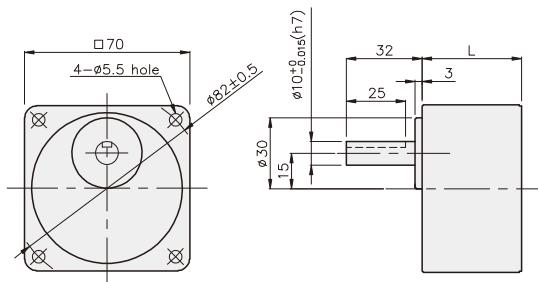


KEY SPEC

• KEY

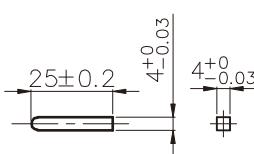

• KEY GROOVE




DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	32	K7G3~18B(C)	M5 P0.8 × 50
02	42	K7G20~200B(C)	M5 P0.8 × 65
03	30	K7G10BX	M5 P0.8 × 90

WEIGHT

PART	WEIGHT(kg)
MOTOR	1.16
DECIMAL GEARHEAD	0.32
GEAR HEAD	0.36
K7G3~18B(C)	0.46
K7G50~200B(C)	0.51

K7RG15N□-SU + K7G□B(C)

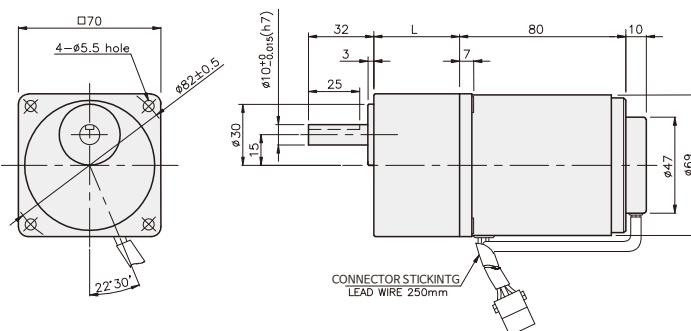



SPEED CONTROL MOTOR - SU SERIES

25W

□80mm

REVERSIBLE MOTOR

K8RS25N□-SU

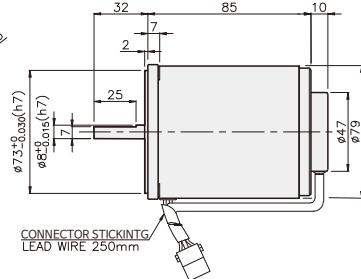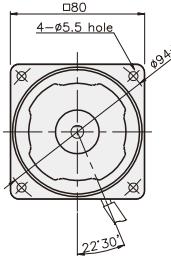

SPECIFICATIONS

25W 30 minutes rating, four poles

Model	Voltage (V)	Frequency (Hz)	Speed (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)			
				1200rpm (N·m/kgf·cm)	90rpm (N·m/kgf·cm)						
K8R□25NJ-SU	single-phase	100	50	90 ~ 1400	0.22/2.2	0.06/0.6	0.105/1.05	0.85			
			60	90 ~ 1700							
K8R□25NU-SU		110	60	90 ~ 1700			0.1/1	0.7			
K8R□25NL-SU		200	50	90 ~ 1400	0.21/2.1	0.055/0.55	0.11/1.1	0.4			
			60	90 ~ 1700							
K8R□25NC-SU		220	50	90 ~ 1400	0.21/2.1	0.055/0.55	0.09/0.9	0.4			
			60	90 ~ 1700							
		230	50	90 ~ 1400	0.21/2.1	0.055/0.55	0.1/1	2			
			60	90 ~ 1700							
K8R□25ND-SU		240	50	90 ~ 1400	0.21/2.1	0.055/0.55	0.09/0.9	0.43	1.5		

* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
K8R□25N□-SU K8G□B(C)	1200	0.53 53	0.64 64	0.89 89	1.07 107	1.34 134	1.60 160	1.78 178	2.23 223	2.67 267	3.21 321	4.01 401	4.81 481	5.77 577	6.42 642	7.22 722	8 80	8 80	8 80							
		0.15 1.5	0.17 1.7	0.24 2.4	0.29 2.9	0.36 3.6	0.44 4.4	0.49 4.9	0.61 6.1	0.73 7.3	0.87 8.7	1.09 10.9	1.31 13.1	1.57 15.7	1.75 17.5	1.97 19.7	2.36 23.6	2.95 29.5	3.54 35.4	3.94 39.4	4.72 47.2	5.90 59.0	7.09 70.9	8 80	8 80	

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
K8R□25N□-SU K8G□B(C)	1200	0.51 5.1	0.61 6.5	0.85 85	1.02 102	1.28 128	1.53 153	1.70 170	2.13 213	2.55 255	3.06 306	3.83 383	4.59 459	5.51 551	6.12 612	6.89 689	8 80									
		0.39 3.9	0.47 4.7	0.65 6.5	0.78 7.8	0.97 9.7	1.17 11.7	1.30 13.0	1.62 16.2	1.94 19.4	2.33 23.3	2.92 29.2	3.50 35.0	4.20 42.0	4.67 46.7	5.25 52.5	6.30 63.0	7.87 78.7	8 80							
		0.13 1.3	0.16 1.6	0.22 2.2	0.27 2.7	0.33 3.3	0.40 4.0	0.45 4.5	0.56 5.6	0.67 6.7	0.80 8.0	0.80 8.0	1.00 10.0	1.20 12.0	1.44 14.4	1.60 16.0	1.80 18.0	2.17 21.7	2.71 27.1	3.25 32.5	3.61 36.1	4.33 43.3	5.41 54.1	6.50 65.0	7.22 72.2	8 80
	90	0.12 1.2	0.14 1.4	0.19 1.9	0.23 2.3	0.29 2.9	0.35 3.5	0.39 3.9	0.49 4.9	0.58 5.8	0.70 7.0	0.70 7.0	0.87 8.7	1.05 10.5	1.26 12.6	1.40 14.0	1.57 15.7	1.89 18.9	2.36 23.6	2.83 28.3	3.15 31.5	3.78 37.8	4.72 47.2	5.67 56.7	6.30 63.0	7.87 78.7
		0.15 1.5	0.17 1.7	0.24 2.4	0.29 2.9	0.36 3.6	0.44 4.4	0.49 4.9	0.56 5.6	0.67 6.7	0.80 8.0	0.80 8.0	1.00 10.0	1.20 12.0	1.44 14.4	1.60 16.0	1.80 18.0	2.17 21.7	2.71 27.1	3.25 32.5	3.61 36.1	4.33 43.3	5.41 54.1	6.50 65.0	7.22 72.2	8 80
		0.12 1.2	0.14 1.4	0.19 1.9	0.23 2.3	0.29 2.9	0.35 3.5	0.39 3.9	0.49 4.9	0.58 5.8	0.70 7.0	0.70 7.0	0.87 8.7	1.05 10.5	1.26 12.6	1.40 14.0	1.57 15.7	1.89 18.9	2.36 23.6	2.83 28.3	3.15 31.5	3.78 37.8	4.72 47.2	5.67 56.7	6.30 63.0	7.87 78.7

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

CONNECTION DIAGRAMS

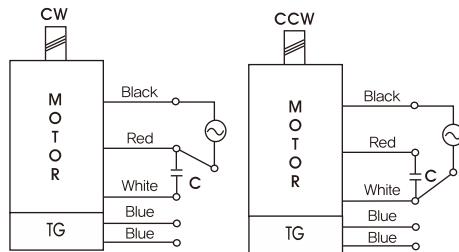

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS


K8G□B(C)




K8RG25N□-SU + K8G□B(C)



DECIMAL GEARHEAD
K8G10BX

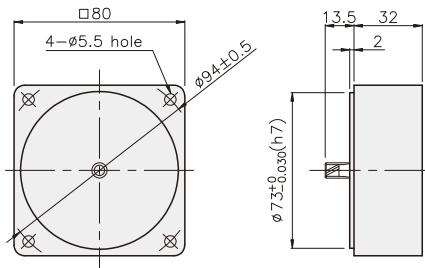


GEARHEAD
K8G□B(C)

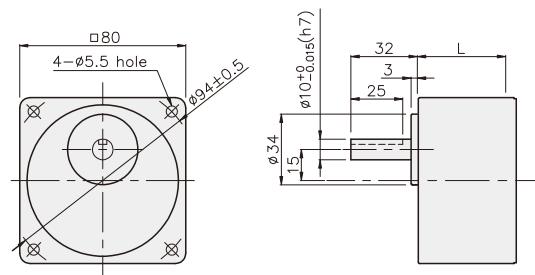


KEY SPEC

• KEY

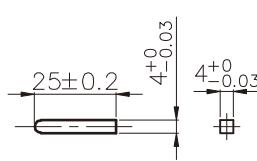

• KEY GROOVE





DIMENSION TABLE

PART No	L	Application Model	Mounting BOLT
01	32	K8G3~18B(C)	M5 P0.8 × 50
02	42.5	K8G20~250B(C)	M5 P0.8 × 65
03	32	K8G10BX	M5 P0.8 × 95

WEIGHT

PART	WEIGHT(kg)
MOTOR	1.60
DECIMAL GEARHEAD	0.46
GEAR HEAD	0.51
	0.64
	0.70

K8RG25N□-SU + K8G□B(C)

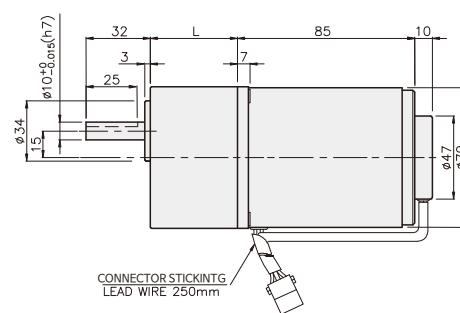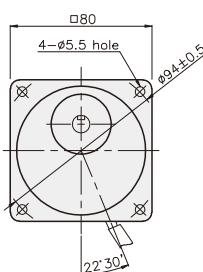



SPEED CONTROL MOTOR - SU SERIES

40W

□90mm

REVERSIBLE MOTOR

K9RS40N□-SU

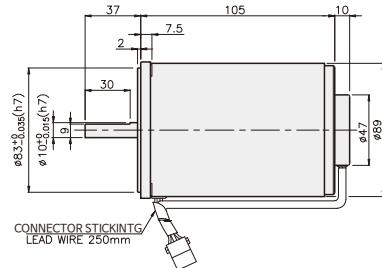

SPECIFICATIONS

40W 30 minutes rating, four poles

Model	Voltage (V)	Frequency (Hz)	Speed (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)		
				1200rpm (N·m/kgf·cm)	90rpm (N·m/kgf·cm)					
K9R□40NJ-SU	single-phase	100	50	90 ~ 1400	0.3/3	0.075/0.75	0.17/1.7	1.5		
			60	90 ~ 1700			0.18/1.8	1.6		
K9R□40NU-SU		110	60	90 ~ 1700			0.14/1.4	1.5		
							1.3	10		
K9R□40NL-SU		200	50	90 ~ 1400	0.33/3.3	0.07/0.7	0.17/1.7	0.65		
			60	90 ~ 1700	0.26/2.6		0.72	4		
K9R□40NC-SU		220	50	90 ~ 1400	0.33/3.3		0.17/1.7	0.6		
			60	90 ~ 1700	0.26/2.6		0.16/1.6	0.64		
K9R□40ND-SU		230	50	90 ~ 1400	0.33/3.3		0.17/1.7	0.6		
			60	90 ~ 1700	0.26/2.6		0.16/1.6	0.64		
		240	50	90 ~ 1400	0.33/3.3		0.16/1.6	0.63		

※ □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□40N□-SU	1200	0.63	0.76	1.05	1.26	1.58	1.90	2.11	2.63	3.16	3.79	3.79	4.74	5.69	6.82	7.58	8.53	10	10	10	10	100	100	100	100
K9G□B(C)	90	0.17	0.20	0.28	0.34	0.43	0.51	0.57	0.71	0.85	1.02	1.02	1.28	1.53	1.84	2.04	2.30	2.76	3.44	4.13	4.59	5.51	689	8.27	9.19
		1.7	2.0	2.8	3.4	4.3	5.1	5.7	7.1	8.5	10.2	10.2	12.8	15.3	18.4	20.4	23.0	27.6	34.4	41.3	45.9	55.1	689	82.7	91.9

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	
Motor/Gearhead	Speed(rpm)																									
K9R□40N□-SU	1200	0.73	0.87	1.22	1.46	1.82	2.19	2.43	3.04	3.65	4.37	4.37	5.47	6.56	7.87	8.75	10	10	10	10	100	100	100	100	100	
		7.3	8.7	12.2	14.6	18.2	21.9	24.3	30.4	36.5	43.7	43.7	54.7	65.6	78.7	87.5	100	100	100	100	100	100	100	100	100	
K9G□B(C)	200/220V 50Hz	0.56	0.67	0.93	1.12	1.40	1.68	1.86	2.33	2.79	3.35	3.35	4.19	5.03	6.04	6.71	8.38	10	10	10	10	100	100	100	100	100
	230V/60Hz	5.6	6.7	9.3	11.2	14.0	16.8	18.6	23.3	27.9	33.5	33.5	41.9	50.3	60.4	67.1	83.8	100	100	100	100	100	100	100	100	100
	90	0.15	0.18	0.26	0.31	0.38	0.46	0.51	0.64	0.77	0.92	0.92	1.15	1.38	1.65	1.84	2.07	2.48	3.10	3.72	4.13	4.96	6.20	7.44	8.27	
		1.5	1.8	2.6	3.1	3.8	4.6	5.1	6.4	7.7	9.2	9.2	11.5	13.8	16.5	18.4	20.7	24.8	31.0	37.2	41.3	49.6	62.0	74.4	82.7	

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* _____ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

CONNECTION DIAGRAMS

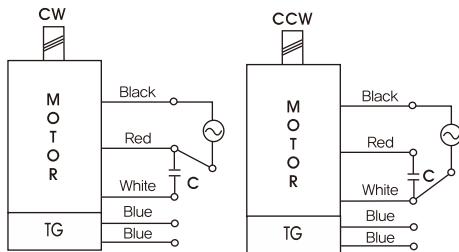

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K9G□B(C)




K9RG40N□-SU + K9G□B(C)




DECIMAL GEARHEAD

K9G10BX

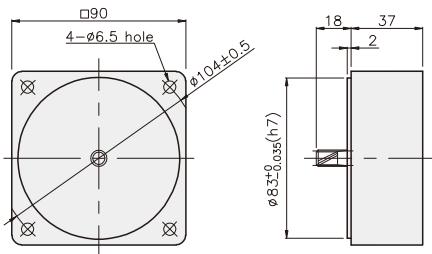


GEARHEAD

K9G□B(C)

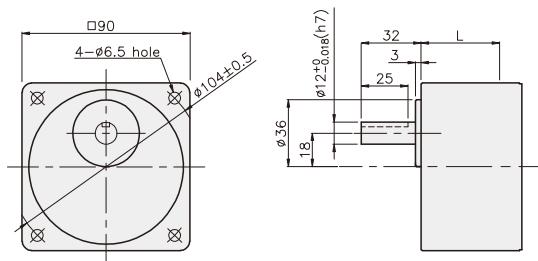


KEY SPEC

● KEY

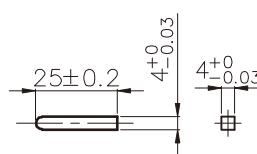

● KEY GROOVE




DIMENSION TABLE

PART No.	L	Application Model	Mounting BOLT
01	42	K9G3~18B(C)	M6 P1.0 × 65
02	60	K9G20~200B(C)	M6 P1.0 × 80
03	37	K9G10BX	M6 P1.0 × 120

WEIGHT

PART	WEIGHT(kg)
MOTOR	2.48
DECIMAL GEARHEAD	0.60
GEAR HEAD	
K9G3~18B(C)	0.78
K9G20~40B(C)	1.04
K9G50~200B(C)	1.14

K9RG40N□-SU + K9G□B(C)

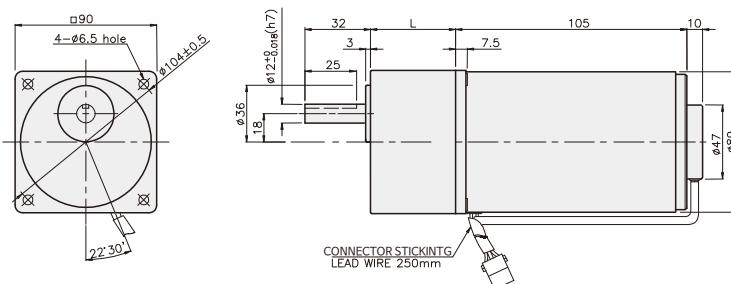


SPEED CONTROL MOTOR - SU SERIES

60W

□90mm

REVERSIBLE MOTOR

K9RS60F□-SU

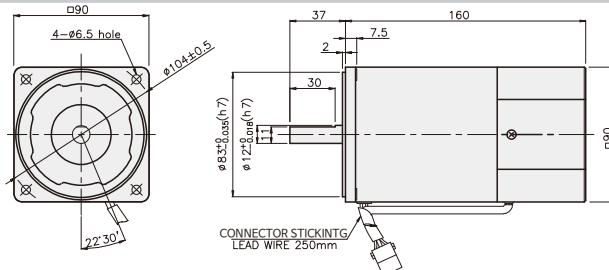

SPECIFICATIONS

60W 30 minutes rating, four poles

Model		Voltage (V)	Frequency (Hz)	Speed (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)			
					1200rpm (N·m/kgf·cm)	90rpm (N·m/kgf·cm)						
K9R□60FJ-SU	single-phase	100	50	90 ~ 1400	0.5/5	0.17/1.7	0.3/3	2.5	25			
			60	90 ~ 1700				2.7				
K9R□60FU-SU		110	60	90 ~ 1700			0.295/2.95	2.1	17			
								2.2				
K9R□60FL-SU		200	50	90 ~ 1400		0.15/1.5	0.26/2.6	0.72	6			
			60	90 ~ 1700	0.48/4.8	0.17/1.7	0.23/2.3	0.76				
K9R□60FC-SU		220	50	90 ~ 1400	0.5/5	0.15/1.5	0.3/3	0.95	5			
			60	90 ~ 1700	0.48/4.8	0.17/1.7	0.26/2.6	0.94				
		230	50	90 ~ 1400	0.5/5	0.15/1.5	0.3	1				
			60	90 ~ 1700	0.48/4.8	0.17/1.7	0.26/2.6	1.2				
K9R□60FD-SU		240	50	90 ~ 1400	0.5/5	0.15/1.5	0.32/3.2	1.2				

* □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□60F□-SU	1200	1.22	1.46	2.03	2.43	3.04	3.65	4.05	4.56	5.47	6.56	7.29	8.20	9.84	11.81	13.12	16.40	19.68	20	20	20	20	20	20	
	90	0.41	0.50	0.69	0.83	1.03	1.24	1.38	1.55	1.86	2.23	2.48	2.79	3.35	4.02	4.46	5.58	6.69	7.53	9.03	10.04	12.05	15.06	18.07	20
K9P□B, BF		4.1	5.0	6.9	8.3	10.3	12.4	13.8	15.5	18.6	22.3	24.8	27.9	33.5	40.2	44.6	55.8	66.9	75.3	90.3	100.4	120.5	150.6	180.7	200

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□60F□-SU	1200	1.22	1.46	2.03	2.43	3.04	3.65	4.05	4.56	5.47	6.56	7.29	8.20	9.84	11.81	13.12	16.40	19.68	20	20	20	20	20	20	
		12.2	14.6	20.3	24.3	30.4	36.5	40.5	45.6	54.7	65.6	72.9	82.0	98.4	118.1	131.2	164.0	196.8	200	200	200	200	200	200	
K9P□B, BF	90	0.41	0.50	0.69	0.83	1.03	1.24	1.38	1.55	1.86	2.23	2.48	2.79	3.35	4.02	4.46	5.58	6.69	7.53	9.03	10.04	12.05	15.06	18.07	20
		4.1	5.0	6.9	8.3	10.3	12.4	13.8	15.5	18.6	22.3	24.8	27.9	33.5	40.2	44.6	55.8	66.9	75.3	90.3	100.4	120.5	150.6	180.7	200

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.


* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

CONNECTION DIAGRAMS

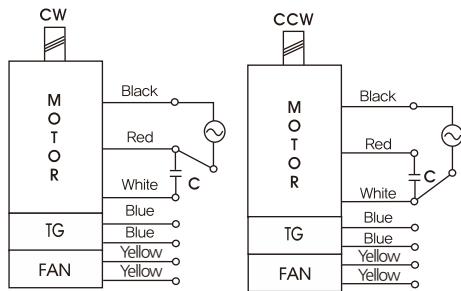

※The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K9P□B




K9P□BF





DECIMAL GEARHEAD

K9P10BX

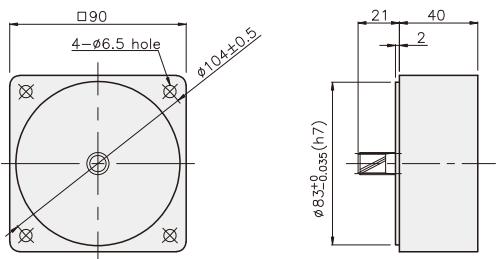


KEY SPEC

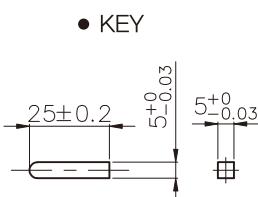


GEARHEAD

K9P□B

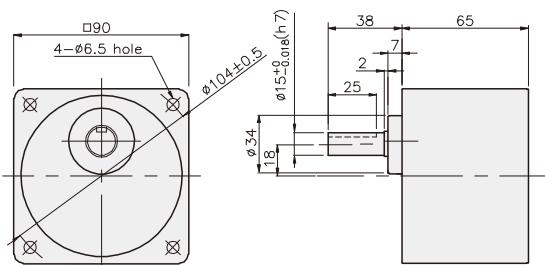

K9P□BF

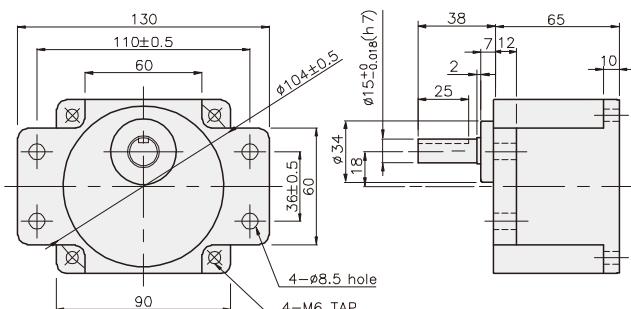

GEARHEAD

DIMENSIONS


K9RP60F□-SU + K9P□B



K9RP60F□-SU + K9P□BF



K9RP60F□-SU + K9P□B

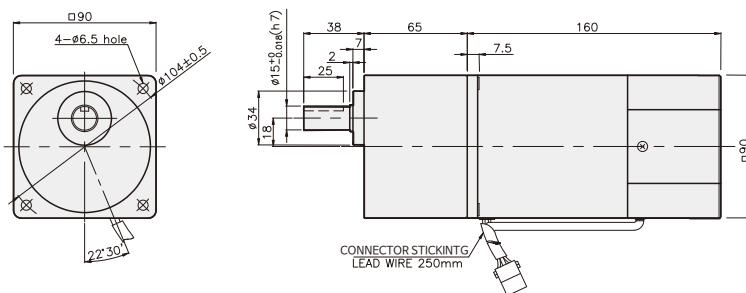


DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200B	M6 P1.0 × 95
02	K9P10BX	M6 P1.0 × 140

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.06
DECIMAL GEARHEAD	0.62
K9P3~10B	1.22
K9P12.5~20B	1.32
K9P25~60B	1.42
K9P75~200B	1.45

K9RP60F□-SU + K9P□BF

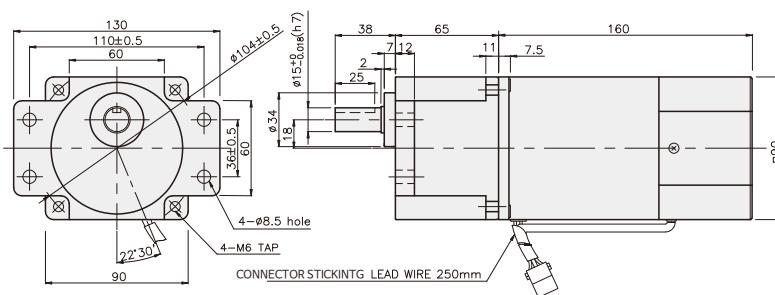

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BF	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.58
DECIMAL GEARHEAD	0.62
K9P3~10BF	1.22
K9P12.5~20BF	1.30
K9P25~60BF	1.42
K9P75~200BF	1.44


SPEED CONTROL MOTOR - SU SERIES

90W

□90mm

REVERSIBLE MOTOR

K9RS90F□-SU

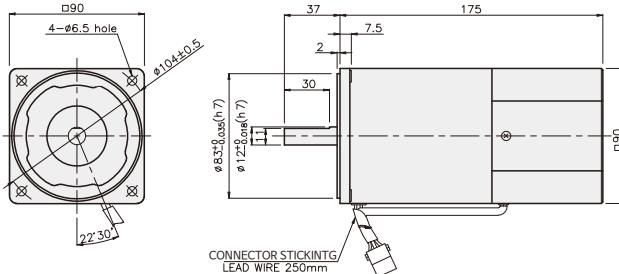

SPECIFICATIONS

90W 30 minutes rating, four poles

Model	Voltage (V)	Frequency (Hz)	Speed (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)	
				1200rpm (N·m/kgf·cm)	90rpm (N·m/kgf·cm)				
K9R□90FJ-SU	single-phase	100	50	90 ~ 1400		0.25/2.5	0.4/4	3.6 3.4	
			60	90 ~ 1700					
K9R□90FU-SU		110	60	90 ~ 1700			0.38/3.8	3 3.2	
			115						
K9R□90FL-SU		200	50	90 ~ 1400		0.75/7.5	0.25/2.5	1.4 1.5	
			60	90 ~ 1700					
K9R□90FC-SU		220	50	90 ~ 1400			0.4/4	1.2 1.4	
			60	90 ~ 1700					
K9R□90FD-SU		230	50	90 ~ 1400			0.43/4.3	1.2 1.4	
			60	90 ~ 1700					
		240	50	90 ~ 1400		0.25/2.5	0.4/4	1.3	6

※ □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□90F□-SU K9P□B, BF	1200	1.82	2.04	3.04	3.65	4.56	5.47	6.08	6.83	8.20	9.84	10.94	12.30	14.76	17.71	19.68	20	20	20	20	20	20	20	20	20
	90	0.61	0.73	1.01	1.22	1.52	1.82	2.03	2.28	2.73	3.28	3.65	4.10	4.92	5.90	6.56	8.20	9.84	11.07	13.29	14.76	17.71	20	20	20

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□90F□-SU K9P□B, BF	1200	1.82	2.19	3.04	3.65	4.56	5.47	6.08	6.83	8.20	9.84	10.94	12.30	14.76	17.71	19.68	20	20	20	20	20	20	20	20	20
	90	0.61	0.73	1.01	1.22	1.52	1.82	2.03	2.28	2.73	3.28	3.65	4.10	4.92	5.90	6.56	8.20	9.84	11.07	13.29	14.76	17.71	20	20	20
	90	0.61	0.73	1.01	1.22	1.52	1.82	2.03	2.28	2.73	3.28	3.65	4.10	4.92	5.90	6.56	8.20	9.84	11.07	13.29	14.76	17.71	200	200	200

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.

* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□90F□-SU	1200	1.82	2.19	3.04	3.65	4.56	5.47	6.08	6.83	8.20	9.84	10.94	12.30	14.76	17.71	19.68	24.60	29.52	30	30	30	30	30	30	30
		182	21.9	30.4	36.5	45.6	54.7	60.8	68.3	82.0	98.4	109.4	123.0	147.6	177.1	196.8	246	295	300	300	300	300	300	300	300
K9P□BU, BUF	90	0.61	0.73	1.01	1.22	1.52	1.82	2.03	2.28	2.73	3.28	3.65	4.10	4.92	5.90	6.56	8.20	9.84	11.07	13.29	14.76	17.71	22.14	26.57	29.52
		6.1	7.3	10.1	12.2	15.2	18.2	20.3	22.8	27.3	32.8	36.5	41.0	49.2	59.0	65.6	82.0	98.4	110.7	132.9	147.6	177.1	221.4	265.7	295.2

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□90F□-SU	1200	1.82	2.19	3.04	3.65	4.56	5.47	6.08	6.83	8.20	9.84	10.94	12.30	14.76	17.71	19.68	24.60	29.52	30	30	30	30	30	30	30
		182	21.9	30.4	36.5	45.6	54.7	60.8	68.3	82.0	98.4	109.4	123.0	147.6	177.1	196.8	246	295	300	300	300	300	300	300	300
K9P□BU, BUF	90	0.61	0.73	1.01	1.22	1.52	1.82	2.03	2.28	2.73	3.28	3.65	4.10	4.92	5.90	6.56	8.20	9.84	11.07	13.29	14.76	17.71	22.14	26.57	29.52
		6.1	7.3	10.1	12.2	15.2	18.2	20.3	22.8	27.3	32.8	36.5	41.0	49.2	59.0	65.6	82.0	98.4	110.7	132.9	147.6	177.1	221.4	265.7	295.2
	200V/220V 230V/240V 50Hz	0.61	0.73	1.01	1.22	1.52	1.82	2.03	2.28	2.73	3.28	3.65	4.10	4.92	5.90	6.56	8.20	9.84	11.07	13.29	14.76	17.71	22.14	26.57	29.52
		6.1	7.3	10.1	12.2	15.2	18.2	20.3	22.8	27.3	32.8	36.5	41.0	49.2	59.0	65.6	82.0	98.4	110.7	132.9	147.6	177.1	221.4	265.7	295.2
	200V/220V 230V/60Hz	0.68	0.82	1.13	1.36	1.70	2.04	2.27	2.55	3.06	3.67	4.08	4.59	5.51	6.61	7.35	9.19	11.02	12.40	14.88	16.53	19.84	24.80	29.76	30
		6.8	8.2	11.3	13.6	17.0	20.4	22.7	25.5	30.6	36.7	40.8	45.9	55.1	66.1	73.5	91.9	110.2	124.0	148.8	165.3	198.4	248.0	297.6	300

* Gearhead and decimal gearhead are sold separately.


* The code in □ of gearhead model is for gear ratio.

* █ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

CONNECTION DIAGRAMS

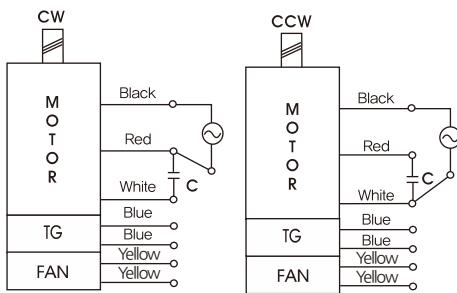

※The direction of motor rotation is as viewed from the front shaft end of the motor

GEARHEAD

DIMENSIONS

K9P□B



K9P□BF, BUF




K9P□BU





DECIMAL GEARHEAD

K9P10BX

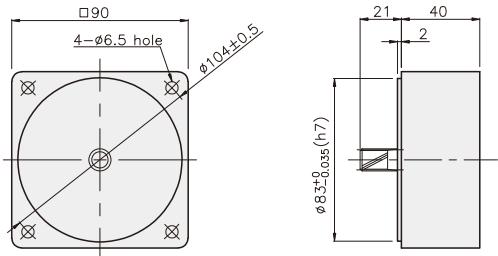


KEY SPEC




GEARHEAD


K9P□B

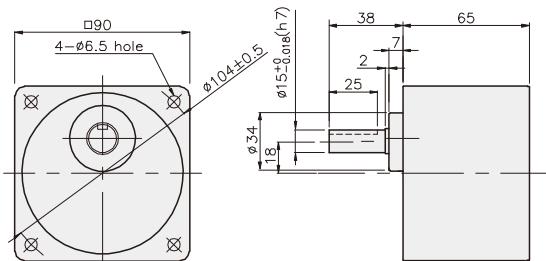


K9P□BF

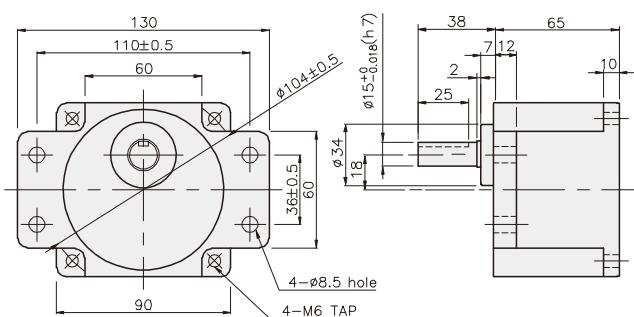

K9P□BU

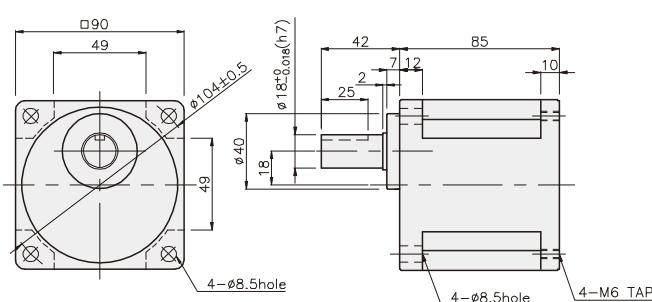

K9P□BUF

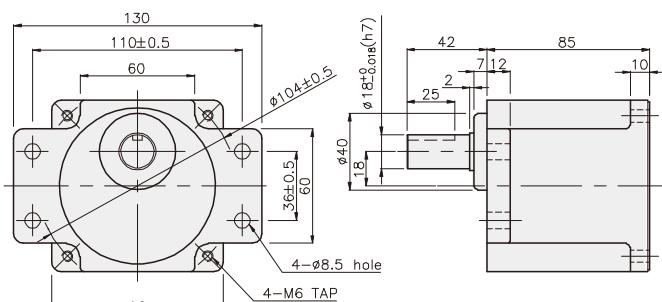

GEARHEAD

DIMENSIONS

K9RP90F□-SU + K9P□B




K9RP90F□-SU + K9P□BF, BUF




K9RP90F□-SU + K9P□BU




K9RP90F□-SU + K9P□B

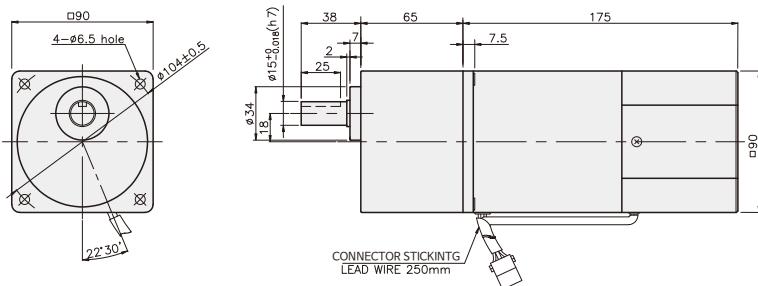


K9RP90F□-SU + K9P□BF

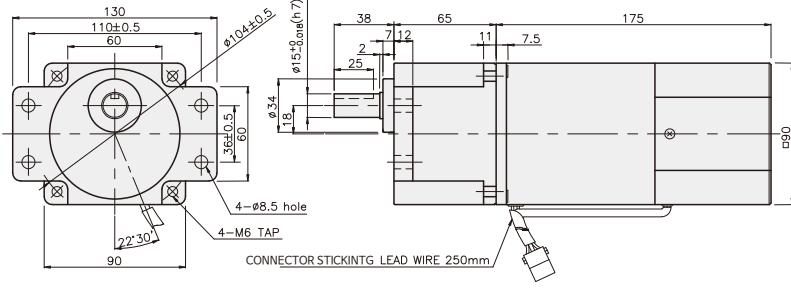

K9RP90F□-SU + K9P□BU

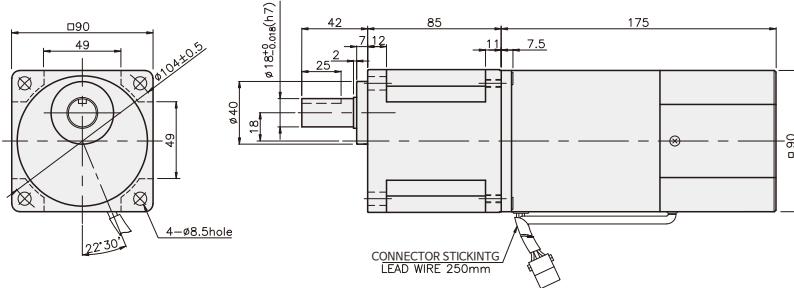

K9RP90F□-SU + K9P□BUF

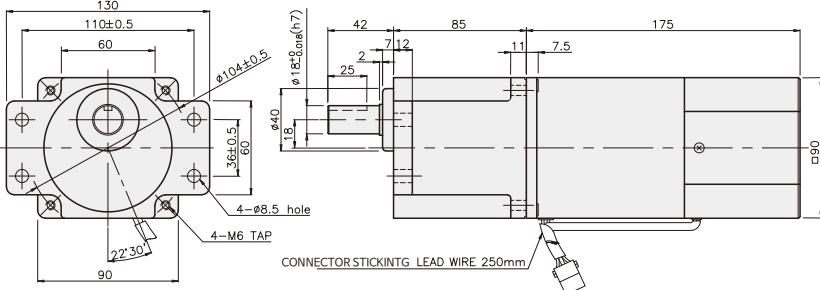

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.06
DECIMAL GEARHEAD	0.62

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200B	M6 P1.0 × 95
02	K9P10BX	M6 P1.0 × 140

WEIGHT

PART	WEIGHT(kg)
K9P3~10B	1.22
K9P12.5~20B	1.32
K9P25~60B	1.42
K9P75~200B	1.45

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BF	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BF	1.22
K9P12.5~20BF	1.30
K9P25~60BF	1.42
K9P75~200BF	1.44

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BU	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BU	1.44
K9P12.5~20BU	1.55
K9P25~60BU	1.69
K9P75~200BU	1.74

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BUF	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BUF	1.50
K9P12.5~20BUF	1.62
K9P25~60BUF	1.76
K9P75~200BUF	1.82


SPEED CONTROL MOTOR - SU SERIES

120W

□90mm

REVERSIBLE MOTOR

K9RS120F□-SU

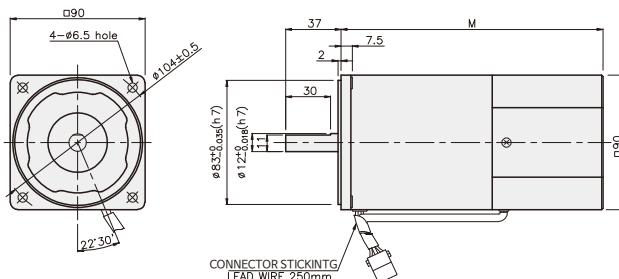

DIMENSION TABLE

PART No	M	Application Model
01	195	50Hz
02	175	60Hz

※ 50Hz motor is "C50" added to model number.

SPECIFICATIONS

120W 30 minutes rating, four poles

Model	Maximum Out Put (w)	Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)	
					1200rpm	90rpm				
					(N·m/kgf·cm)	(N·m/kgf·cm)				
single-phase	K9RP120FJ-SU K9RS120FJ-SU	120	100	50	90~1400	0.85 8.5	0.31 3.1	0.45/4.5	3.6	40
				60	90~1700			0.5/5	3.8	
	K9RP120FU-SU K9RS120FU-SU	120	110 115	60	90~1700	0.8 8	0.28 2.8	0.4 4	3	25
				200	50	90~1400	0.8/8	0.27/2.7	0.37 3.7	1.4 1.5
	K9RP120FL-SU K9RS120FL-SU	200	200	60	90~1700	0.78/7.8	0.29/2.9	8.5		
				50	90~1400	0.8 8	0.27 2.7		0.37 3.7	
			120	220 230	90~1700			1.2	6	
				60	90~1400 90~1700	0.78 7.8	0.29 2.9	0.42 4.2	1.4	
K9RP120FD-SU	120	240	50	90~1400	0.8/8	0.27/2.7	0.37/3.7	1.3	6	

※ □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□120F□-SU K9P□B, BF	1200	100V 50/60Hz	2.07 207	2.48 248	3.44 34.4	4.13 41.3	5.16 51.6	6.20 62.0	6.89 68.9	7.75 77.5	9.29 92.9	11.15 111.5	12.39 123.9	13.94 139.4	16.73 167.3	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200
		110V/115V 60Hz	1.94 19.4	2.33 23.3	3.24 32.4	3.89 38.9	4.86 48.6	5.83 58.3	6.48 64.8	7.29 72.9	8.75 87.5	10.50 105.0	11.66 116.6	13.12 131.2	15.75 157.5	18.90 189.0	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200
	90	100V 50/60Hz	0.75 7.5	0.90 9.0	1.26 12.6	1.51 15.1	1.88 18.8	2.26 22.6	2.51 25.1	2.82 28.2	3.39 33.9	4.07 40.7	4.52 45.2	5.08 50.8	6.10 61.0	7.32 73.2	8.14 81.4	10.17 101.7	12.20 122.0	13.73 137.3	16.47 164.7	18.31 183.1	20 200	20 200	20 200
		110V/115V 60Hz	0.68 6.8	0.82 8.2	1.13 11.3	1.36 13.6	1.70 17.0	2.04 20.4	2.27 22.7	2.55 25.5	3.06 30.6	3.67 36.7	4.08 40.8	4.59 45.9	5.51 55.1	6.61 66.1	7.35 73.5	9.19 91.9	11.02 110.2	12.40 124.0	14.88 148.8	16.53 165.3	19.84 198.4	20 200	20 200

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.

* □ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

RATED TORQUE OF GEARHEAD

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□120F□-SU K9P□B, BF	1200	200V/220V/ 230V/240V 50Hz	194 194	233 233	324 324	389 389	486 486	538 538	648 648	729 729	875 875	1050 1050	11.66 11.66	13.12 13.12	15.75 15.75	1890 1890	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200
		200V/220V/ 230V/ 60Hz	190 190	227 227	31.6 37.9	3.79 47.4	4.74 569	5.69 569	632 632	7.11 71.1	853 853	1024 1024	11.37 1137	12.79 127.9	15.35 153.5	1842 1842	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200	20 200
	90	200V/220V/ 230V/240V 50Hz	066 66	0.79 79	1.09 109	1.31 13.1	1.64 164	1.97 19.7	2.19 21.9	2.46 24.6	2.95 29.5	3.54 354	3.94 394	4.43 443	5.31 53.1	6.38 63.8	7.09 70.9	8.86 88.6	10.63 106.3	11.96 119.6	14.35 143.5	15.94 159.4	19.13 191.3	20 200	20 200
		200V/220V/ 230V/ 60Hz	0.70 7.0	0.85 85	1.17 11.7	1.41 14.1	1.76 17.6	2.11 21.1	2.35 23.5	2.64 26.4	3.17 31.7	3.81 38.1	4.23 42.3	4.76 47.6	5.71 57.1	6.85 68.5	7.61 76.1	9.51 95.1	11.42 114.2	12.84 128.4	15.41 154.1	17.12 171.2	20 200	20 200	20 200

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□120F□-SU K9P□BU, BUF	1200	100V/ 50/60Hz	207 207	248 248	3.44 344	4.13 413	5.16 516	6.20 620	6.89 689	7.75 775	9.29 929	11.15 11.15	12.39 1239	13.94 1394	16.73 1673	20.08 201	22.31 223	27.88 279	30 300						
		110V/115V/ 60Hz	194 194	233 233	324 324	389 389	486 486	583 583	648 648	7.29 729	8.75 87.5	10.50 105.0	11.66 1166	13.12 131.2	15.75 157.5	1890 1890	21.00 210	26.24 262	30 300						
	90	100V/ 50/60Hz	0.75 7.5	0.90 90	1.26 12.6	1.51 15.1	1.88 188	2.26 22.6	2.51 25.1	2.82 28.2	3.39 33.9	4.07 40.7	4.52 45.2	5.08 50.8	6.10 61.0	7.32 73.2	8.14 81.4	10.17 101.7	12.20 122.0	13.73 137.3	16.47 164.7	18.31 183.1	21.97 219.7	27.46 274.6	30 300
		110V/115V/ 60Hz	0.68 68	0.82 82	1.13 11.3	1.36 13.6	1.70 17.0	2.04 20.4	2.27 22.7	2.55 25.5	3.06 30.6	3.67 36.7	4.08 40.8	4.59 45.9	5.51 55.1	6.61 66.1	7.35 73.5	9.19 91.9	11.02 110.2	12.40 124.0	14.88 148.8	16.53 165.3	19.84 198.4	24.80 248.0	29.76 297.6

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□120F□-SU K9P□BU, BUF	1200	200V/220V/ 230V/240V 50Hz	194 194	233 233	324 324	389 389	486 486	583 583	648 648	7.29 729	8.75 87.5	10.50 105.0	11.66 1166	13.12 131.2	15.75 157.5	1890 1890	21.00 2100	26.24 2624	30 300						
		200V/220V/ 230V/ 60Hz	190 190	227 227	31.6 37.9	3.79 47.4	4.74 569	5.69 569	632 632	7.11 71.1	853 853	10.24 102.4	11.37 113.7	12.79 127.9	15.35 153.5	1842 1842	20.47 204.7	25.59 255.9	30 300						
	90	200V/220V/ 230V/240V 50Hz	066 66	0.79 79	1.09 10.9	1.31 13.1	1.64 164	1.97 19.7	2.19 21.9	2.46 24.6	2.95 29.5	3.54 354	3.94 394	4.43 443	5.31 53.1	6.38 63.8	7.09 70.9	8.86 88.6	10.63 106.3	11.96 119.6	14.35 143.5	15.94 159.4	19.13 191.3	23.91 239.1	28.70 287.0
		200V/220V/ 230V/ 60Hz	0.70 7.0	0.85 85	1.17 11.7	1.41 14.1	1.76 17.6	2.11 21.1	2.35 23.5	2.64 26.4	3.17 31.7	3.81 38.1	4.23 42.3	4.76 47.6	5.71 57.1	6.85 68.5	7.61 76.1	9.51 95.1	11.42 114.2	12.84 128.4	15.41 154.1	17.12 171.2	20.55 205.5	25.69 256.9	30 300

* Gearhead and decimal gearhead are sold separately.


* The code in □ of gearhead model is for gear ratio.

* color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50HZ:1500rpm, 60HZ:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

CONNECTION DIAGRAMS

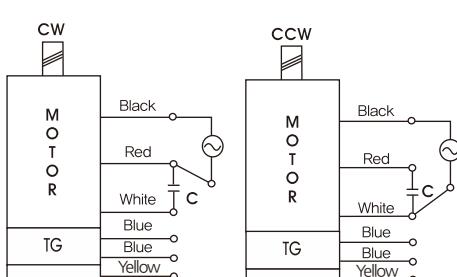

※The direction of motor rotation is as viewed from the front shaft end of the motor

GEARHEAD

DIMENSIONS

K9P□B



K9P□BF, BUF




K9P□BU





DECIMAL GEARHEAD

K9P10BX

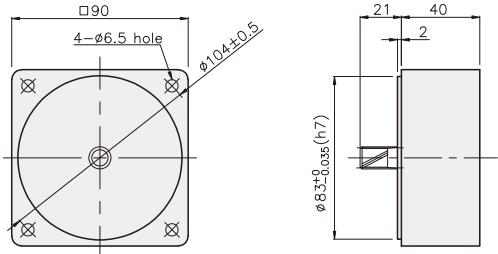


KEY SPEC




GEARHEAD


K9P□B

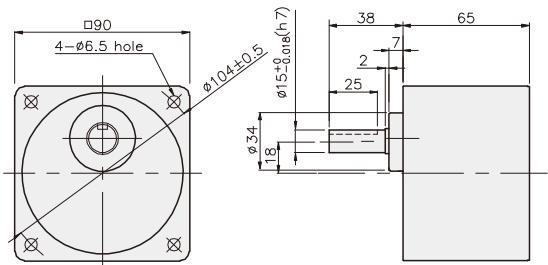


K9P□BF

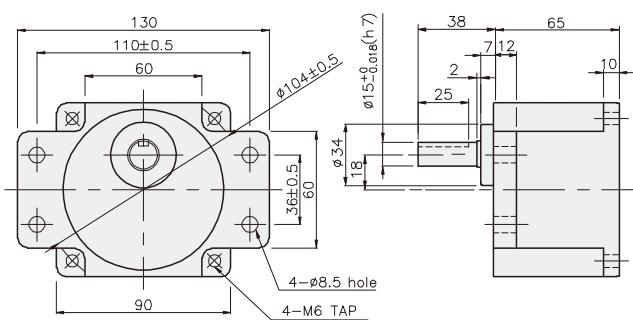

K9P□BU

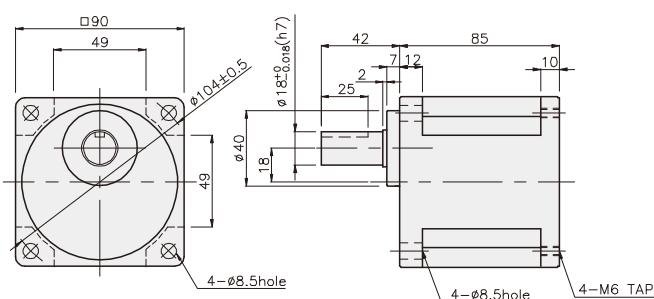

K9P□BUF

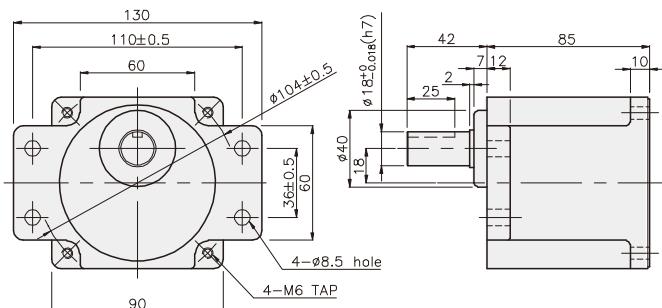

GEARHEAD

DIMENSIONS

K9RP120F□-SU + K9P□B





K9RP120F□-SU + K9P□BF, BUF



K9RP120F□-SU + K9P□BU



K9RP120F□-SU + K9P□B

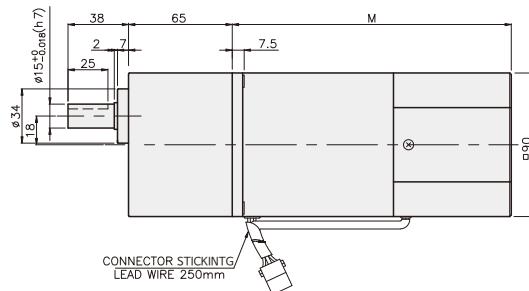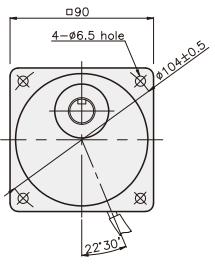

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.54
DECIMAL GEARHEAD	0.62

DIMENSION TABLE

PART No.	M	Application Model
01	155	50Hz
02	135	60Hz

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200B	M6 P1.0 × 95
02	K9P10BX	M6 P1.0 × 140

WEIGHT

PART	WEIGHT(kg)
K9P3~10B	1.22
K9P12.5~20B	1.32
K9P25~60B	1.42
K9P75~200B	1.45

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BF	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BF	1.22
K9P12.5~20BF	1.30
K9P25~60BF	1.42
K9P75~200BF	1.44

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BU	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT


PART	WEIGHT(kg)
K9P3~10BU	1.44
K9P12.5~20BU	1.55
K9P25~60BU	1.69
K9P75~200BU	1.74

DIMENSION TABLE


PART No.	Application Model	Mounting BOLT
01	K9P3~200BUF	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BUF	1.50
K9P12.5~20BUF	1.62
K9P25~60BUF	1.76
K9P75~200BUF	1.82

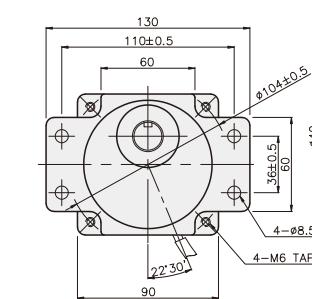

K9RP120F□-SU + K9P□BU

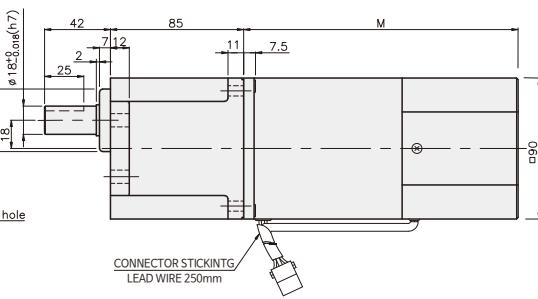


SPEED CONTROL MOTOR - SU SERIES

180W

□90mm

REVERSIBLE MOTOR

K9R180F□-SU

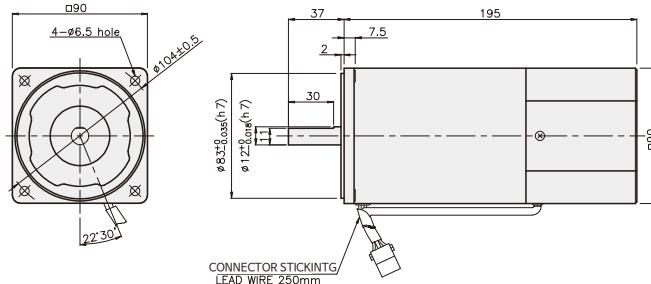

SPECIFICATIONS

180W 30 minutes rating, four poles

Model	Maximum Out Put (W)	Voltage (V)	Frequency (Hz)	Speed Range (rpm)	Permissible Torque		Start T. (N·m/kgf·cm)	Current (A)	Condenser (μF)
					1200rpm (N·m/kgf·cm)	90rpm (N·m/kgf·cm)			
K9RP180FJ-SU	single-phase	180	100	50	90~1400	0.88	0.33	0.5	5
K9RS180FJ-SU				60	90~1700	8.8	3.3	5	4.8
K9RP180FU-SU		180	110	60	90~1700	1.1	0.38	0.58	5
K9RS180FU-SU						11	3.8	5.8	4.0
K9RP180FL-SU		180	200	50	90~1400	0.88	0.3	0.45/4.5	2.2
K9RS180FL-SU				60	90~1700	8.8	3	0.38/3.8	12
K9RP180FC-SU		180	220	50	90~1400	0.88	0.3	0.42/4.2	2.2
K9RS180FC-SU				60	90~1700	8.8	3	0.38/3.8	2
K9RP180FD-SU			230	50	90~1400	0.95	0.32	0.48/4.8	2.4
K9RS180FD-SU				60	90~1700	9.5	3.2	0.45/4.5	2.2
K9RP180FD-SU		180	240	50	90~1400	0.95	0.32	0.55/5.5	2
K9RS180FD-SU						9.5	3.2		8

※ □ : SHAFT SHAPE (S : STRAIGHT, P : PINION)

RATED TORQUE OF GEARHEAD

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	
K9R□180F□-SU	1200	100V 50/60Hz	214	257	356	428	535	642	713	802	962	1155	1283	1443	1732	2079	2309	2887	30	30	30	30	30	30	30	
		110V/115V 60Hz	214	257	356	428	535	642	713	802	962	1155	1283	1443	1732	2079	2309	2887	300	300	300	300	300	300	300	
	90	100V 50/60Hz	267	321	446	535	668	802	891	1002	1203	1443	1604	1804	2165	2598	2887	30	30	30	30	30	30	30	30	
		110V/115V 60Hz	267	321	446	535	668	802	891	1002	1203	1443	1604	1804	2165	2598	2887	300	300	300	300	300	300	300	300	
	K9P□BU, BUF	100V 50/60Hz	080	096	134	160	200	241	267	301	361	433	481	541	650	779	866	1083	1299	1461	1754	1949	2338	2923	30	300
		110V/115V 60Hz	92	11.1	154	185	231	277	308	346	416	499	554	623	748	898	997	1247	1496	1683	2019	2244	2693	30	30	300

* Gearhead and decimal gearhead are sold separately.

* The code in □ of gearhead model is for gear ratio.

* Gray color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.

* If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 3N·m/30kgf·cm.

* RPM is based on motor's synchronous rpm (50Hz:1500rpm, 60Hz:1800rpm) and calculated by dividing gear ratio. Actual rpm is 2~20% less than indicating rpm according to load size.

GEARHEAD

RATED TORQUE OF GEARHEAD

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□180F□-SU K9P□BU, BUF	1200	200V/220V 50Hz/60Hz	214 21.4	257 25.7	356 35.6	428 42.8	535 53.5	642 64.2	713 71.3	802 802	962 96.2	1155 115.5	1283 128.3	1443 144.3	1732 173.2	2079 207.9	2309 230.9	2887 288.7	30 300	30 300	30 300	30 300	30 300	30 300	30 300
		230V 50Hz/60Hz 240V/50Hz	231 23.1	277 27.7	385 38.5	462 46.2	577 57.7	693 69.3	770 77.0	866 86.6	1039 103.9	1247 124.7	1385 138.5	1558 155.8	1870 187.0	2244 224.4	2493 249.3	30 300							
	90	200V/220V 50Hz/60Hz	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	2.73 27.3	3.28 32.8	3.94 39.4	4.37 43.7	4.92 49.2	5.90 59.0	7.09 70.9	7.87 78.7	9.84 98.4	11.81 118.1	13.29 132.9	15.94 159.4	17.71 177.1	21.26 212.6	26.57 265.7	30 300
		230V 50Hz/60Hz 240V/50Hz	0.78 7.8	0.93 9.3	1.30 13.0	1.56 15.6	1.94 19.4	2.33 23.3	2.59 25.9	2.92 29.2	3.50 35.0	4.20 42.0	4.67 46.7	5.25 52.5	6.30 63.0	7.56 75.6	8.40 84.0	10.50 105.0	12.60 126.0	14.17 141.7	17.01 170.1	18.90 189.0	22.67 226.7	28.34 283.4	30 300

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□180F□-DK9P□BU	1200	100V 50/60Hz	214 21.4	257 25.7	356 35.6	428 42.8	535 53.5	642 64.2	713 71.3	802 802	962 96.2	1155 115.5	1283 128.3	1443 144.3	1732 173.2	2079 207.9	2309 230.9	2887 288.7	30 300	30 300	30 300	30 300	30 300	30 300	30 300
		110V/115V 60Hz	267 26.7	321 32.1	446 44.6	535 53.5	668 66.8	802 80.2	891 89.1	1002 100.2	1203 120.3	1443 144.3	1604 160.4	1804 180.4	2165 216.5	2598 259.8	2887 288.7	30 300							
	90	100V 50/60Hz	0.80 8.0	0.96 9.6	1.34 13.4	1.60 16.0	2.00 20.0	2.41 24.1	2.67 26.7	3.01 30.1	3.61 36.1	4.33 43.3	4.81 48.1	5.41 54.1	6.50 65.0	7.79 77.9	8.66 86.6	10.83 108.3	12.99 129.9	14.61 146.1	17.54 175.4	19.49 194.9	23.38 233.8	29.23 292.3	30 300
		110V/115V 60Hz	0.92 9.2	1.11 11.1	1.54 15.4	1.85 18.5	2.31 23.1	2.77 27.7	3.08 30.8	3.46 34.6	4.16 41.6	4.99 49.9	5.54 55.4	6.23 62.3	7.48 74.8	8.98 89.8	9.97 99.7	12.47 124.7	14.96 149.6	16.83 168.3	20.19 201.9	22.44 224.4	26.93 269.3	30 300	

● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□180F□-DK9P□BU	1200	200V/220V 50Hz/60Hz	214 21.4	257 25.7	356 35.6	428 42.8	535 53.5	642 64.2	713 71.3	802 802	962 96.2	1155 115.5	1283 128.3	1443 144.3	1732 173.2	2079 207.9	2309 230.9	2887 288.7	30 300	30 300	30 300	30 300	30 300	30 300	30 300
		230V 50Hz/60Hz 240V/50Hz	231 23.1	277 27.7	385 38.5	462 46.2	577 57.7	693 69.3	770 77.0	866 86.6	1039 103.9	1247 124.7	1385 138.5	1558 155.8	1870 187.0	2244 224.4	2493 249.3	30 300							
	90	200V/220V 50Hz/60Hz	0.73 7.3	0.87 8.7	1.22 12.2	1.46 14.6	1.82 18.2	2.19 21.9	2.43 24.3	2.73 27.3	3.28 32.8	3.94 39.4	4.37 43.7	4.92 49.2	5.90 59.0	7.09 70.9	7.87 78.7	9.84 98.4	11.81 118.1	13.29 132.9	15.94 159.4	17.71 177.1	21.26 212.6	26.57 265.7	30 300
		230V 50Hz/60Hz 240V/50Hz	0.78 7.8	0.93 9.3	1.30 13.0	1.56 15.6	1.94 19.4	2.33 23.3	2.59 25.9	2.92 29.2	3.50 35.0	4.20 42.0	4.67 46.7	5.25 52.5	6.30 63.0	7.56 75.6	8.40 84.0	10.50 105.0	12.60 126.0	14.17 141.7	17.01 170.1	18.90 189.0	22.67 226.7	28.34 283.4	30 300

● Single-phase 100V/115V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□180F□-DK9P□BUF	1200	100V 50/60Hz	214 21.4	257 25.7	356 35.6	428 42.8	535 53.5	642 64.2	713 71.3	802 802	962 96.2	1155 115.5	1283 128.3	1443 144.3	1732 173.2	2079 207.9	2309 230.9	2887 288.7	30 300	30 300	30 300	30 300	30 300	30 300	30 300
		110V/115V 60Hz	267 26.7	321 32.1	446 44.6	535 53.5	668 66.8	802 80.2	891 89.1	1002 100.2	1203 120.3	1443 144.3	1604 160.4	1804 180.4	2165 216.5	2598 259.8	2887 288.7	30 300							
	90	100V 50/60Hz	0.80 8.0	0.96 9.6	1.34 13.4	1.60 16.0	2.00 20.0	2.41 24.1	2.67 26.7	3.01 30.1	3.61 36.1	4.33 43.3	4.81 48.1	5.41 54.1	6.50 65.0	7.79 77.9	8.66 86.6	10.83 108.3	12.99 129.9	14.61 146.1	17.54 175.4	19.49 194.9	23.38 233.8	29.23 292.3	30 300
		110V/115V 60Hz	0.92 9.2	1.11 11.1	1.54 15.4	1.85 18.5	2.31 23.1	2.77 27.7	3.08 30.8	3.46 34.6	4.16 41.6	4.99 49.9	5.54 55.4	6.23 62.3	7.48 74.8	8.98 89.8	9.97 99.7	12.47 124.7	14.96 149.6	16.83 168.3	20.19 201.9	22.44 224.4	26.93 269.3	30 300	


● Single-phase 200V/240V

unit = above : N·m / below : kgf·cm

Model	Ratio	3	36	5	6	7.5	9	10	125	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Motor/Gearhead	Speed(rpm)																								
K9R□180F□-DK9P□BUF																									

GEARHEAD

CONNECTION DIAGRAMS

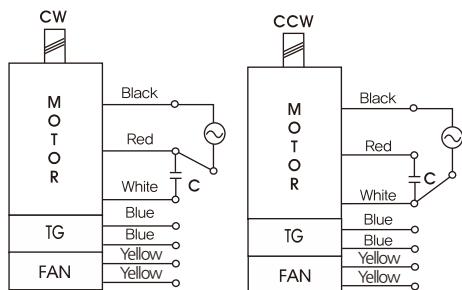

*The direction of motor rotation is as viewed from the front shaft end of the motor

DIMENSIONS

K9P□BU




K9P□BUF





DECIMAL GEARHEAD

K9P10BX

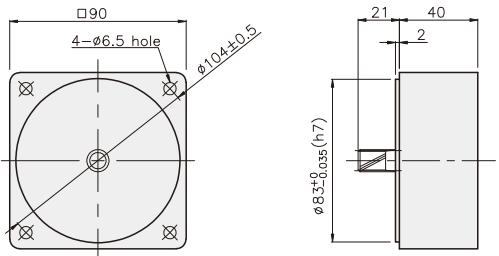


KEY SPEC

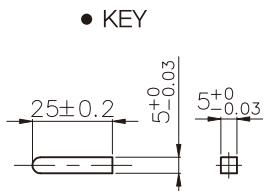


GEARHEAD

K9P□BU

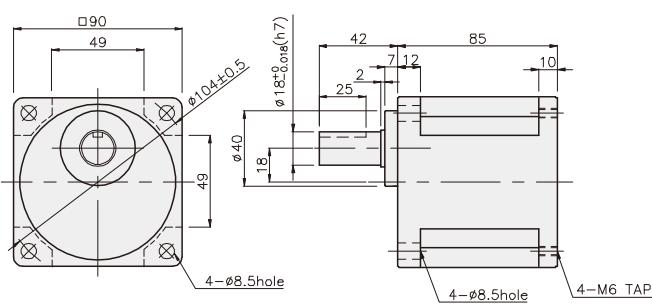

K9P□BUF

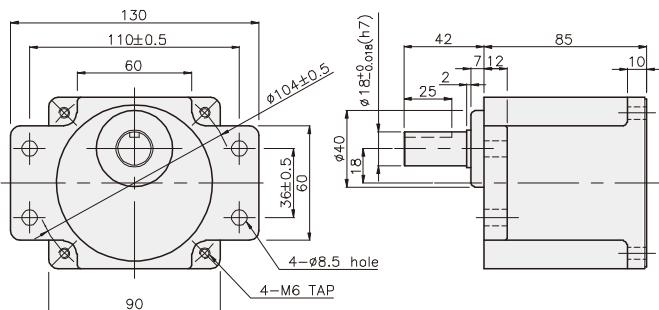

GEARHEAD

DIMENSIONS

K9RP180F□-SU + K9P□BU



K9RP180F□-SU + K9P□BUF



WEIGHT

PART	WEIGHT(kg)
MOTOR	4.24
DECIMAL GEARHEAD	0.62

DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BU	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BU	1.44
K9P12.5~20BU	1.55
K9P25~60BU	1.69
K9P75~200BU	1.74


DIMENSION TABLE

PART No.	Application Model	Mounting BOLT
01	K9P3~200BUF	M6 P1.0 × 20
02	K9P10BX	M6 P1.0 × 65

WEIGHT

PART	WEIGHT(kg)
K9P3~10BUF	1.50
K9P12.5~20BUF	1.62
K9P25~60BUF	1.76
K9P75~200BUF	1.82

K9RP180F□-SU + K9P□BU

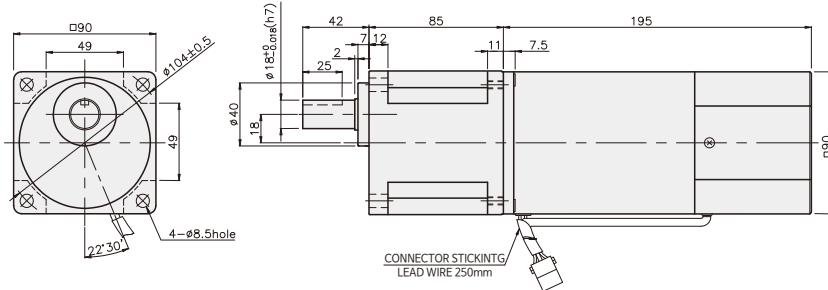

K9RP180F□-SU + K9P□BUF

