


Serie Heavy

SR310T

Nylon Cable Chain

with un-screwable aluminium draw plates

Inner height (D) 112 mm
 Strong double share Sideband & Frame construction with three large anti-friction single-pin/bush.
 Alu-draw frames are mounted on every link and are un-screwable from inner and outer radius.
 Vertical and horizontal separator systems are available.

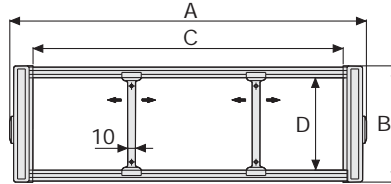

Separator	
- Unassembled	Part.no S310TCF9
- Assembled	Part.no S310TCF9MC
Pin	
	Part.no B310-PG310

Technical characteristics when self-supported


Speed	4 m/s
Acceleration	20 m/s ²

For higher requirements please consult our technical dept.

A	B	C	D	R	Weight/m	Chain
mm	mm	mm	mm	mm	kg	Part Number
260	150	200	112	200-300-400-500-600-700-750	7,15	SR310T200□□□*
360	150	300	112	200-300-400-500-600-700-750	7,60	SR310T300□□□*
460	150	400	112	200-300-400-500-600-700-750	8,05	SR310T400□□□*
560	150	500	112	200-300-400-500-600-700-750	8,50	SR310T500□□□*
660	150	600	112	200-300-400-500-600-700-750	9,00	SR310T600□□□*
C+60	150	112	200-300-400-500-600-700-750		SR310T□□□□□**

*Complete the code by inserting the value of the radius (R): Ex. SR310T200 □□□

**Complete the code by inserting the value of the quote C and the radius (R): Ex. SR310T □□□□□□

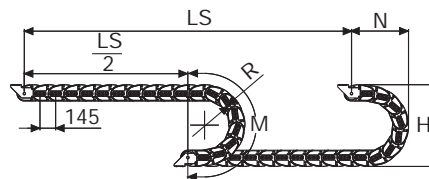

R	H	N	M
mm	mm	mm	mm
200	550	420	920
300	750	525	1235
400	950	625	1550
500	1150	720	1860
600	1350	820	2175
700	1550	920	2490
750	1650	970	2650

Length of chain (L)
 Half travel distance ($\frac{LS}{2}$)
 plus length of curve (M)

$$L = \frac{LS}{2} + M$$

