


Locking Assembly series **Confix MAV4061 stainless steel**
**Features:**

- high bending moment capacity
- self locking
- self centering
- 3-part design
- screws UNI 5931 - DIN 912

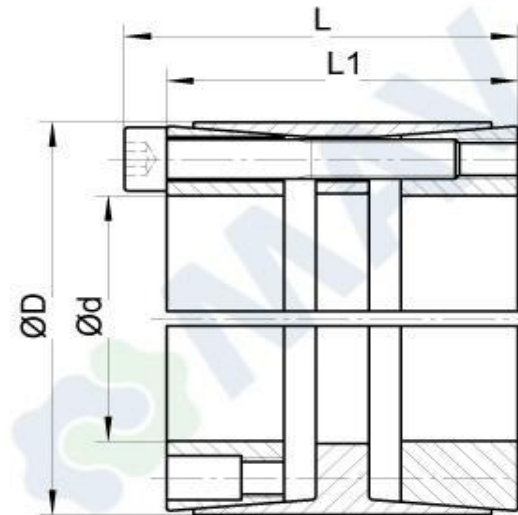

Example of order: Confix MAV4061 – 70 x 110 stainless

Dimensions			Screws		Performance			
d x D mm	L mm	L1 mm	size	Ma Nm	Mt Nm	Fax kN	Ps N/mm <sup>2</sup>	Ph N/mm <sup>2</sup>
24 x 55	46	40	M6	11,8	420	35,4	78	34
25 x 55	46	40	M6	11,8	440	35,4	75	34
28 x 55	46	40	M6	11,8	490	35,4	67	34
30 x 55	46	40	M6	11,8	530	35,4	63	34
32 x 60	60	54	M6	11,8	660	41,3	48	26
35 x 60	60	54	M6	11,8	720	41,3	44	26
38 x 75	62	54	M8	28,7	1.450	76,7	76	38
40 x 75	62	54	M8	28,7	1.530	76,7	72	38
42 x 75	62	54	M8	28,7	1.610	76,7	68	38
45 x 75	62	54	M8	28,7	1.720	76,7	64	38
48 x 80	74	66	M8	28,7	2.100	87,7	53	32
50 x 80	74	66	M8	28,7	2.190	87,7	51	32
55 x 85	74	66	M8	28,7	2.710	98,7	52	34
60 x 90	74	66	M8	28,7	3.290	109,0	53	35
65 x 95	74	66	M8	28,7	3.560	109,0	49	33
70 x 110	90	80	M10	58	6.270	179,0	58	37
75 x 115	90	80	M10	58	6.710	179,0	54	35
80 x 120	90	80	M10	58	7.880	197,0	56	37
85 x 125	90	80	M10	58	8.370	197,0	53	36
90 x 130	90	80	M10	58	9.600	215,0	54	38
95 x 135	90	80	M10	58	10.200	215,0	51	36
100 x 145	114	102	M12	100	14.400	289,0	53	36
110 x 155	114	102	M12	100	17.300	316,0	52	37
120 x 165	114	102	M12	100	22.100	368,0	56	41

Lubricant class H1, FDA approved. Information subject to change without prior notification. © MAV S.p.A  
 Distribuce: OPIS Engineering k.s. 61400 Brno, Selská 64 www.opis.cz/confix Tel 543 330 057