



# HE Catalogue High Efficiency Motors

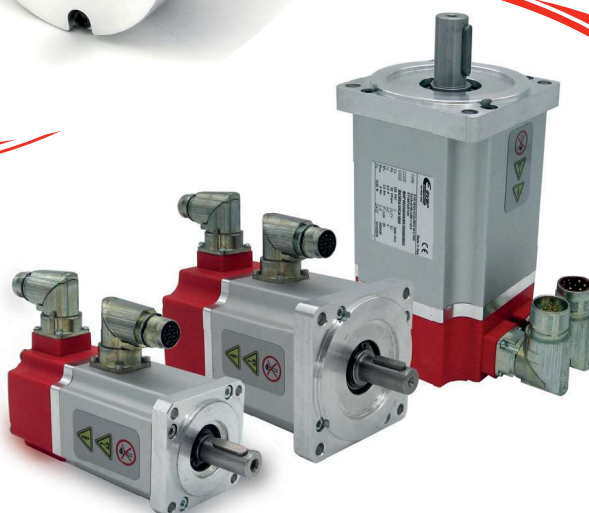

*“Quality is not random;  
it is always the result  
of intelligent effort.”*

# Index

Why should you choose EVER?	04	NEMA 08	12
High Efficiency Motors	06	NEMA 10	13
<b>Stepper Motors</b>	07	NEMA 11	from page 14 to page 18
Production Process Phases	08	NEMA 14	from page 19 to page 20
Motors Coding	10	NEMA 17	from page 21 to page 31
Motors Connection Basics	11	NEMA 23	from page 32 to page 46
		NEMA 24	from page 47 to page 52
		NEMA 34	from page 53 to page 69
		NEMA 42	from page 70 to page 71

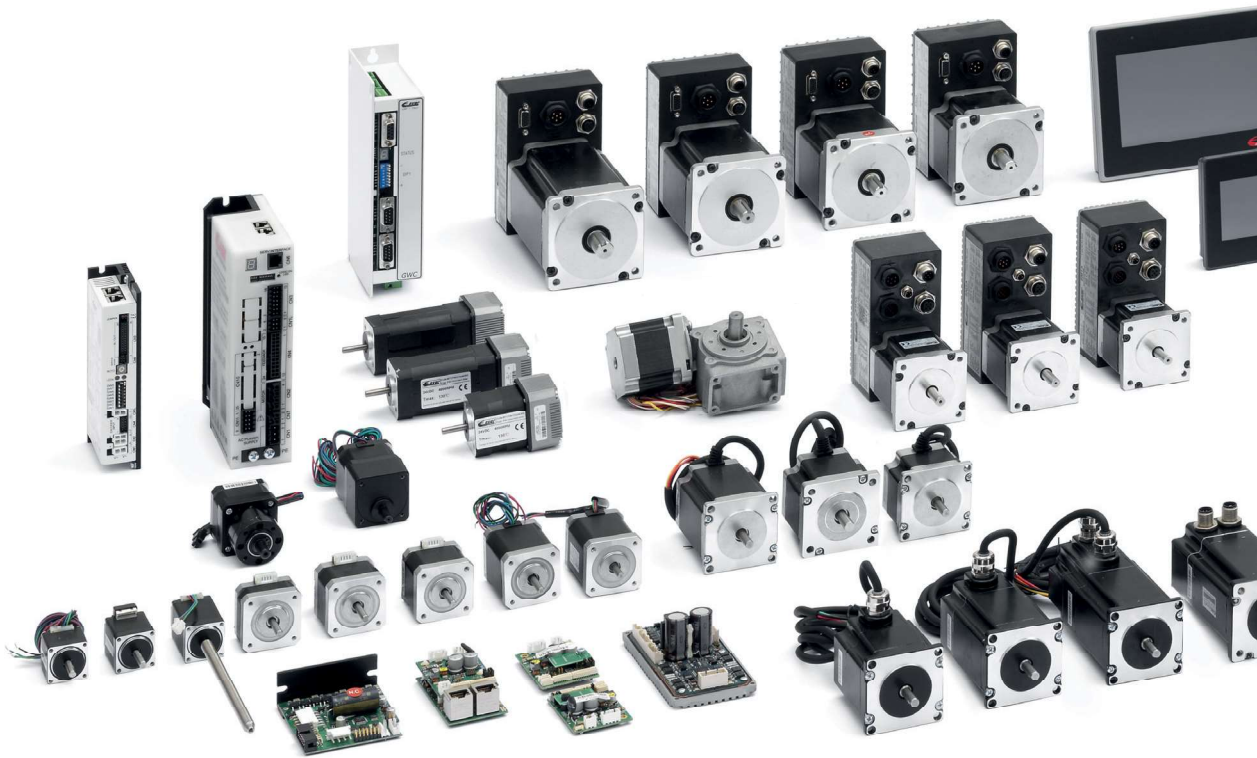

AC Brushless Motors	72	DC Brushless Motors	91
Motors Coding	73	Motors Coding	92
Rated Power 400 W from page 75 to page 78		High Voltage Geared DC Brushless Motors	103
Rated Power 750 W from page 79 to page 82		Motors Coding	104
Rated Power 1050 W from page 83 to page 86		Rated Power 120 W	105
Rated Power 1400 W from page 87 to page 90		Rated Power 200 W	108
		Motors Customizations	109



# Why should you choose EVER?



## We know the main motion control issues

and we have developed solutions for the automatic machines control through motors and drives with stepper and brushless technology

## We develop state-of-the-art motors

Team of experienced electrotechnical engineers develop motors with IP65 protection, special motor shafts, brake, incremental encoder, absolute multiturn encoder, gearbox, custom joints and pulleys and special connectors and wiring

## We don't just sell a product, we create it

The perfect synergy between internal design and production ensures the creation of quality products, checked in detail at a competitive price

## Quality

3 years warranty after sale

## A cutting-edge internal production department

works every day to always ensure products up to the customer expectation, quality and fast delivery times

## Always looking at the future

we invest most of the profits in Research and Development and in improving our production lines every year

# High Efficiency Motors

up to 40% more torque than standard stepper motors




available sizes:  
from Nema 08 to Nema 42,  
up to 30 Nm



high quality and  
dust-shielded bearings



smooth, precise and silent  
rotation thanks to  
optimized rotor and stator  
design

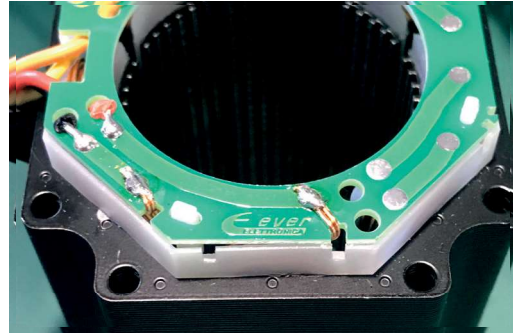

made of high quality  
magnetic materials to  
ensure long-term maximum  
performance durability



mechanically and electrically  
customizable to be integrated  
in the application requested by  
the customer







Ever Elettronica high-efficiency stepper motors are the result of the company's extensive experience in stepper motors. Our high efficiency stepper motors are distinguished from other competitors' motors due to their ability to deliver a much greater torque at the same size.



## STEPPER MOTORS





# How we produce our motors

Internal design allows us to create highly customized motors, perfectly in line with customers needs


## Production process the phases

### Endbells machining



After aluminium die-casting, the flanges are ground and machined **to ensure the precision and the customizations** required by our customers

### Rotors grinding

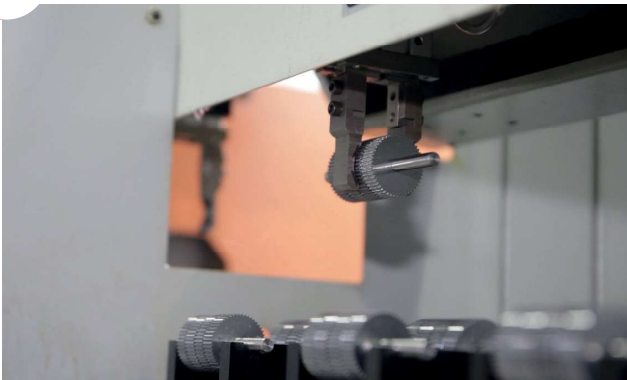

The rotors are first assembled with automatic presses, then are **resinated to ensure greater compactness and rust resistance** and finally are ground with automatic grinding machines and with micrometric precision

### Stators holing




The stators are **lapped and 100% inspected** to ensure an air gap of a few microns

## Coils winding



Each motor, whether BLDC or stepper, is wrapped with automatic winders able to guarantee **repeatability and stability in series production**

## Mechanical assembling

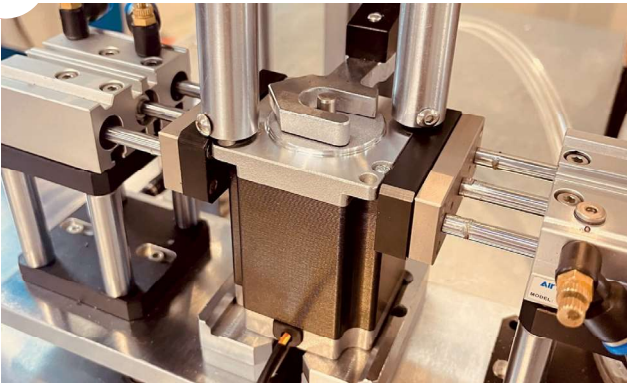


Skilled workers **assemble our motors carefully**, welding the windings to the motor cables with specifically designed PCB and ensuring optimal fixing between axles and bearings

## Magnetization




Each motor, once assembled, is magnetized **ensuring high torque performance**

## Testing phase

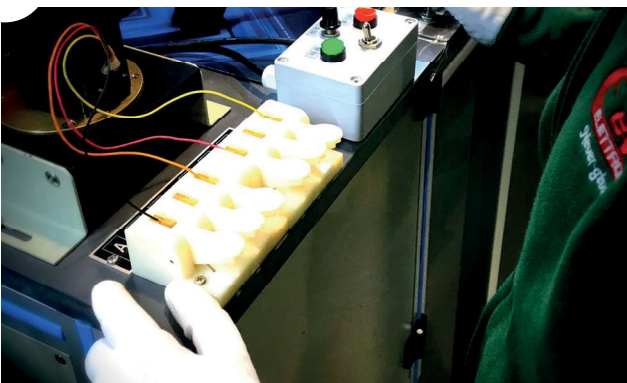

Our motors are **100% inspected**. Motors testing phase is carried out by automatic test machines. **Every data is saved in a database and traceability is guaranteed** thanks to the Serial ID printed on each motor

# Motors coding and drive pairing

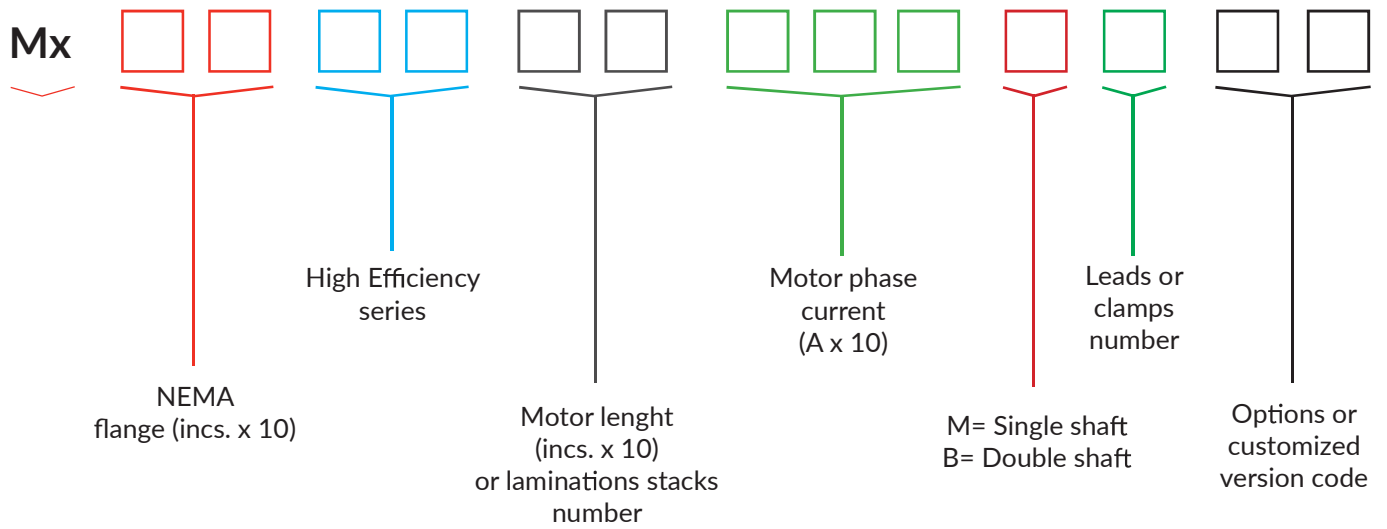

	Motor models	MT08HE	MT10HE	MT11HE	MT14HE	MT17HE	MT23HE	MT24HE	MT34HE if current <4.2 A	MT34HE if current <7.0 A	MT34HE if current >7.0 A	MT34HE high voltage
Drive model												
LW3D2030		•	•	•	•	•						
LW3D3070							•	•		•		
LW3A9030												•
SW3D2042		•	•	•	•	•	•	•	•			
SW3A9030												•
SN4D2040		•	•	•	•	•	•	•	•			
SB4D2030		•	•	•	•	•	•					
SB4A2042				•	•	•	•	•	•			
SW4D2070		•	•	•	•	•	•	•	•	•		
SW4A3070						•	•	•	•	•		
SW4A4085							•	•	•	•	•	
SW5D3070						•	•	•	•	•		
SW5A4085							•	•	•	•	•	
SW5A5080									• (if voltage < 100 Vac)	• (if voltage < 100 Vac)	• (if voltage < 100 Vac)	•
SW5A9030												•
SW5A9052									• (if voltage < 100 Vdc)			•



# Motors electrical specifications, connection modes and protection class


Connection	Resistance (ohms)	Inductance (mH)	Current (Arms)	Holding Torque (Nm)
Unipolar	As in catalog	As in catalog	As in catalog	Catalog x 0.707
Bipolar series	Catalog x 2	Catalog x 4	Catalog x 0.707	As in catalog
Bipolar (half winding)	As in catalog	As in catalog	As in catalog	Catalog x 0.707
Bipolar parallel	Catalog x 0.5	As in catalog	Catalog x 1.414	As in catalog

Connection	Resistance (ohms)	Inductance (mH)	Current (Arms)	Holding Torque (Nm)
Refer to catalog	As in catalog	As in catalog	As in catalog	Catalog x 0.707

## Bipolar parallel connection of 8 leads motors.

The bipolar parallel connection, by an higher windings current, results in good torque at low and high speeds and keeping low the winding inductance rating.


8 leads stepper motor bipolar parallel wiring diagram

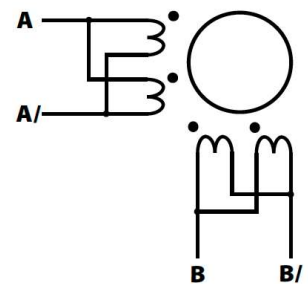

## Bipolar series connection of 8 leads motors.

The bipolar series connection, with lower windings current, is usefull to obtain the best torque at low speeds. Due to the high inductance rating resulting from windings series, the torque decays rapidly with speed increase. The use of high voltage bus can lower this drawback despite a higher motor temperature rise.

8 leads stepper motor bipolar series wiring diagram



Motor protection class	Protection index against dust	Protection index against liquids	Description of degree motor protection
IP30	3	0	Protected against ingress of solid objects larger than 2.5 mm. No protection against ingress of liquid from humidity or from dripping or splashing liquids and vapors.
IP54	5	4	Total protection against ingress of solid objects. Protection against the ingress of liquid droplets, vapor or spray from any direction.
IP65	6	5	Total protection against ingress of solids and dusts. Protection against the ingress
IP67	6	7	Totally protected against dust. Protected against the effect of liquid immersion



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +40°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 15 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40



## Other features


Connector on board with cable

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.48 V	0.40 A/ph	11.20 ohm	3.50 mH	0.015 Nm	2.00 g.cm <sup>2</sup>	40 g.	4


## Mechanical drawing

Dimensions in mm

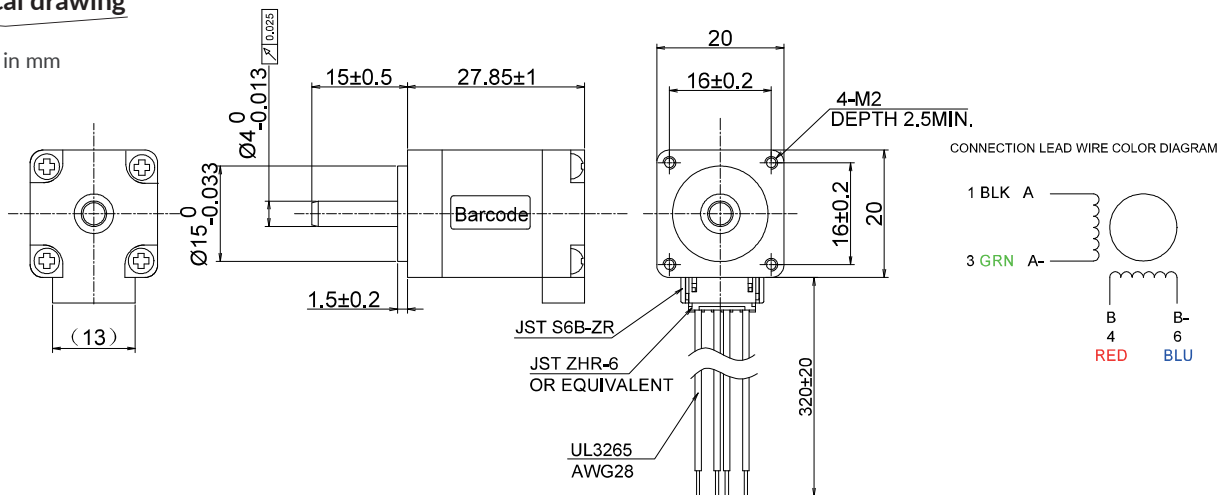

## Torque diagram

Drive conditions:  
Voltage 24 Vdc  
Current 0.4 A/ph  
Half step

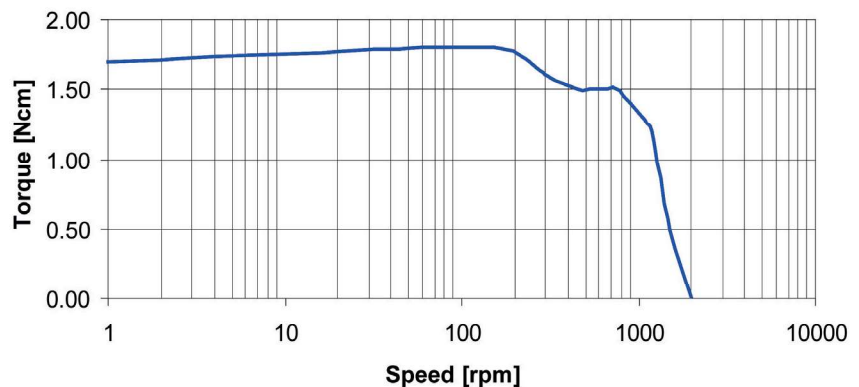







## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 14 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40




## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.50 V	1.00 A/ph	4.50 ohm	4.00 mH	0.07 Nm	9.00 g.cm <sup>2</sup>	100 g.	4

## Mechanical drawing

Dimensions in mm

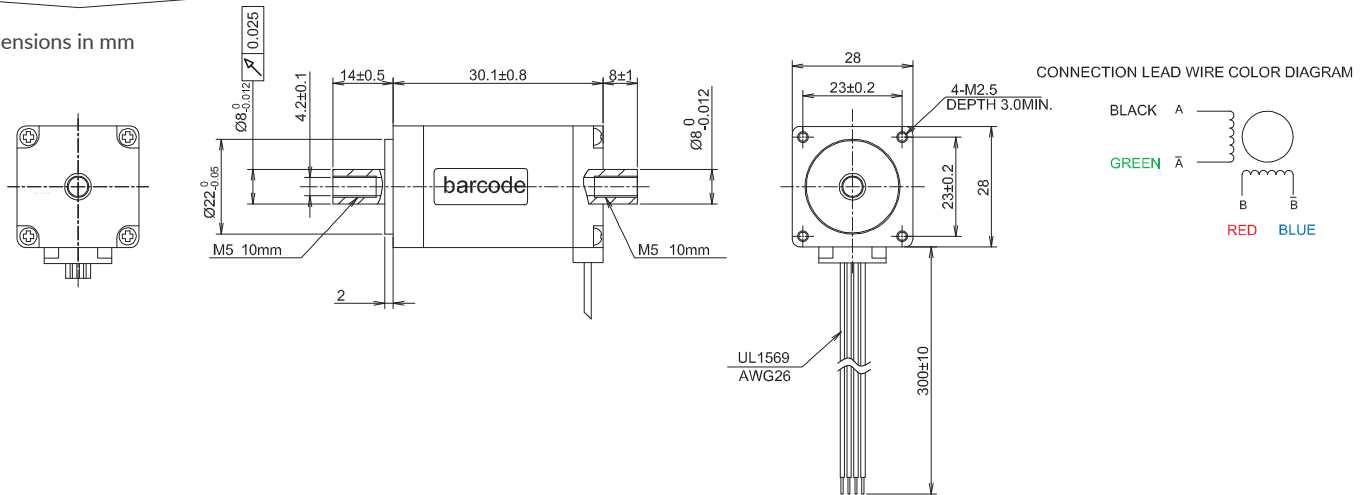





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 20 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 65



## Other features

Connector on board

## Optional


CBCP-00072: M12 5 poles femal connector and 2.5 mt. cable for motor connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
6.16 V	0.67 A/ph	9.20 ohm	7.20 mH	0.127 Nm	18.00 g.cm <sup>2</sup>	220 g.	4

## Mechanical drawing

Dimensions in mm

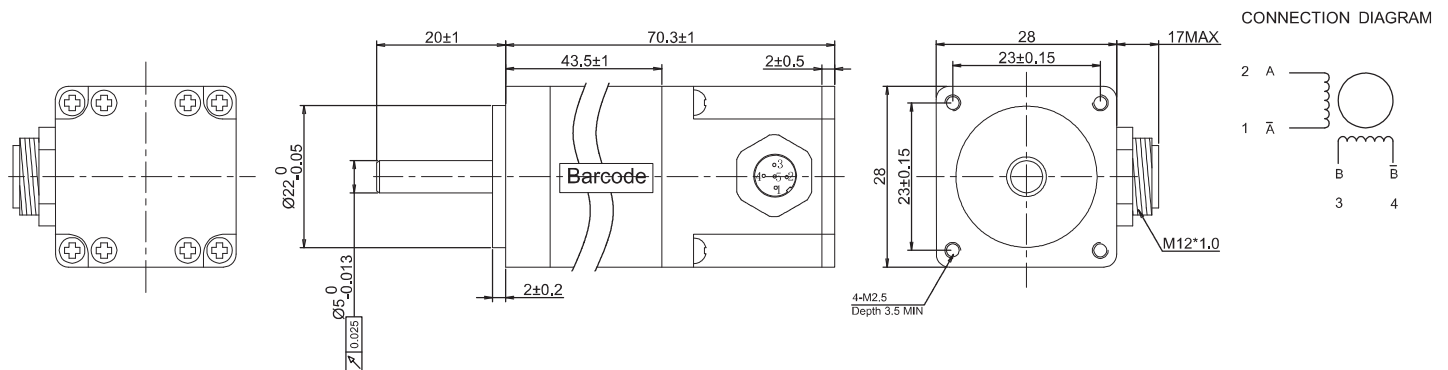



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	B, 130°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	80K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	500 Vac, 1 minute
<b>Max shaft radial load</b>	21 N at 20 mm from front flange
<b>Max shaft axial load</b>	10 N
<b>Protection IP</b>	IP 40




## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.50 V	1.00 A/ph	2.50 ohm	2.20 mH	0.14 Nm	20.00 g.cm <sup>2</sup>	200 g.	4

## Mechanical drawing


Dimensions in mm

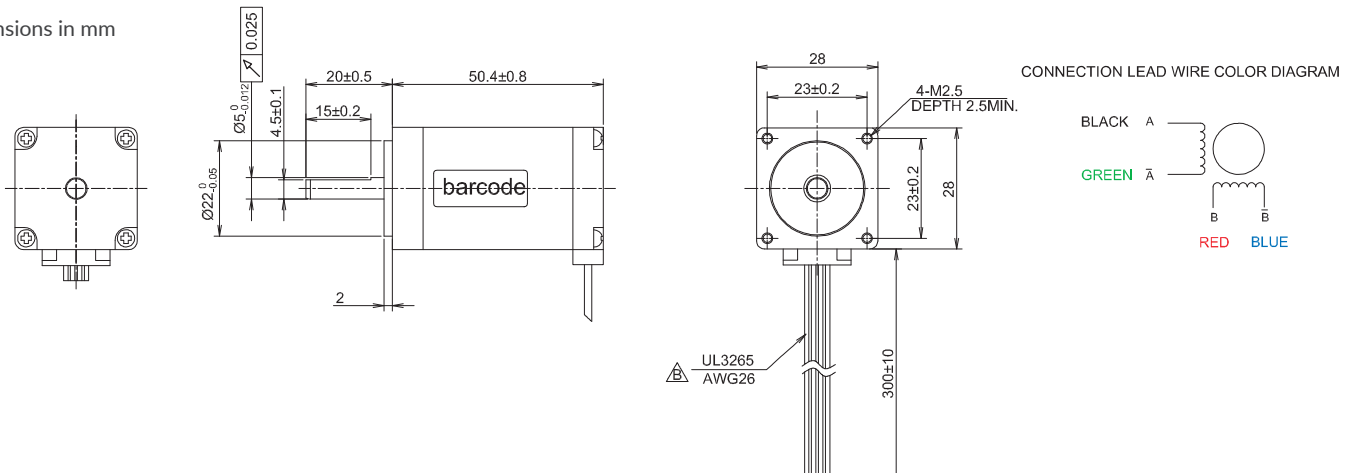



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 20 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40



## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features


Connectors on board and at the lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.85 V	1.50 A/ph	1.90 ohm	2.10 mH	0.17 Nm	20 g.cm <sup>2</sup>	200 g.	4

## Mechanical drawing

Dimensions in mm

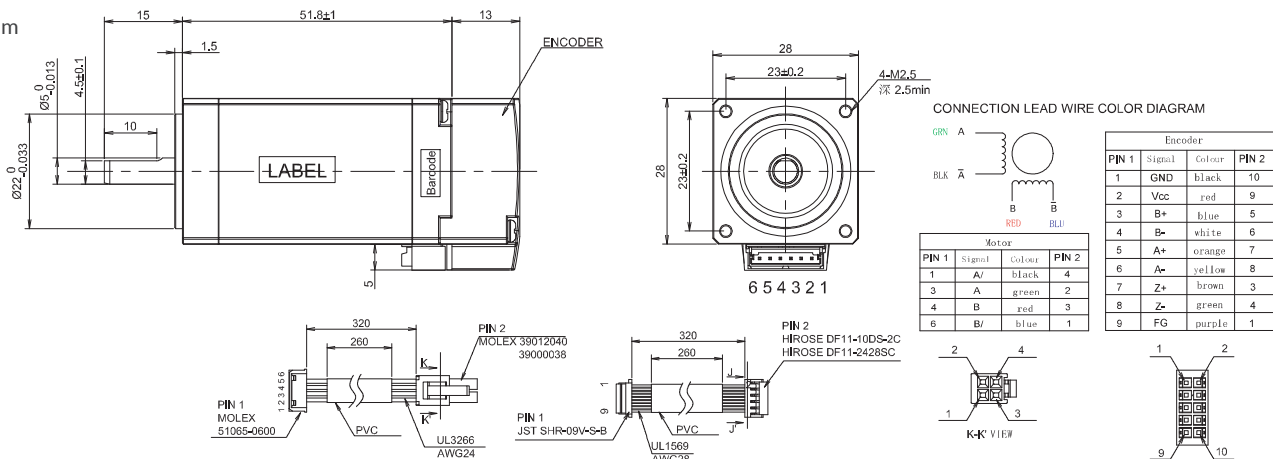



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 20 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40



## Other features

Connector on board

## Optional


CBL/0096-030: JST femal connector and 30 cm. cable for motor connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
1.61 V	2.30 A/ph	0.70 ohm	0.72 mH	0.16 Nm	20.00 g.cm <sup>2</sup>	210 g.	4

## Mechanical drawing

Dimensions in mm

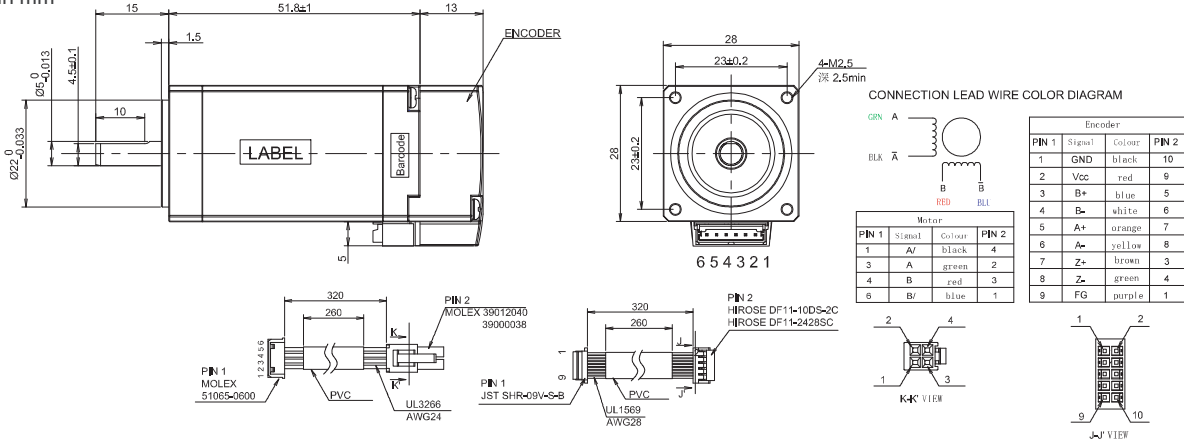



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 15 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40




## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.48 V	0.70 A/ph	6.40 ohm	7.80 mH	0.27 Nm	55.00 g.cm <sup>2</sup>	450 g.	4

## Mechanical drawing

Dimensions in mm

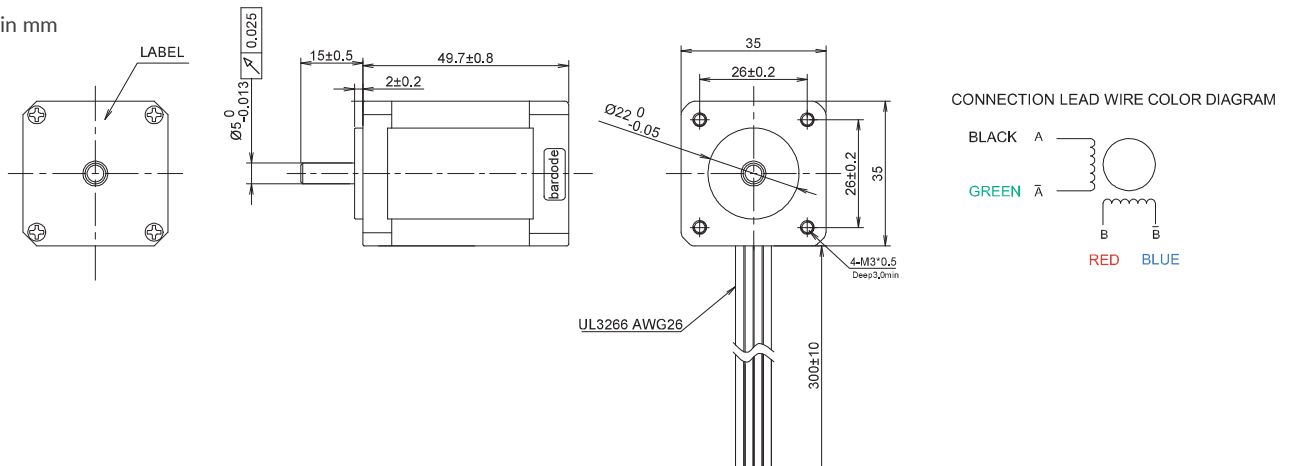



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	B, 130°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	80K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	500 Vac, 1 minute
<b>Max shaft radial load</b>	21 N at 24 mm from front flange
<b>Max shaft axial load</b>	10 N
<b>Protection IP</b>	IP 40



## Other features


Connector on board with cable

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.40 V	0.80 A/ph	3.00 ohm	4.70 mH	0.15 Nm	25.00 g.cm <sup>2</sup>	180 g.	4

## Mechanical drawing


Dimensions in mm

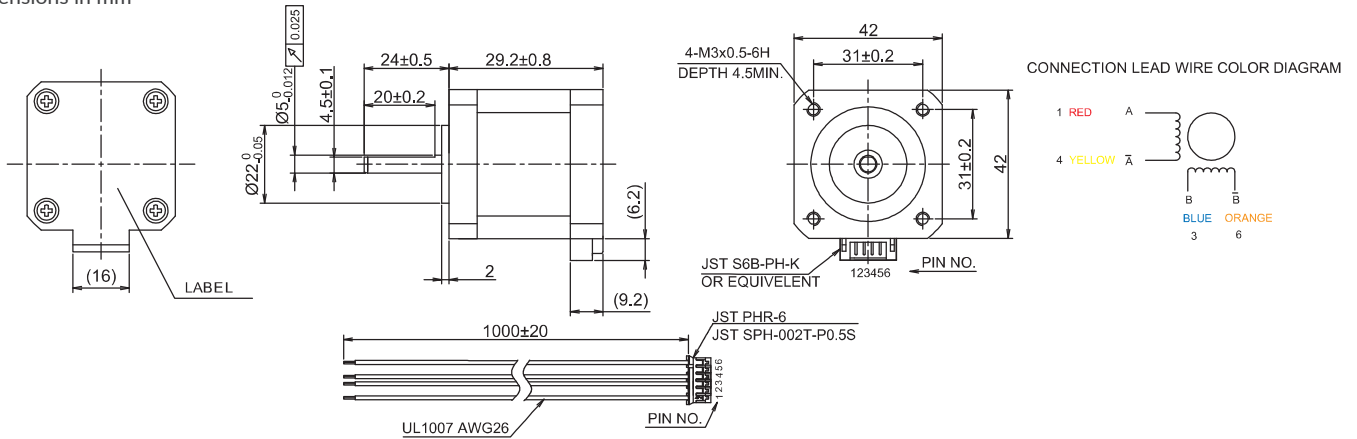



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 24 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40

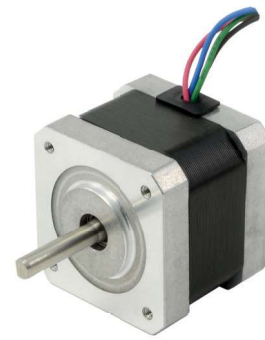


## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.23 V	1.70 A/ph	1.90 ohm	2.80 mH	0.41 Nm	57.00 g.cm <sup>2</sup>	270 g.	4

## Mechanical drawing


Dimensions in mm

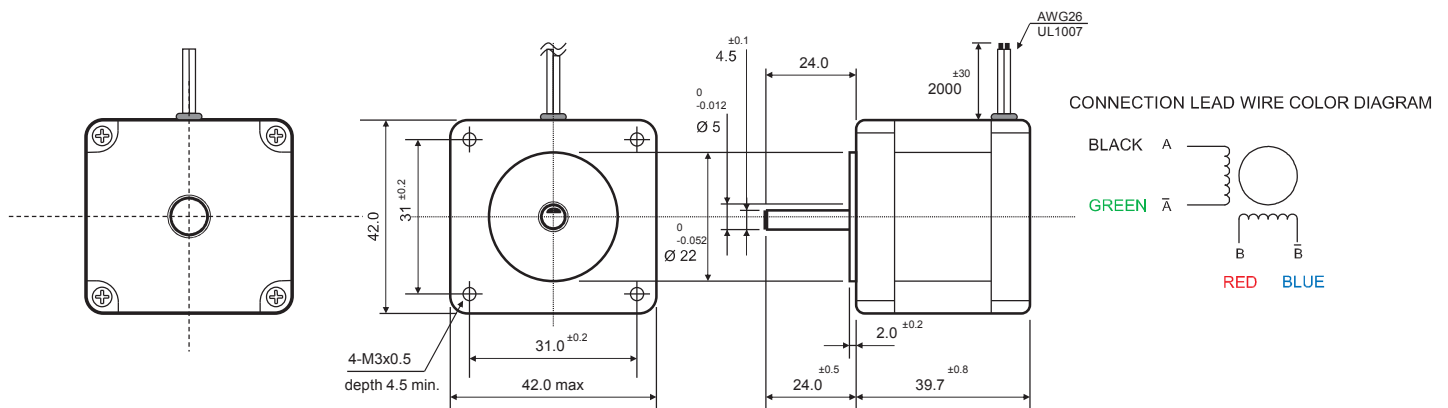



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 24 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40

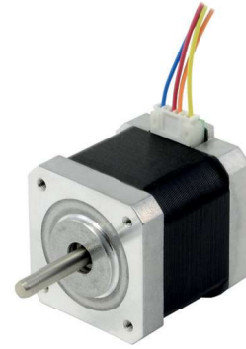

## Other features


Connector on board

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.30 V	1.00 A/ph	4.30 ohm	10.00 mH	0.50 Nm	77.00 g.cm <sup>2</sup>	310 g.	4

## Mechanical drawing

Dimensions in mm

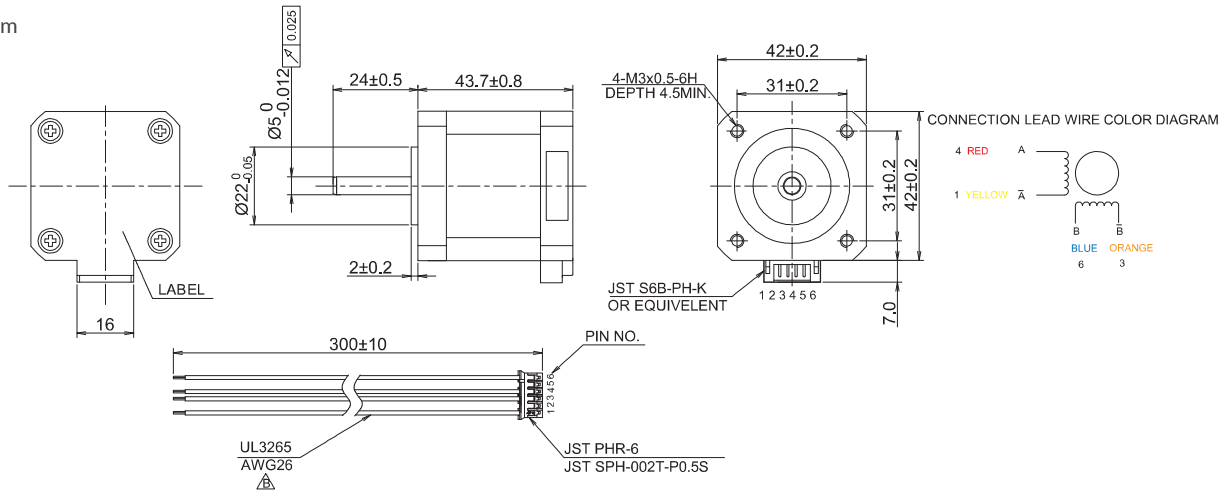





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 20 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40



## Other features


Brake	Power supply 24 Vdc Braking force 0.3 Nm
-------	---------------------------------------------

## Specification


Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
5.10 V	1.70 A/ph	3.00 ohm	7.20 mH	0.45 Nm	69.00 g.cm <sup>2</sup>	310 g.	4

## Mechanical drawing


Dimensions in mm

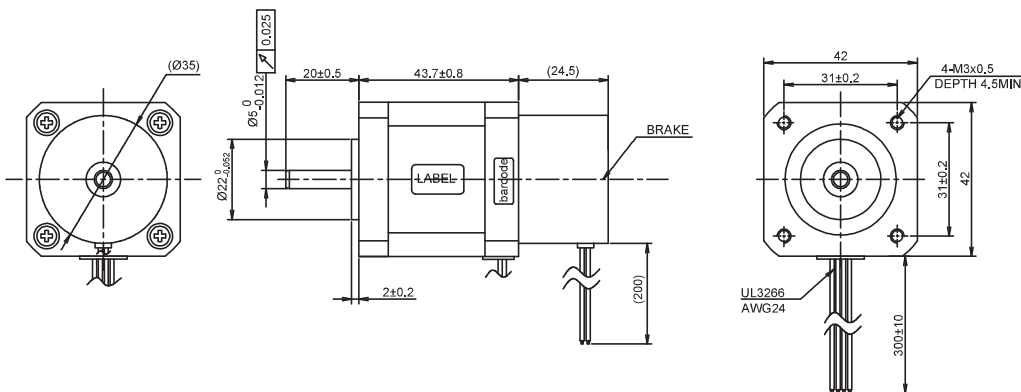

### CONNECTION LEAD WIRE COLOR DIAGRAM



### BRAKE CONNECTION





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 24 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 65



- IP65 Protection
- Multiturn Absolute Encoder

## Encoder features

Type	Absolute multiturn
Power supply	5.00 Vdc
Single turn resolution	17 bits
Multiturn resolution	16 bits
Output type	BiSS-C

## Other features

Connectors on board

## Optional



CBCP-00072: M12 5 poles female connector and 2.5 mt. cable for motor connection  
CBCP-00071: M12 8 poles female connector and 2.5 mt. cable for encoder connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.00 V	2.00 A/ph	1.00 ohm	2.00 mH	0.48 Nm	80.00 g.cm <sup>2</sup>	560 g.	4

## Mechanical drawing

Dimensions in mm

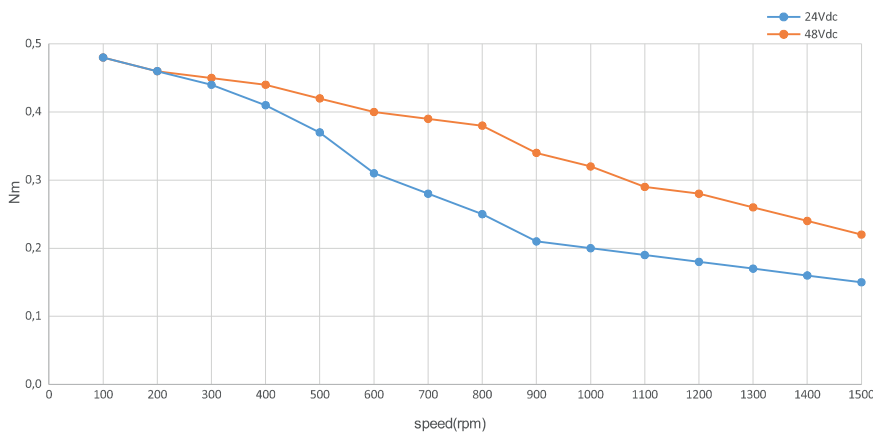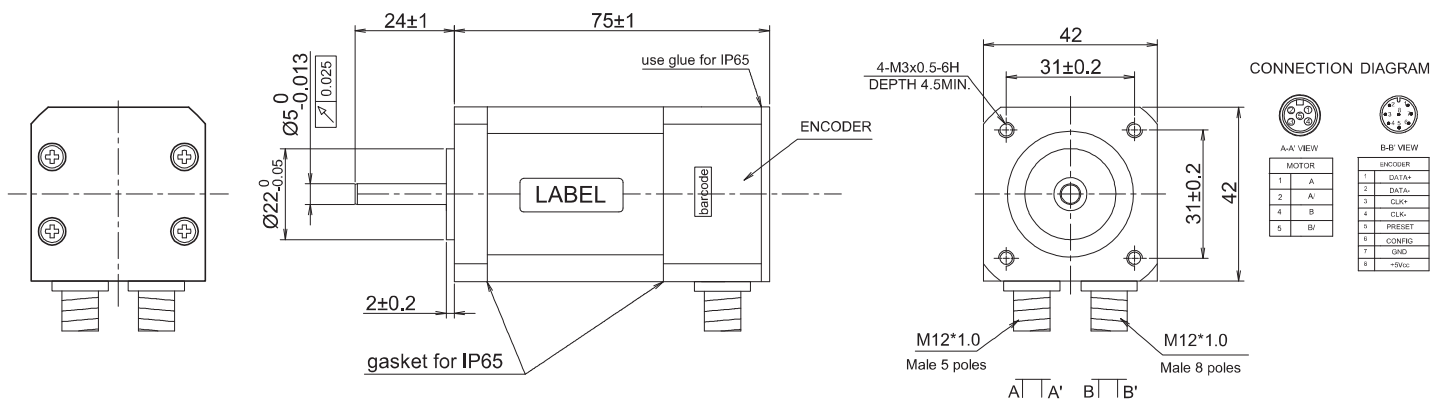


## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 2.0 A/ph  
Half step



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 24 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40



Incremental Encoder

## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features


Connectors at lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.70 V	2.00 A/ph	1.35 ohm	2.80 mH	0.48 Nm	77.00 g.cm <sup>2</sup>	360 g.	4

## Mechanical drawing


Dimensions in mm

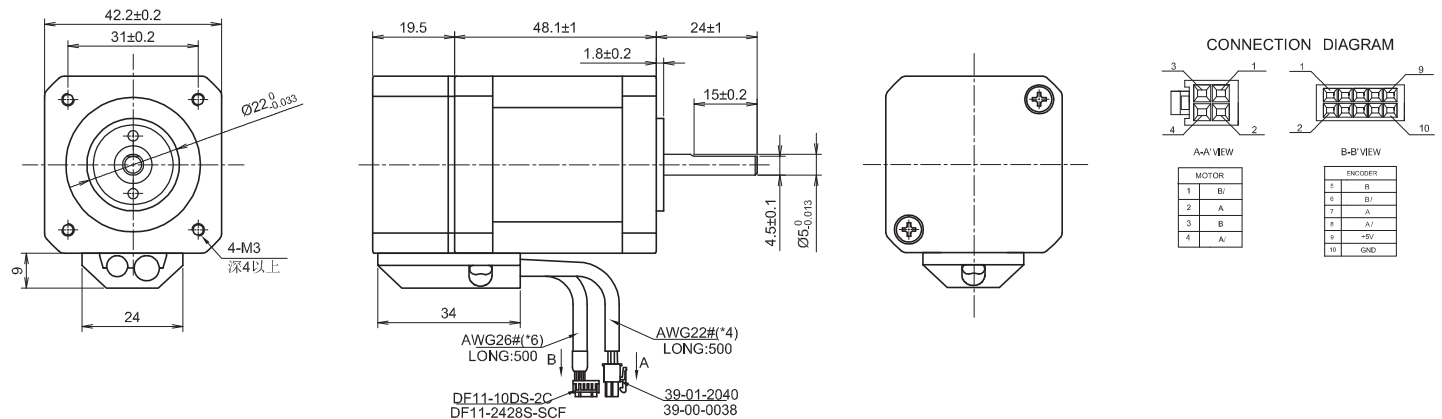



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	B, 130°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	80K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	500 Vac, 1 minute
<b>Max shaft radial load</b>	21 N at 24 mm from front flange
<b>Max shaft axial load</b>	10 N
<b>Protection IP</b>	IP 40



## Encoder features

<b>Type</b>	Incremental quadrature
<b>Power supply</b>	5.00 Vdc
<b>Resolution</b>	1000 ppr
<b>Output type</b>	Line driver

## Other features


<b>Brake</b>	Power supply 24 Vdc Braking force 0.5 Nm
<b>Connectors at lead wires end</b>	

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.70 V	2.00 A/ph	1.35 ohm	2.80 mH	0.48 Nm	77.00 g.cm <sup>2</sup>	390 g.	4

## Mechanical drawing


Dimensions in mm

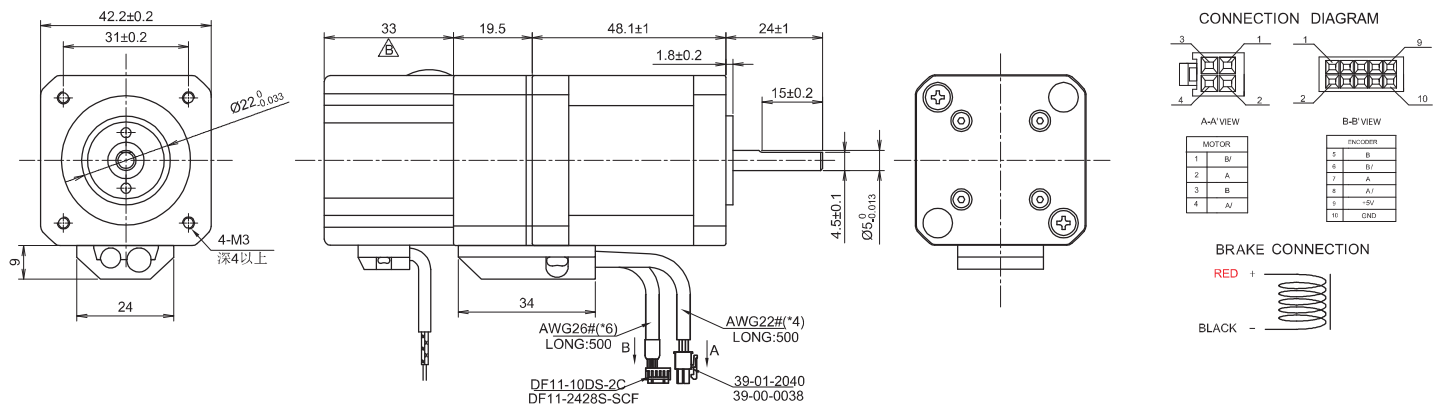



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 24 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 65 (except the front shaft)



## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features

Connectors on board

## Optional


CBCP-00072: M12 5 poles femal connector and 2.5 mt. cable for motor connection  
CBCP-00071: M12 8 poles femal connector and 2.5 mt. cable for encoder connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.60 V	1.80 A/ph	2.00 ohm	5.00 mH	0.72 Nm	115.00 g.cm <sup>2</sup>	700 g.	4


## Mechanical drawing

Dimensions in mm

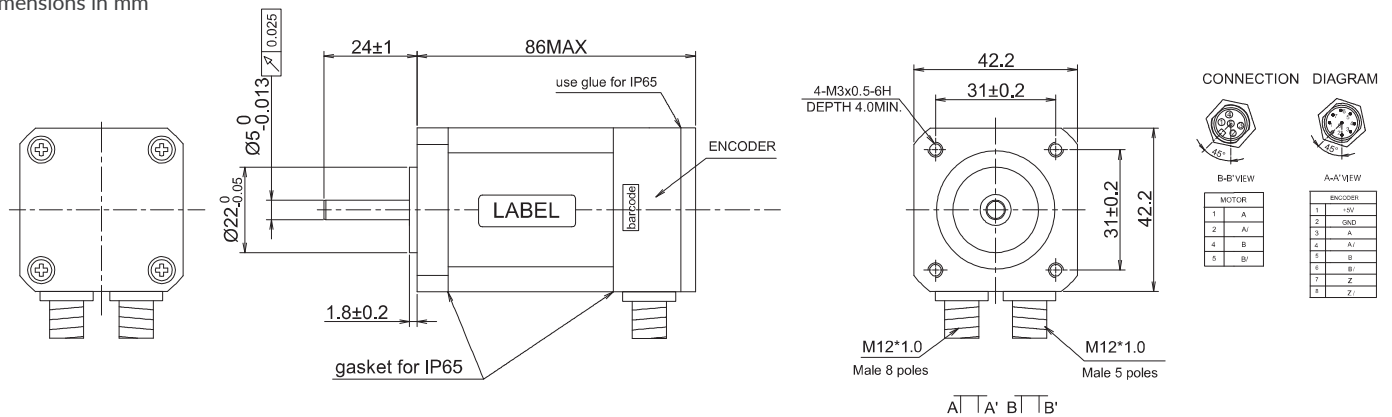

## Torque diagram


Drive conditions:  
Voltage 24 Vdc  
Current 1.8 A/ph  
Half step

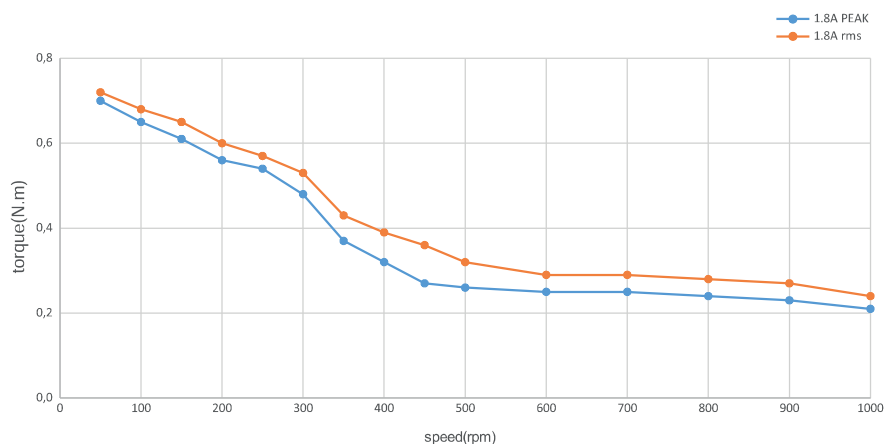



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 24 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40



Incremental Encoder

## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features


Connectors at lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.50 V	2.00 A/ph	1.75 ohm	4.00 mH	0.72 Nm	110.00 g.cm <sup>2</sup>	500 g.	4

## Mechanical drawing


Dimensions in mm

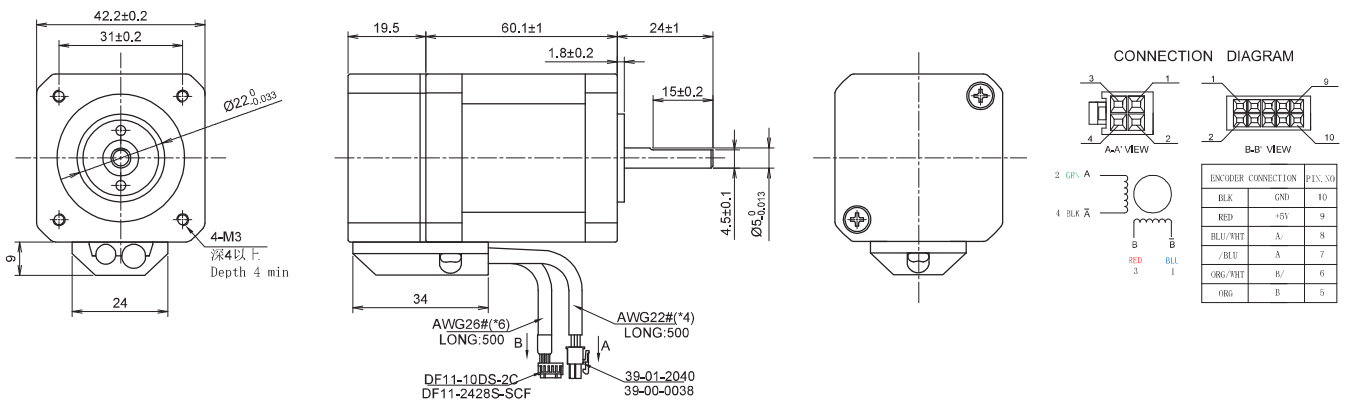



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	21 N at 24 mm from front flange
Max shaft axial load	10 N
Protection IP	IP 40

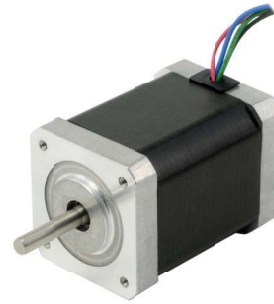


## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.36 V	2.80 A/ph	1.20 ohm	2.10 mH	0.86 Nm	115.00 g.cm <sup>2</sup>	600 g.	4


## Mechanical drawing

Dimensions in mm

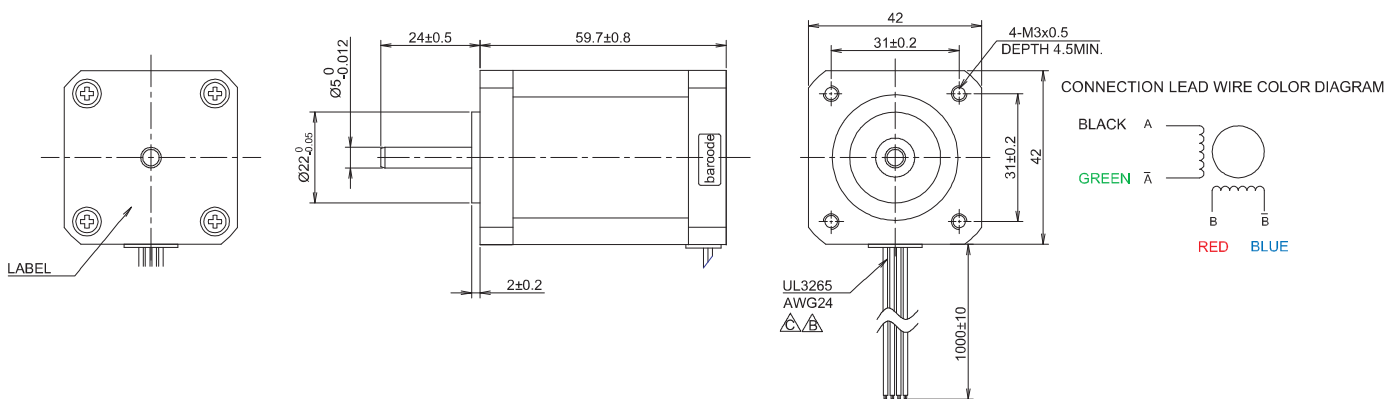

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 2.8 A/ph  
Half step

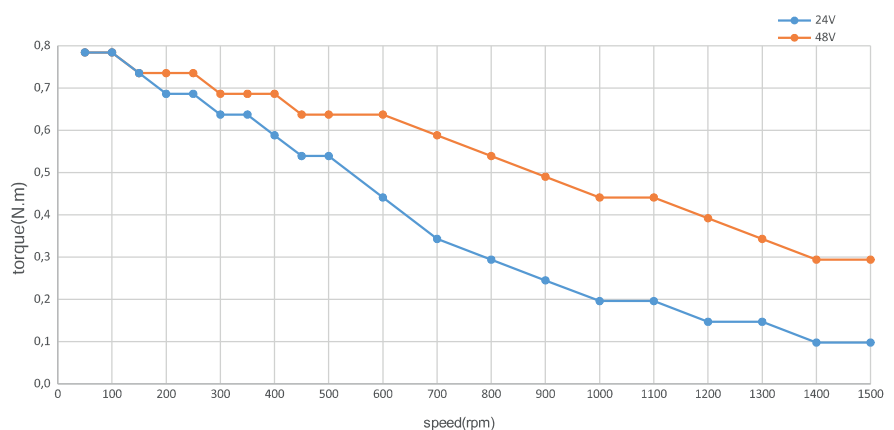








## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Other features


Connector on board

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.60 V	2.00 A/ph	1.20 ohm	2.30 mH	0.72 Nm	180.00 g.cm <sup>2</sup>	700 g.	4


## Mechanical drawing

Dimensions in mm

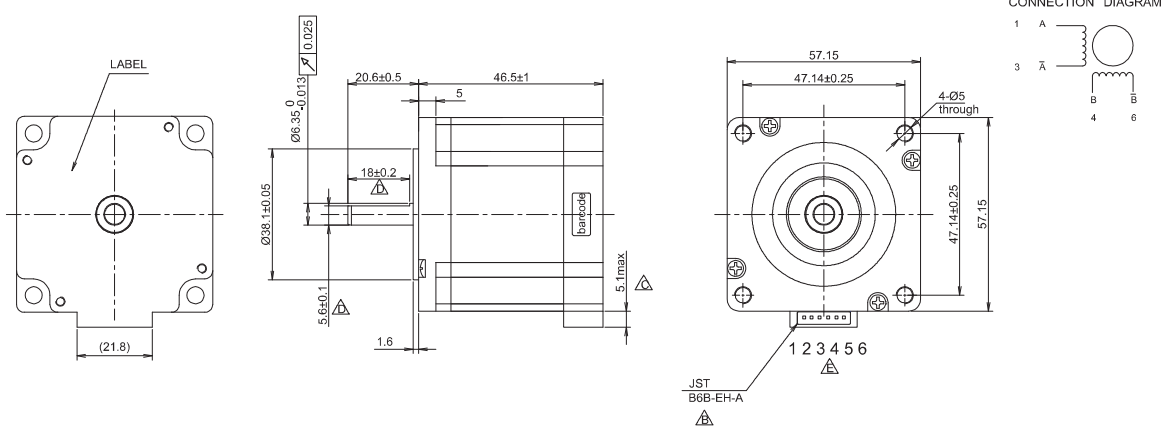

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 2.0 A/ph  
Half step

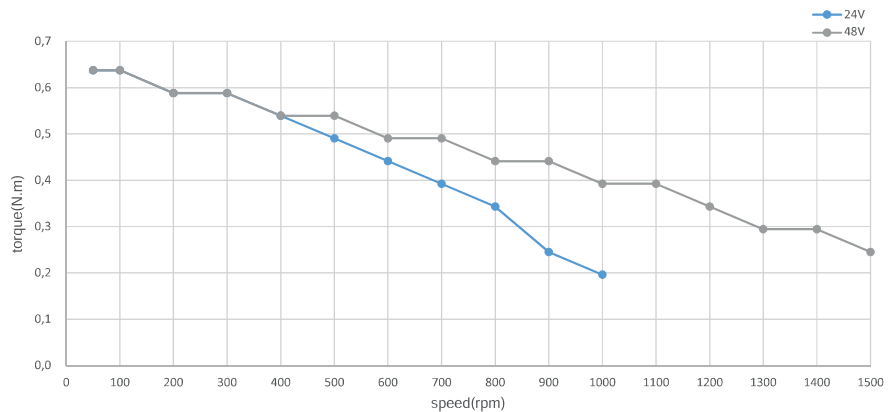



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Other features



Brake	Power supply 24 Vdc Braking force 1.0 Nm
Connector on board	

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.35 V	1.50 A/ph	2.90 ohm	9.20 mH	1.00 Nm	290.00 g.cm <sup>2</sup>	700 g.	4

## Mechanical drawing

Dimensions in mm

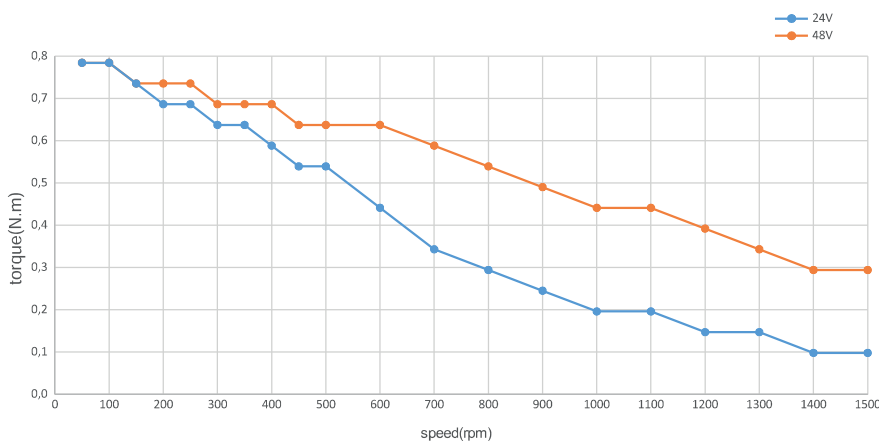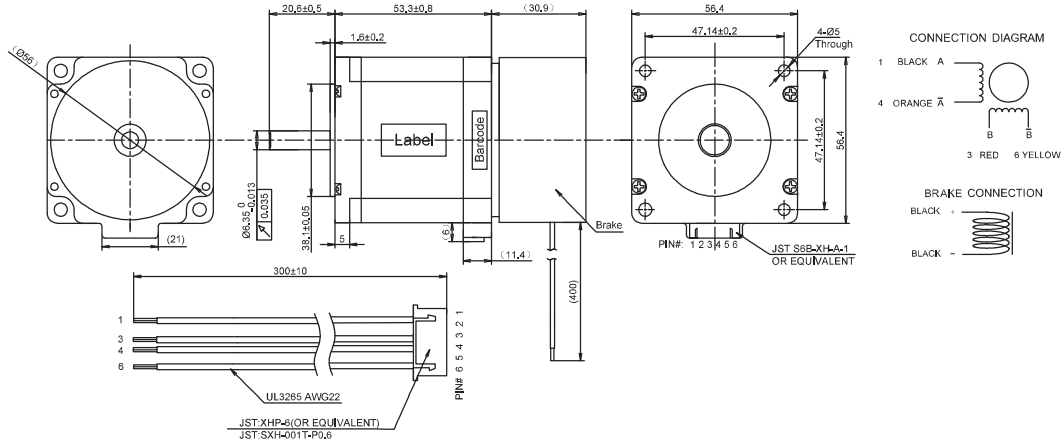

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 1.5 A/ph  
Half step



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Other features


Connector on board with cable

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.36 V	1.50 A/ph	3.40 ohm	9.20 mH	1.00 Nm	286.00 g.cm <sup>2</sup>	750 g.	4


## Mechanical drawing

Dimensions in mm

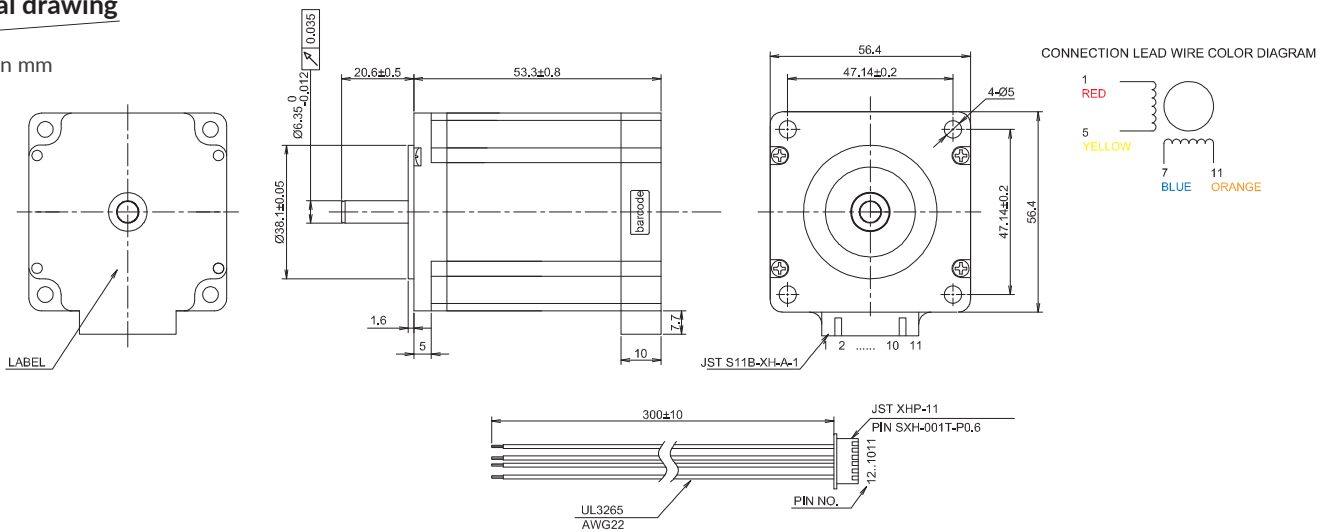

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 1.5 A/ph  
Half step

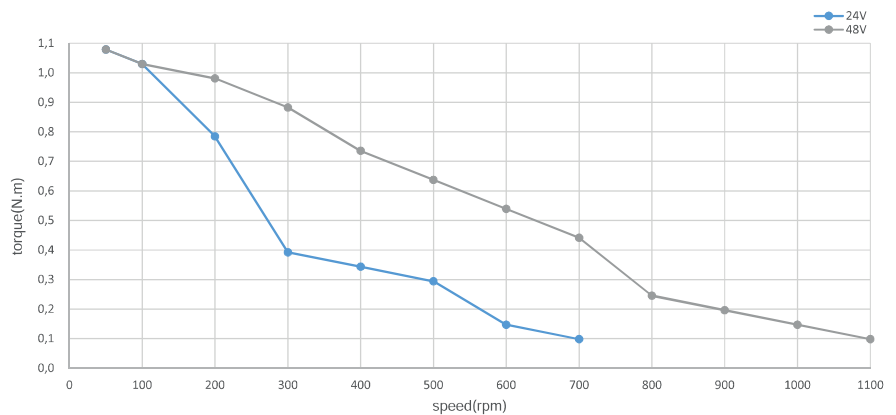





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Other features


Connector on board

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
1.68 V	4.20 A/ph	0.40 ohm	1.30 mH	1.15 Nm	280.00 g.cm <sup>2</sup>	720 g.	4


## Mechanical drawing

Dimensions in mm

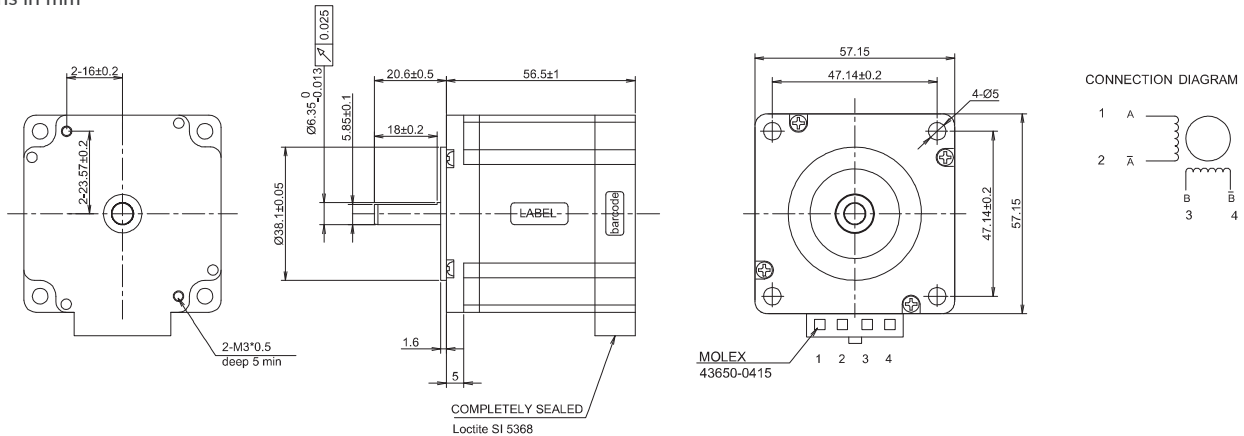

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 4.2 A/ph  
Half step

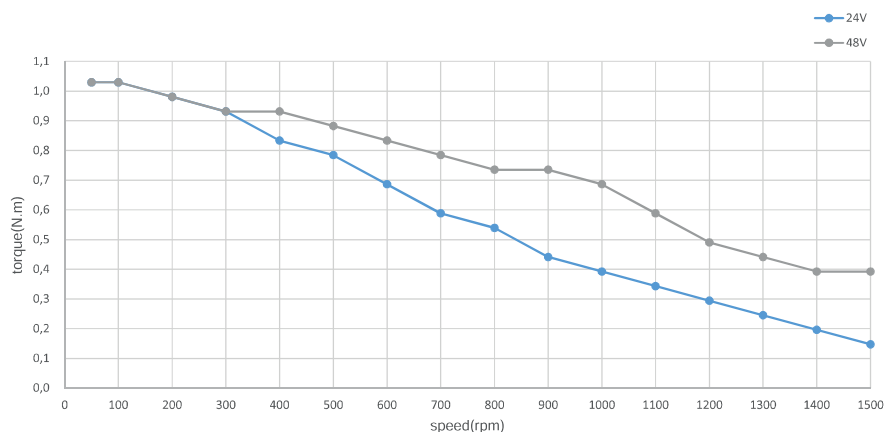



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 65



## Other features

Connector on board

## Optional



CBCP-00072: M12 5 poles femal connector and 2.5 mt. cable for motor connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.35 V	4.20 A/ph	0.40 ohm	1.20 mH	1.20 Nm	300.00 g.cm <sup>2</sup>	700 g.	4

## Mechanical drawing

Dimensions in mm

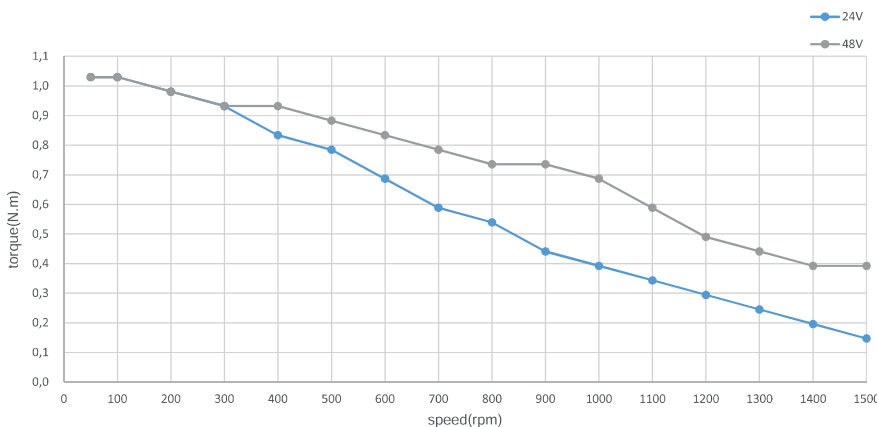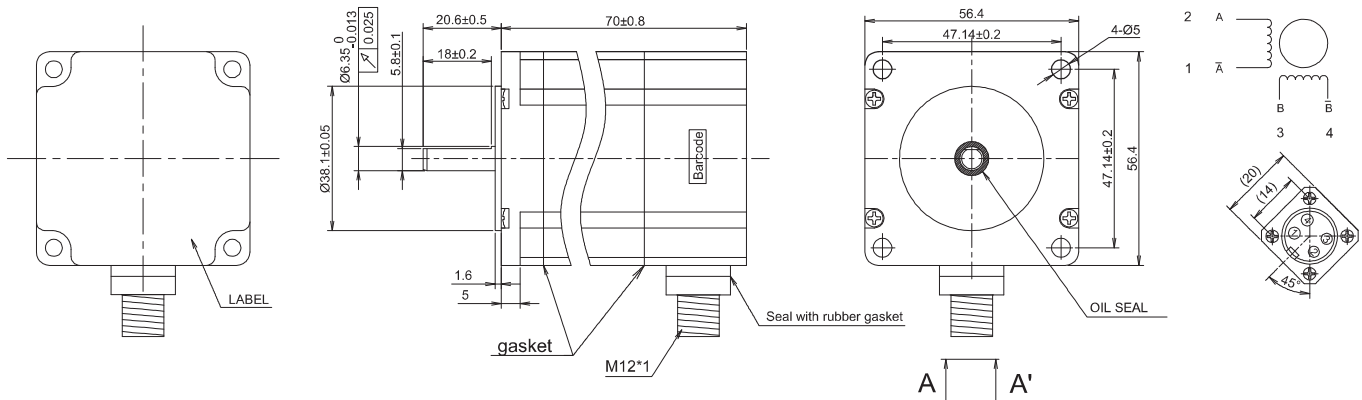

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 4.2 A/ph  
Half step



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Other features


Connector on board

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.91 V	3.00 A/ph	0.97 ohm	3.10 mH	1.70 Nm	516.00 g.cm <sup>2</sup>	1000 g.	4

## Mechanical drawing


Dimensions in mm

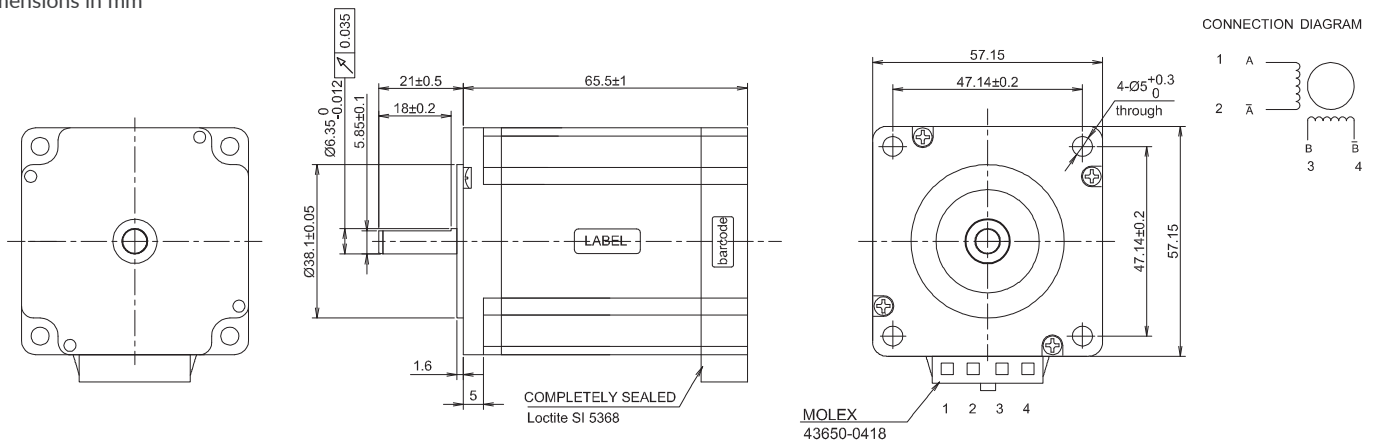



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 65



## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	500 ppr
Output type	Line driver

## Other features

Connectors on board

### Optional

CBCP-00072: M12 5 poles femal connector and 2.5 mt. cable for motor connection



CBCP-00071: M12 8 poles femal connector and 2.5 mt. cable for encoder connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.12 V	2.82 A/ph	1.10 ohm	4.40 mH	1.95 Nm	520.00 g.cm <sup>2</sup>	1000 g.	4

## Mechanical drawing

Dimensions in mm

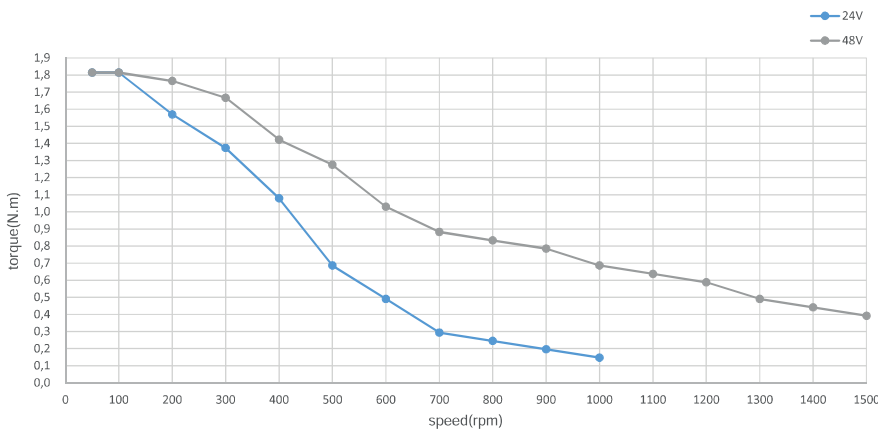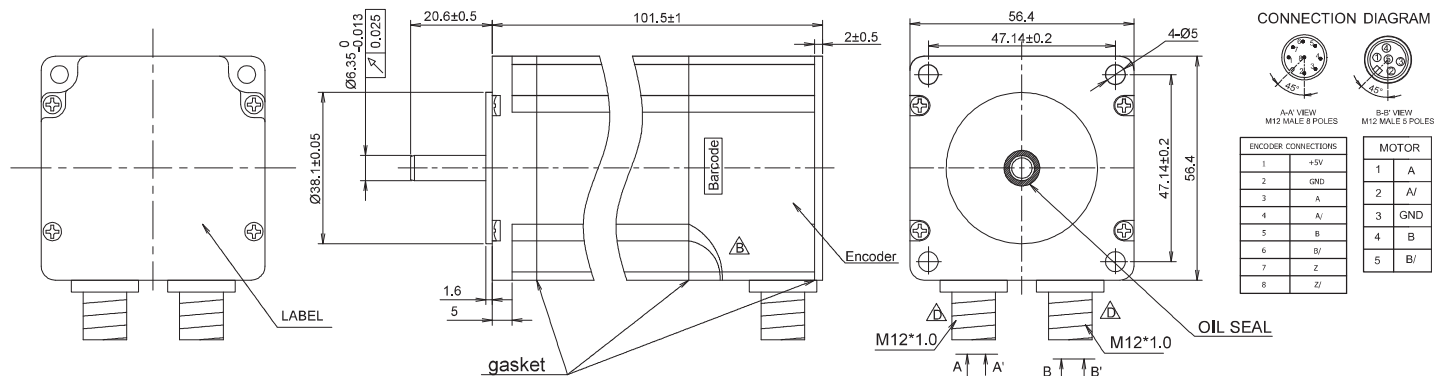

## Torque diagram


Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 2.8 A/ph  
Half step





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 65



## Encoder features

Type	Absolute multiturn
Power supply	5.00 Vdc
Single turn resolution	17 bits
Multiturn resolution	16 bits
Output type	BiSS-C

## Other features

Connectors on board

## Optional

CBCP-00065: M16 6 poles femal connector and 16 mt. cable for motor and brake connection


CBCP-00064: M12 8 poles femal connector and 16 mt. cable for encoder connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.10 V	4.20 A/ph	0.50 ohm	1.77 mH	2.00 Nm	520.00 g.cm <sup>2</sup>	2000 g.	4


## Mechanical drawing

Dimensions in mm

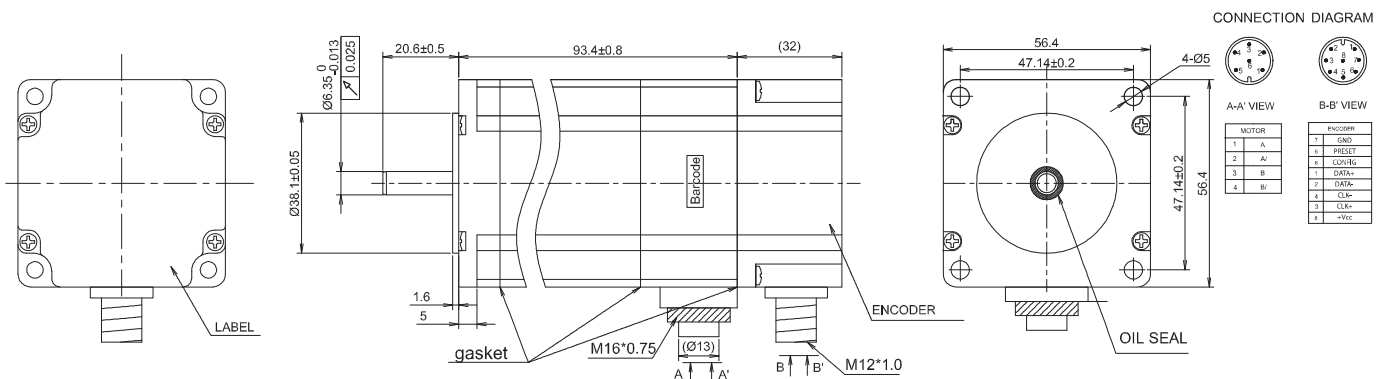

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 4.2 A/ph  
Half step

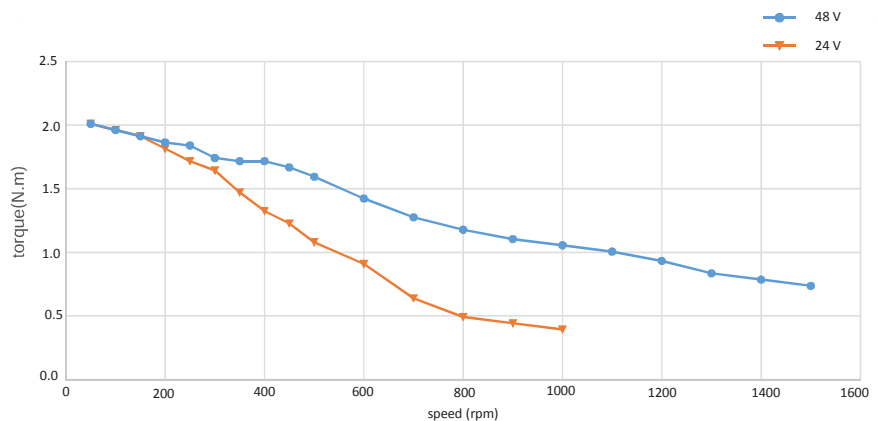



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 20 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 65



## Other features

Connector on board

## Optional


CBCP-00072: M12 5 poles femal connector and 2.5 mt. cable for motor connection

## Specification


Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.10 V	4.20 A/ph	0.50 ohm	1.80 mH	2.20 Nm	516.00 g.cm <sup>2</sup>	1000 g.	4

## Mechanical drawing

Dimensions in mm

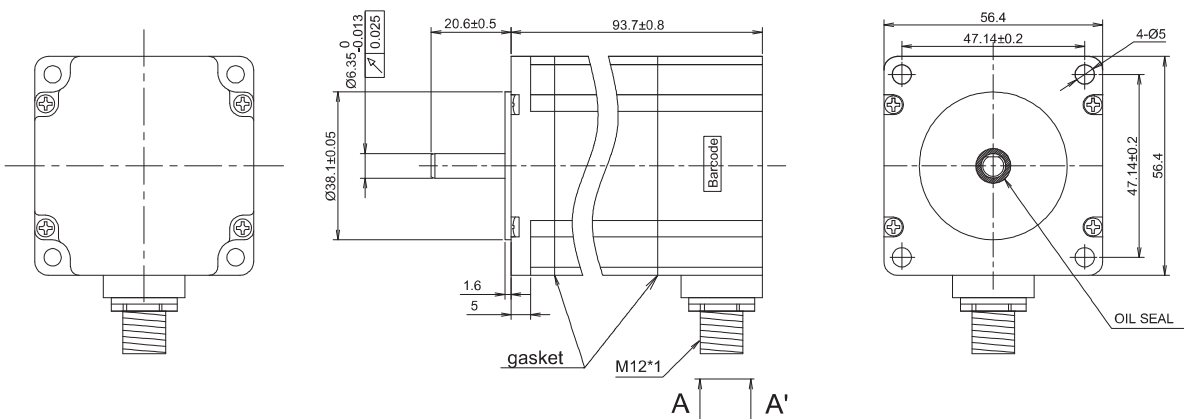


## CONNECTION DIAGRAM





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 21 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features





Encoder connector at lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.00 V	5.00 A/ph	0.40 ohm	1.70 mH	2.00 Nm	520.00 g.cm <sup>2</sup>	1300 g.	4


## Mechanical drawing

Dimensions in mm

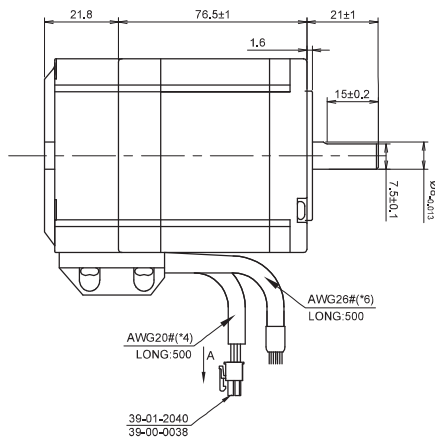

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 5.0 A/ph  
Half step

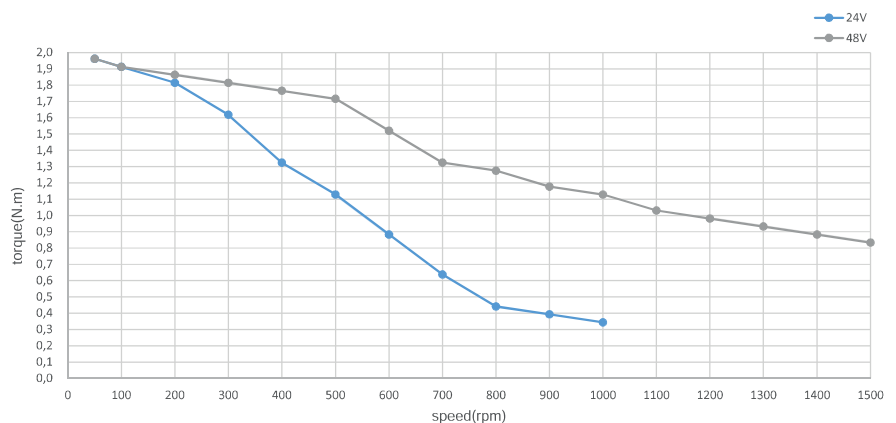



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	B, 130°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	80K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	500 Vac, 1 minute
<b>Max shaft radial load</b>	75 N at 21 mm from front flange
<b>Max shaft axial load</b>	15 N
<b>Protection IP</b>	IP 40



Brake

## Other features


<b>Brake</b>	Power supply 24 Vdc Braking force 2.0 Nm
--------------	---------------------------------------------

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.00 V	5.00 A/ph	0.40 ohm	1.80 mH	2.00 Nm	480.00 g.cm <sup>2</sup>	1000 g.	4

## Mechanical drawing

Dimensions in mm

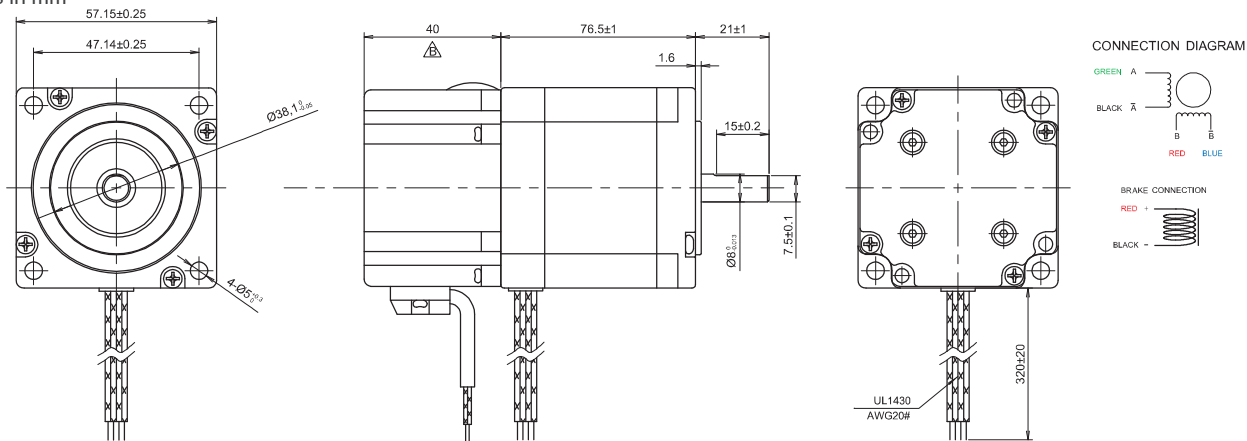




## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 21 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



Brake



Incremental Encoder

## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features


Brake	Power supply 24 Vdc Braking force 2.0 Nm
Connectors at lead wires end	

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
1.90 V	5.00 A/ph	0.38 ohm	1.70 mH	2.00 Nm	480.00 g.cm <sup>2</sup>	1000 g.	4


## Mechanical drawing

Dimensions in mm

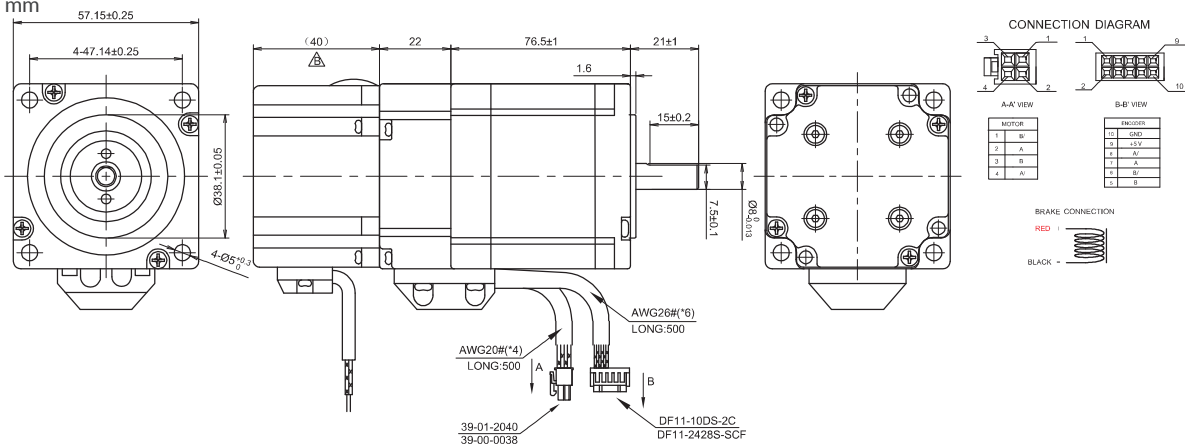

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 5.0 A/ph  
Half step

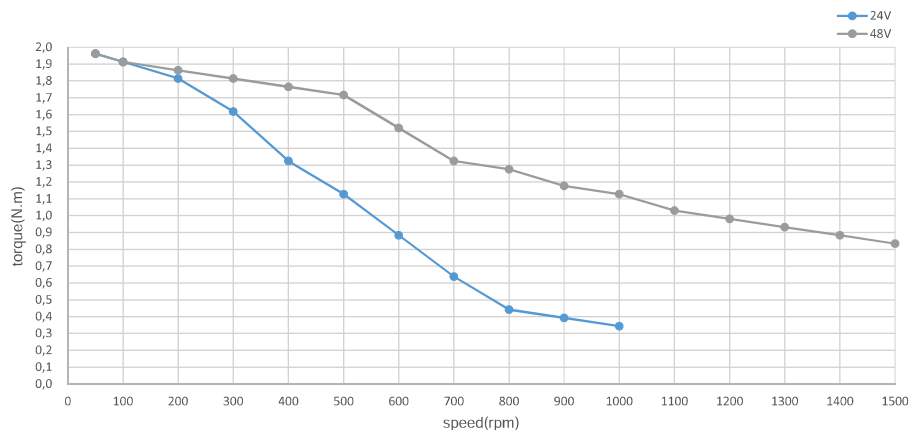



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 21 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40





## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.30 V	5.00 A/ph	0.46 ohm	1.83 mH	2.20 Nm	600.00 g.cm <sup>2</sup>	1300 g.	4

## Mechanical drawing

Dimensions in mm

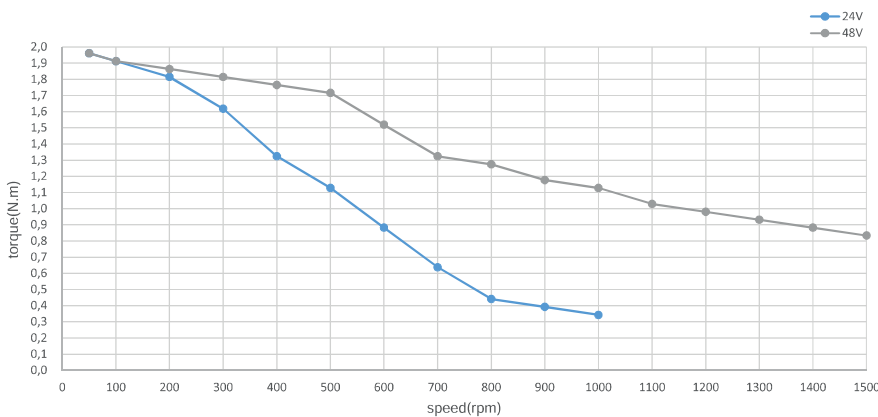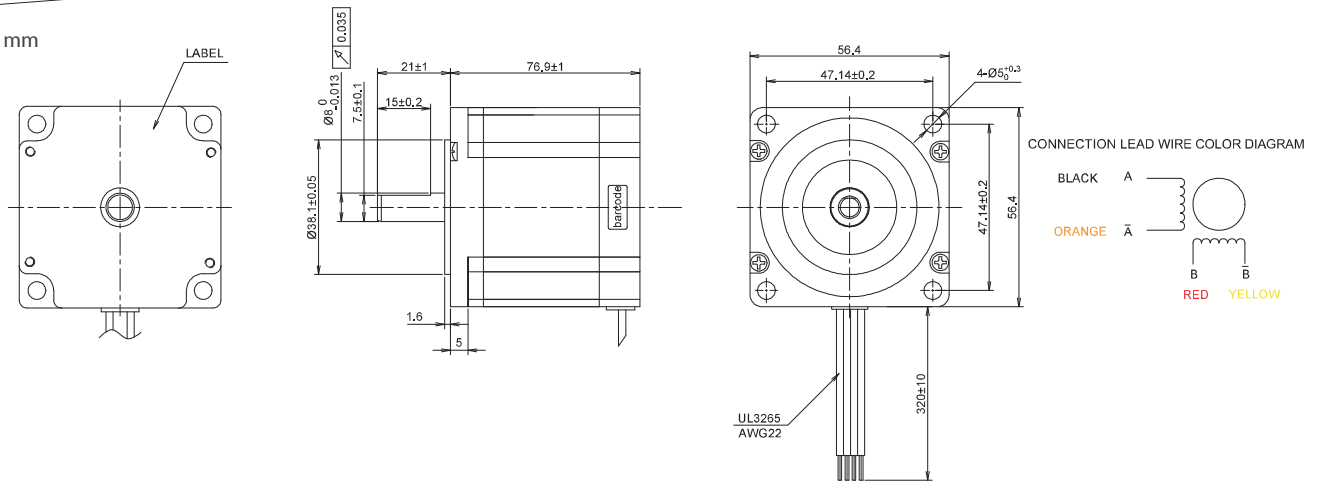

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 5.0 A/ph  
Half step





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 24 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40





## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.12 V	2.80 A/ph	1.20 ohm	4.00 mH	1.60 Nm	450.00 g.cm <sup>2</sup>	550 g.	4

## Mechanical drawing

Dimensions in mm

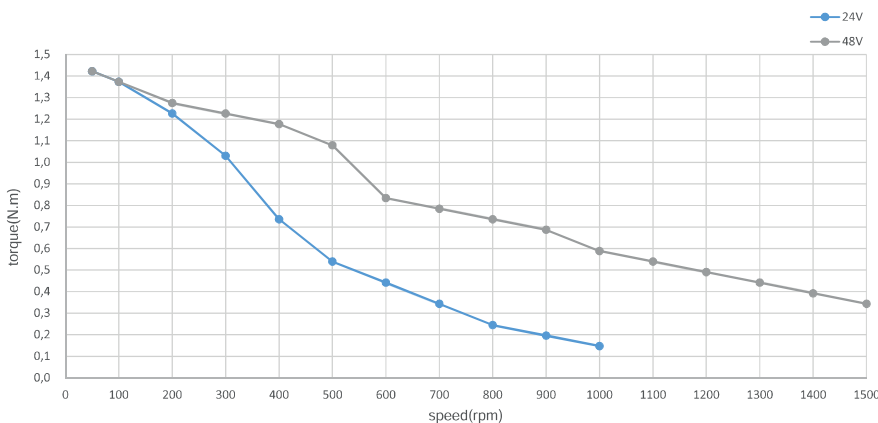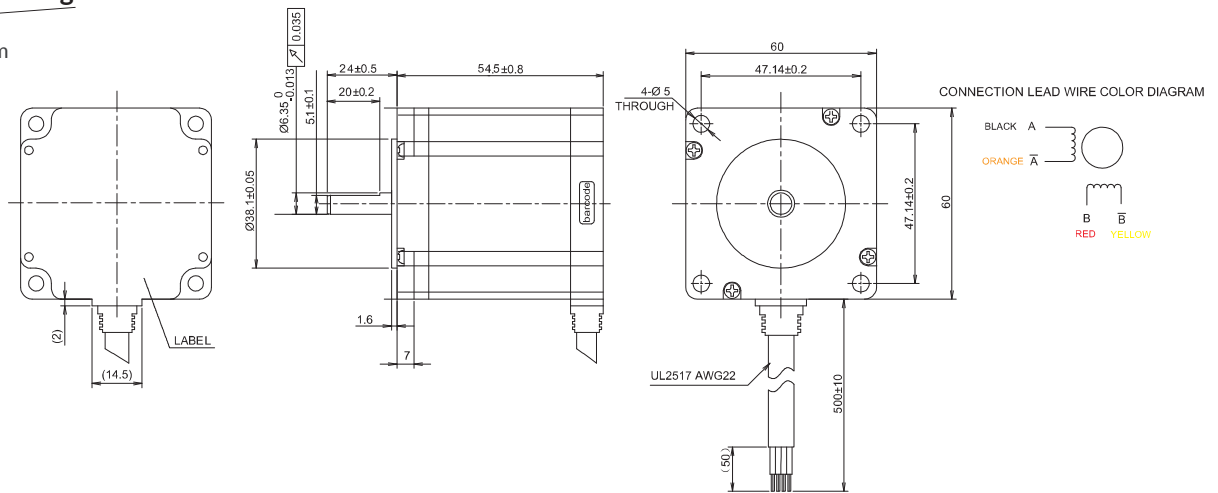

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 2.8 A/ph  
Half step





## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 24 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Other features


- UL certification
- Connector at lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.90 V	3.00 A/ph	1.30 ohm	5.10 mH	3.00 Nm	922 g.cm <sup>2</sup>	1800 g.	4


## Mechanical drawing

Dimensions in mm

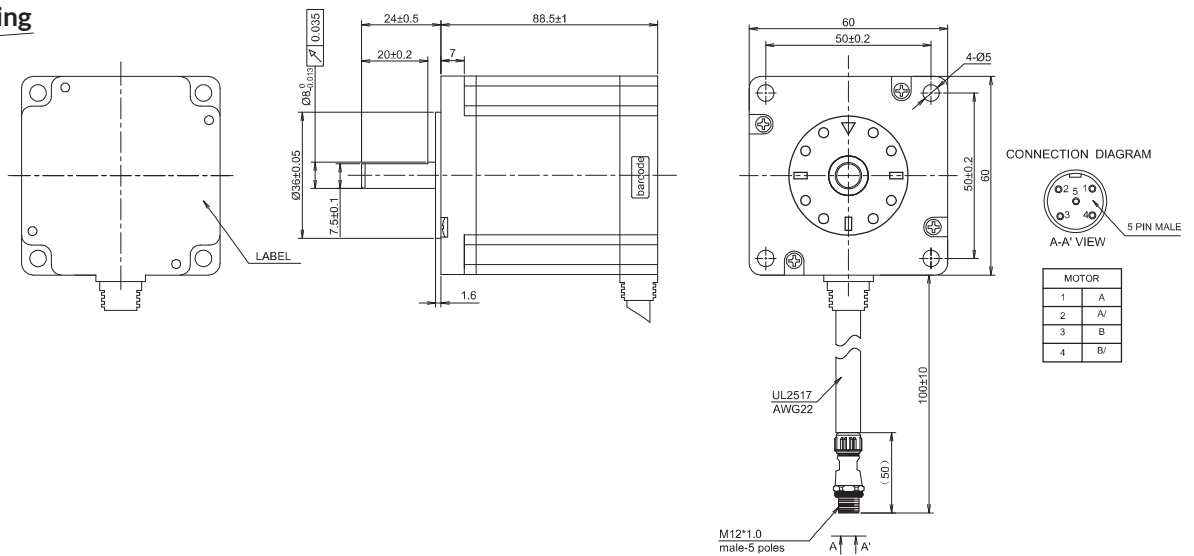

## Torque diagram

Drive conditions:  
Voltage 24 Vdc  
Current 3.0 A/ph  
Half step

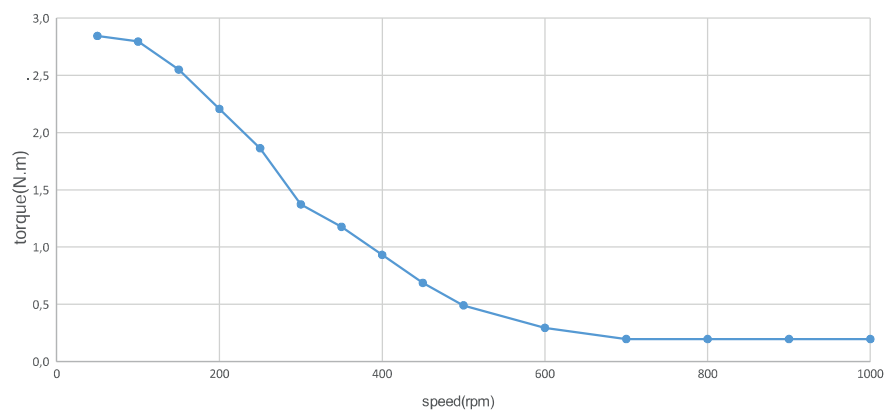



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	B, 130°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	80K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	500 Vac, 1 minute
<b>Max shaft radial load</b>	75 N at 20 mm from front flange
<b>Max shaft axial load</b>	15 N
<b>Protection IP</b>	IP 40





## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.80 V	4.00 A/ph	0.70 ohm	2.40 mH	2.70 Nm	922.00 g.cm <sup>2</sup>	1300 g.	4

## Mechanical drawing

Dimensions in mm

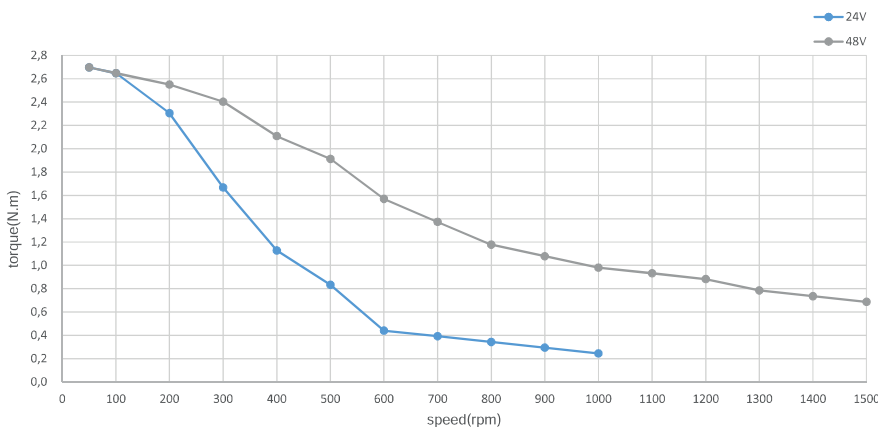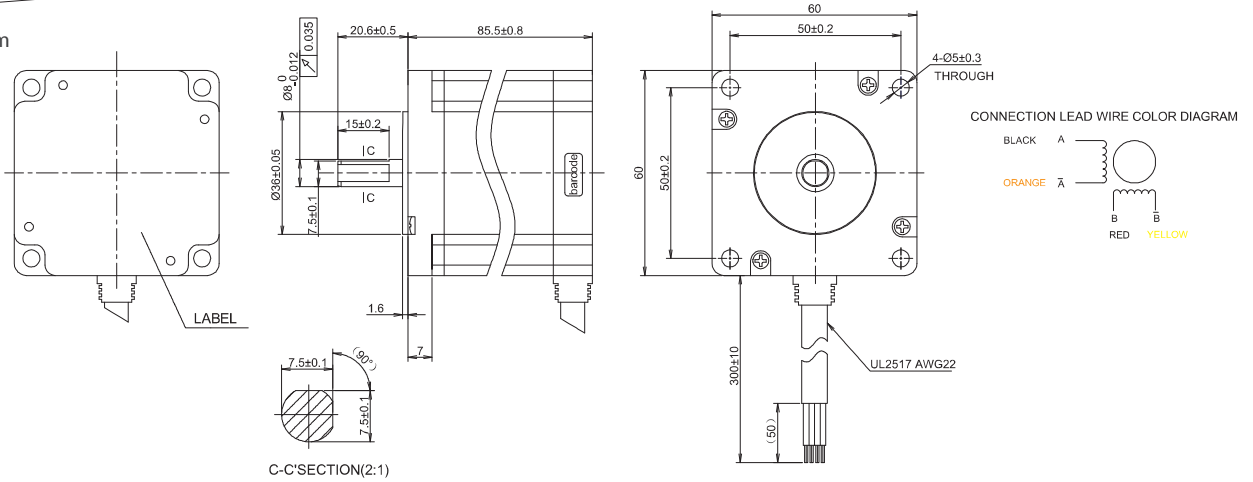


## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 4.0 A/ph  
Half step



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 24 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 65



## Encoder features

Type	Absolute multiturn
Power supply	5.00 Vdc
Single turn resolution	17 bits
Multi turn resolution	16 bits
Output type	Biss-C

## Other features

Connectors on board

## Optional


CBCP-00072: M12 5 poles femal connector and 2.5 mt. cable for motor connection  
CBCP-00071: M12 8 poles femal connector and 2.5 mt. cable for encoder connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.15 V	4.20 A/ph	0.75 ohm	3.00 mH	3.00 Nm	920.00 g.cm <sup>2</sup>	2000 g.	4

## Mechanical drawing


Dimensions in mm

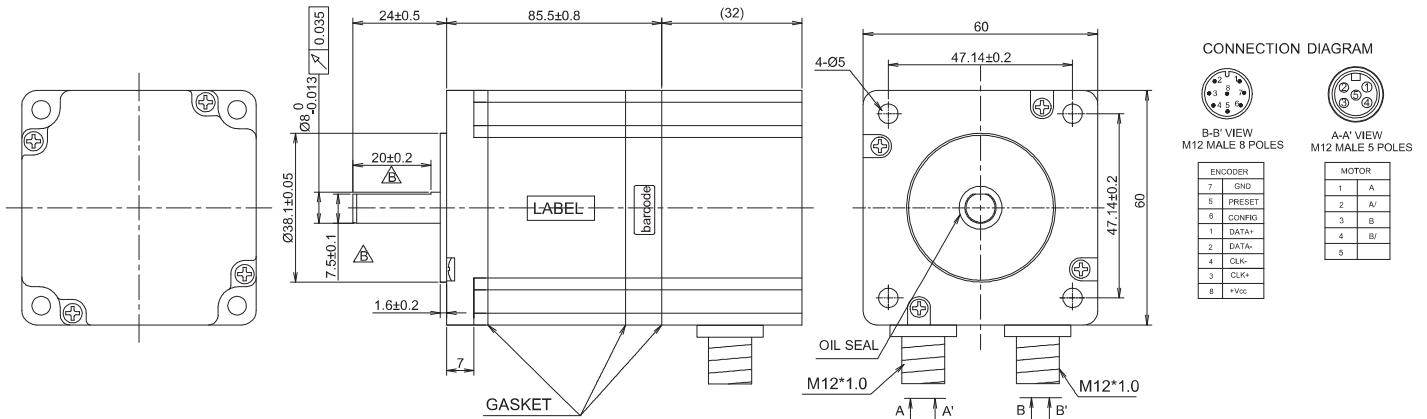



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 21 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line Driver

## Other features



Connectors at lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.25 V	5.00 A/ph	0.45 ohm	1.80 mH	3.00 Nm	900.00 g.cm <sup>2</sup>	1500 g.	4

## Mechanical drawing

Dimensions in mm

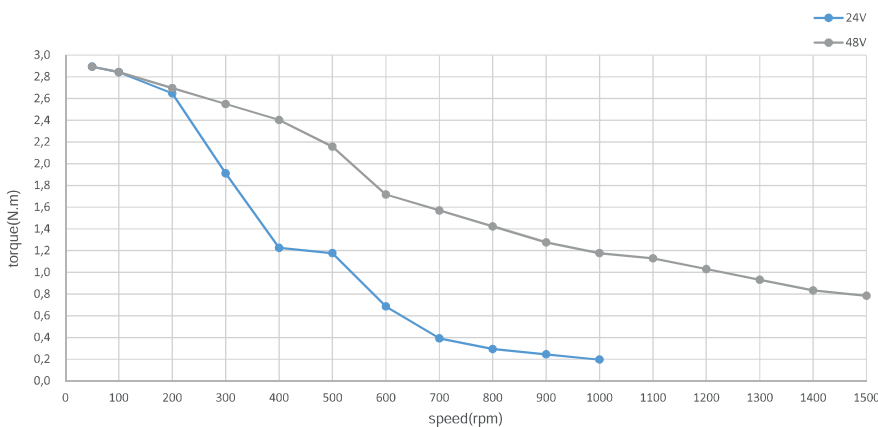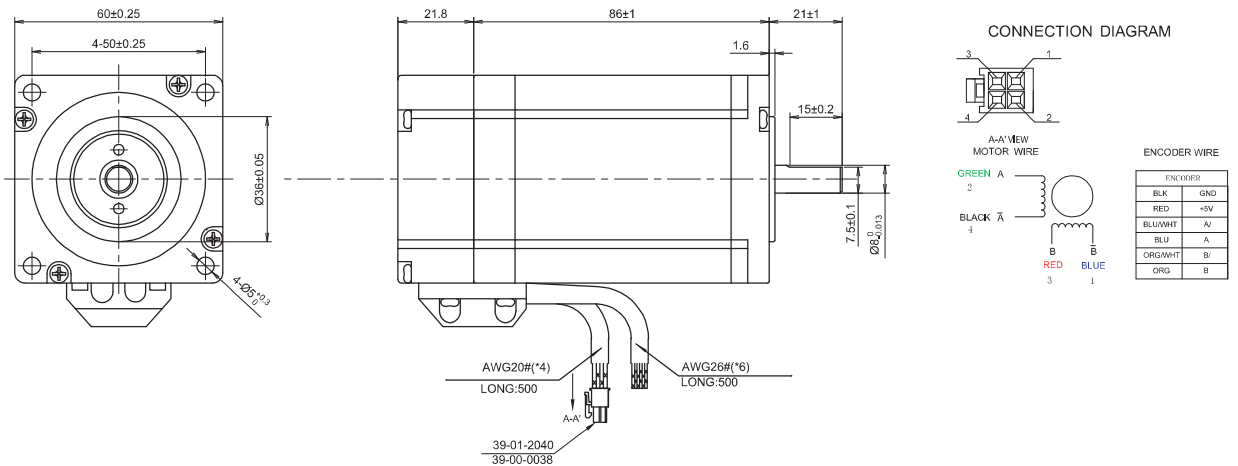

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 5.0 A/ph  
Half step



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	75 N at 21 mm from front flange
Max shaft axial load	15 N
Protection IP	IP 40



Brake



Incremental Encoder

## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line Driver

## Other features


Brake	Power supply 24 Vdc
Connectors at the lead wires end	Braking force 2.0 Nm

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.30 V	5.00 A/ph	0.46 ohm	2.00 mH	3.00 Nm	900.00 g.cm <sup>2</sup>	1500 g.	4


## Mechanical drawing

Dimensions in mm

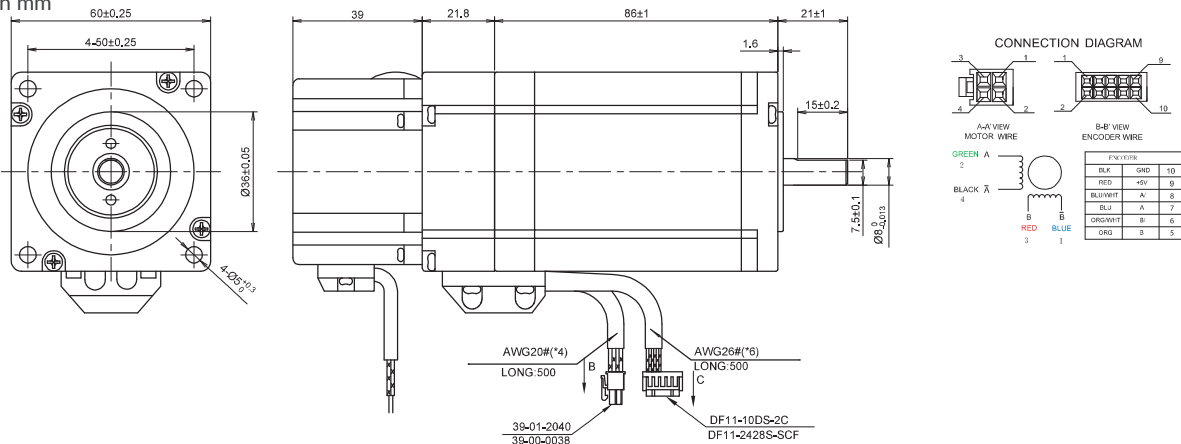

## Torque diagram

Drive conditions:  
Voltage 24 Vdc / 48 Vdc  
Current 5.0 A/ph  
Half step

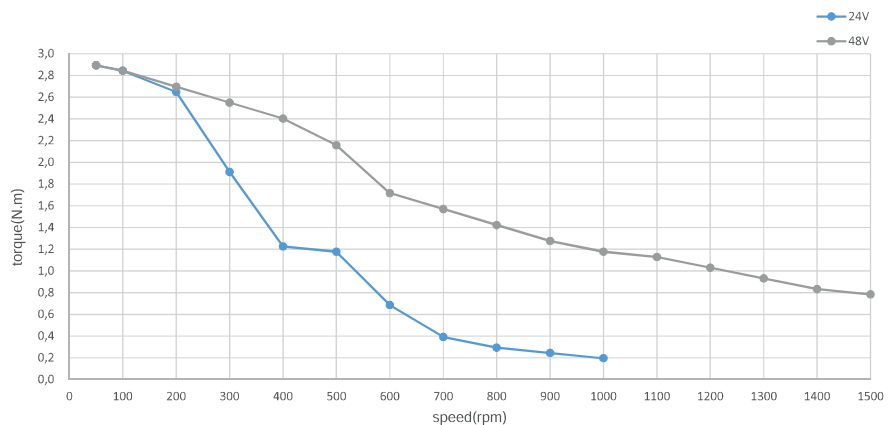






## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	220 N at 40 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 40



Incremental Encoder

## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features



Connectors at the lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.04 V	6.00 A/ph	0.34 ohm	2.70 mH	4.20 Nm	1900 g.cm <sup>2</sup>	2300 g.	4

## Mechanical drawing

Dimensions in mm

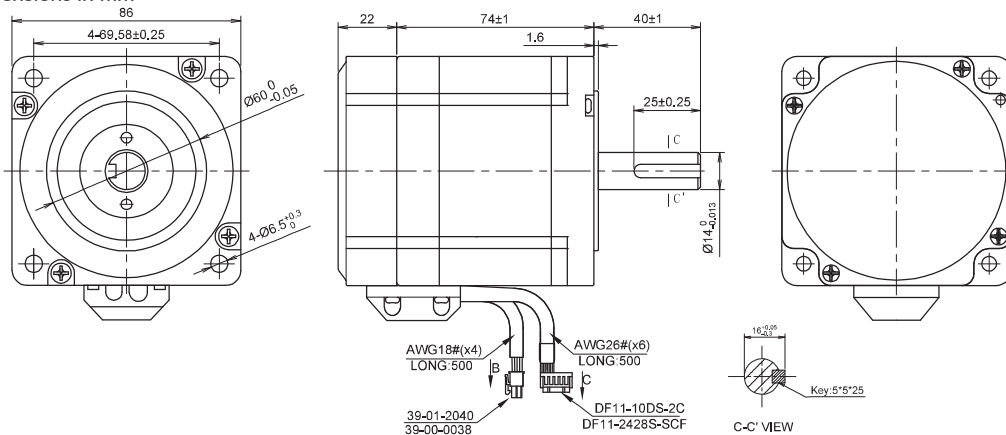



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	B, 130°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	80K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	500 Vac, 1 minute
<b>Max shaft radial load</b>	220 N at 31 mm from front flange
<b>Max shaft axial load</b>	60 N
<b>Protection IP</b>	IP40




## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.40 V	6.00 A/ph	0.40 ohm	3.30 mH	5.36 Nm	1878 g.cm <sup>2</sup>	2300 g.	4

## Mechanical drawing

Dimensions in mm

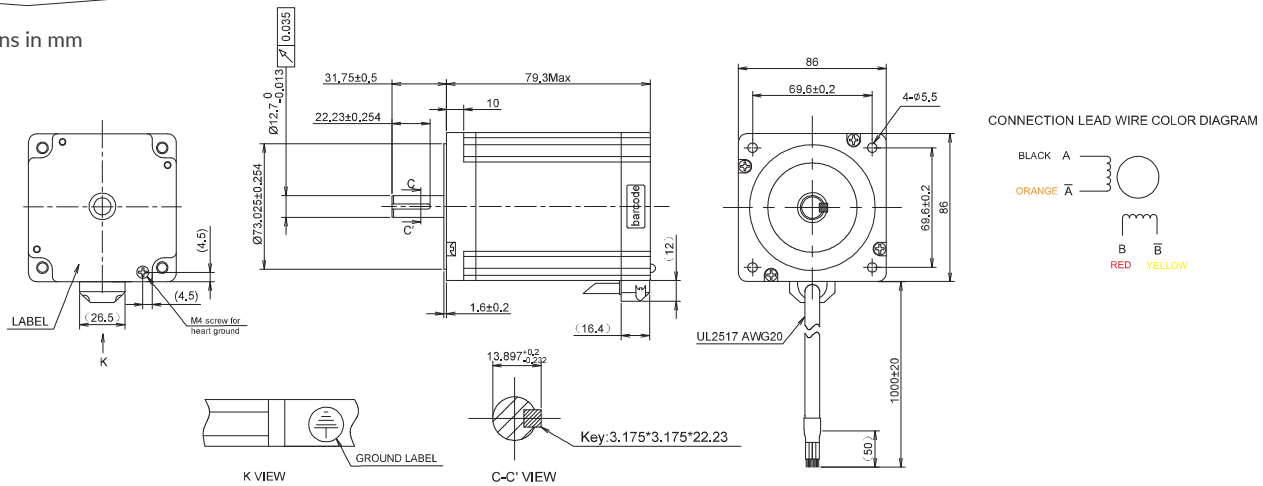







## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	F, 155°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	105K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	1500 Vac, 1 minute
Max shaft radial load	220 N at 30 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 40



-  115/230 Vac High Voltage
-  Incremental Encoder

## Encoder features


Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.04 V	2.00 A/ph	3.50 ohm	30.00 mH	7.00 Nm	2700 g.cm <sup>2</sup>	2900 g.	4


## Mechanical drawing

Dimensions in mm

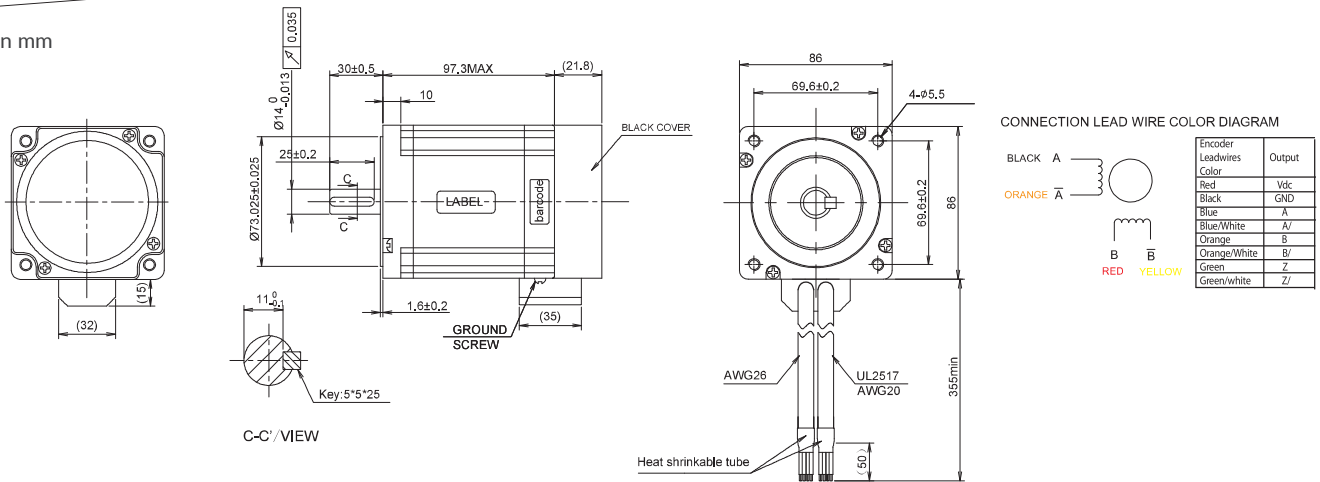

## Torque diagram

Drive conditions:  
Voltage 230 Vac  
Current 2.0 A/ph  
Half step

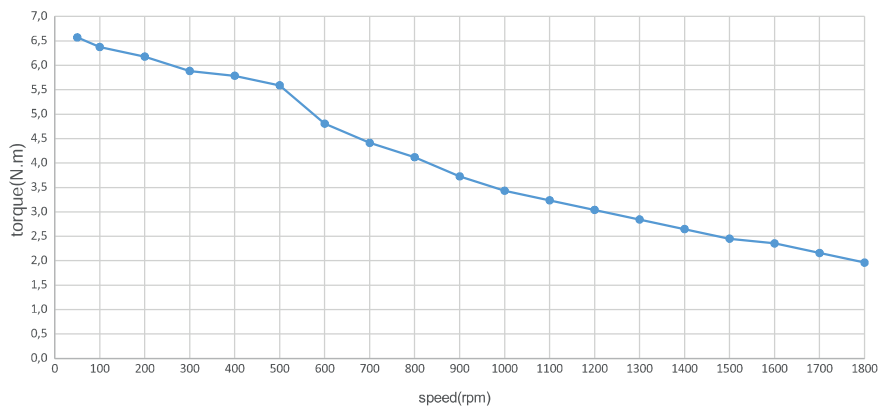



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	F, 155°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	105K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	1500 Vac, 1 minute
<b>Max shaft radial load</b>	220 N at 30 mm from front flange
<b>Max shaft axial load</b>	60 N
<b>Protection IP</b>	IP 43




115/230 Vac  
High Voltage

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.00 V	4.00 A/ph	1.00 ohm	8.00 mH	7.00 Nm	2700 g.cm <sup>2</sup>	3000 g.	4

## Mechanical drawing

Dimensions in mm

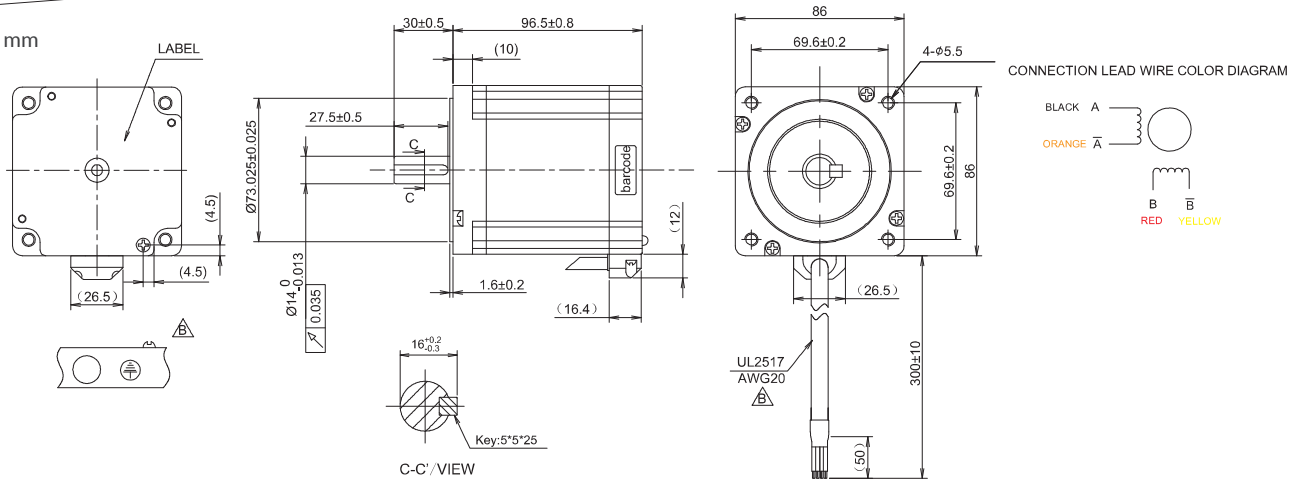






## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	220 N at 40 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 40



Incremental Encoder

## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features


Connectors at the lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.04 V	6.00 A/ph	0.46 ohm	3.80 mH	7.00 Nm	2800 g.cm <sup>2</sup>	2900 g.	4

## Mechanical drawing


Dimensions in mm

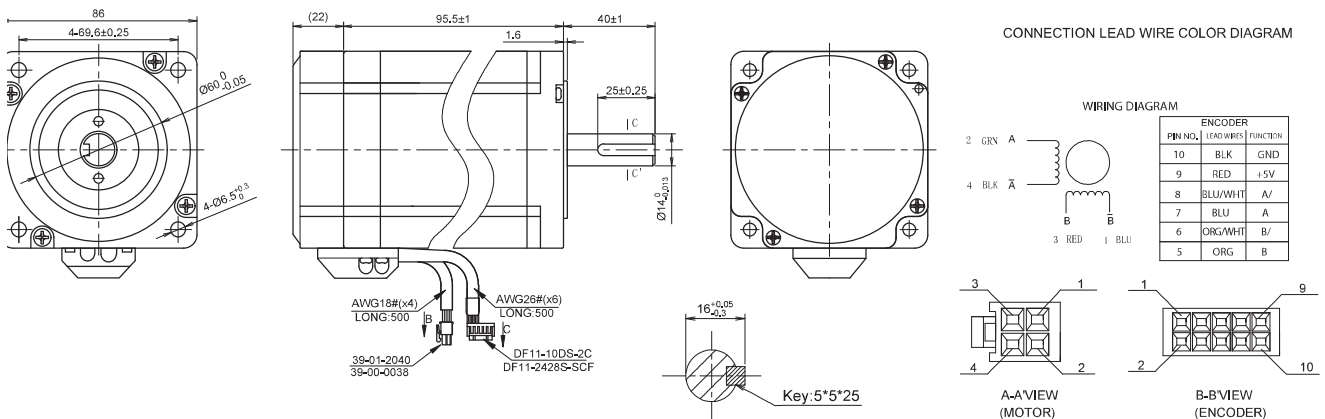



## Motor features

Step angle	1,8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	220 N at 40 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 40



## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features


Connectors at the lead wires end

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.12 V	6.00 A/ph	0.54 ohm	5.20 mH	8.20 Nm	3800 g.cm <sup>2</sup>	4000 g.	4


## Mechanical drawing

Dimensions in mm

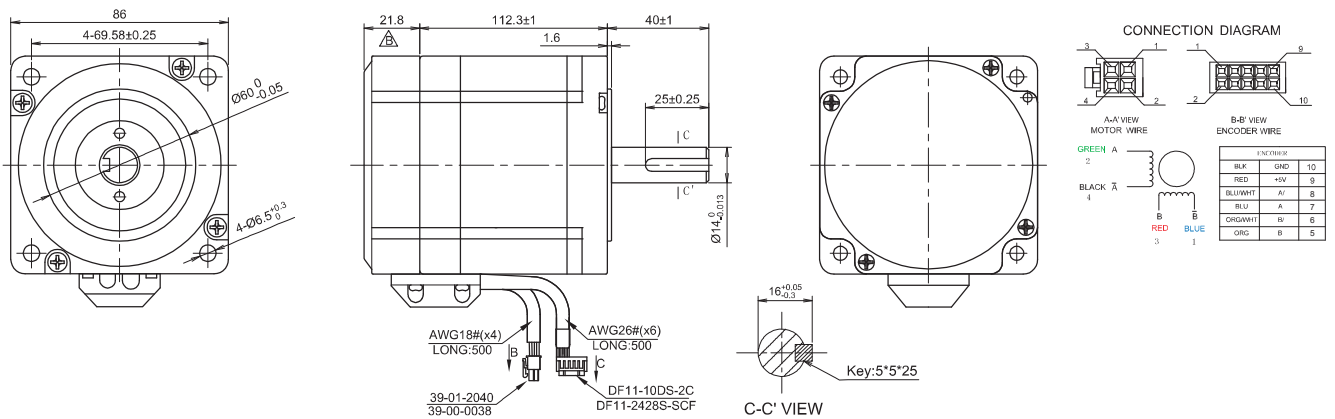

## Torque diagram

Drive conditions:  
Voltage 38 Vdc / 47 Vdc / 72 Vdc  
Current 6.0 A/ph  
Half step

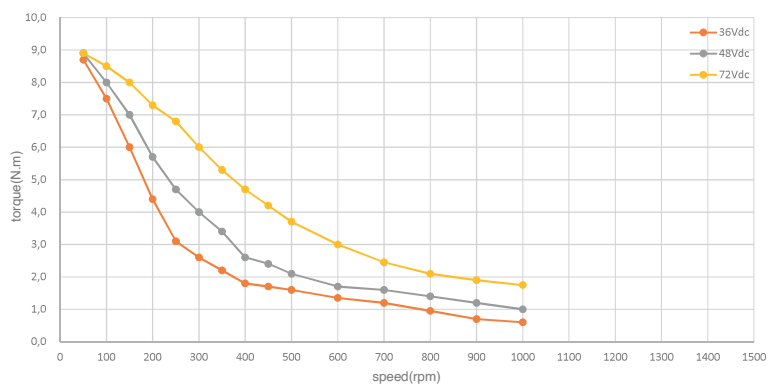



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	220 N at 40 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 40



Brake



Incremental Encoder

## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Other features


Brake	Power supply 24 Vdc
Connectors at the lead wires end	Braking force 5.0 Nm

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.24 V	6.00 A/ph	0.54 ohm	5.20 mH	8.20 Nm	3800 g.cm <sup>2</sup>	4000 g.	4

## Mechanical drawing


Dimensions in mm

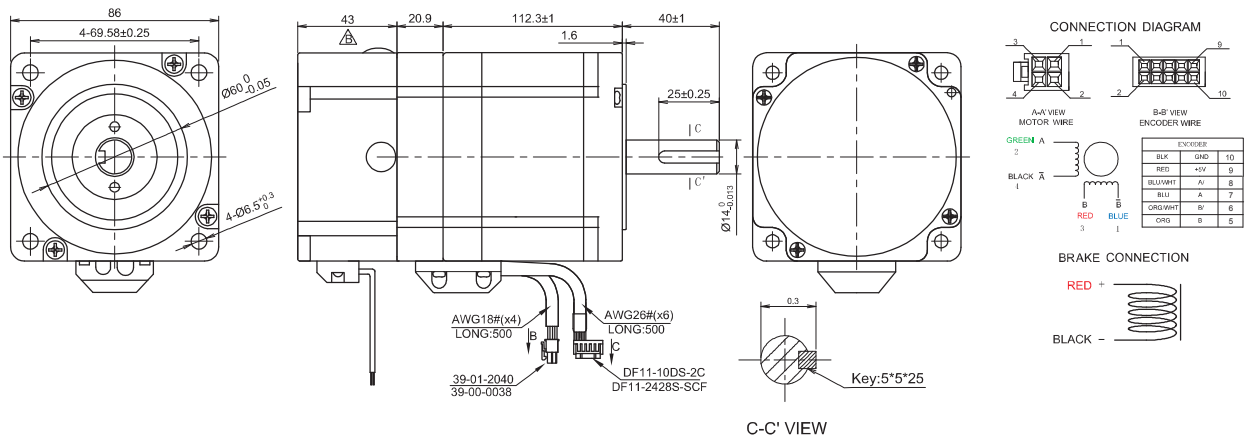



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	220 N at 30 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 65



## Encoder features

Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line Driver

## Other features

Connectors on board

## Optional


CBCP-00092: 7/8" 5 poles femal connector and 4.0 mt. cable for motor connection  
CBCP-00093: M12 8 poles femal connector and 4.0 mt. cable for encoder connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.40 V	6.00 A/ph	0.40 ohm	4.20 mH	8.50 Nm	3800 g.cm <sup>2</sup>	4000 g.	4

## Mechanical drawing

Dimensions in mm

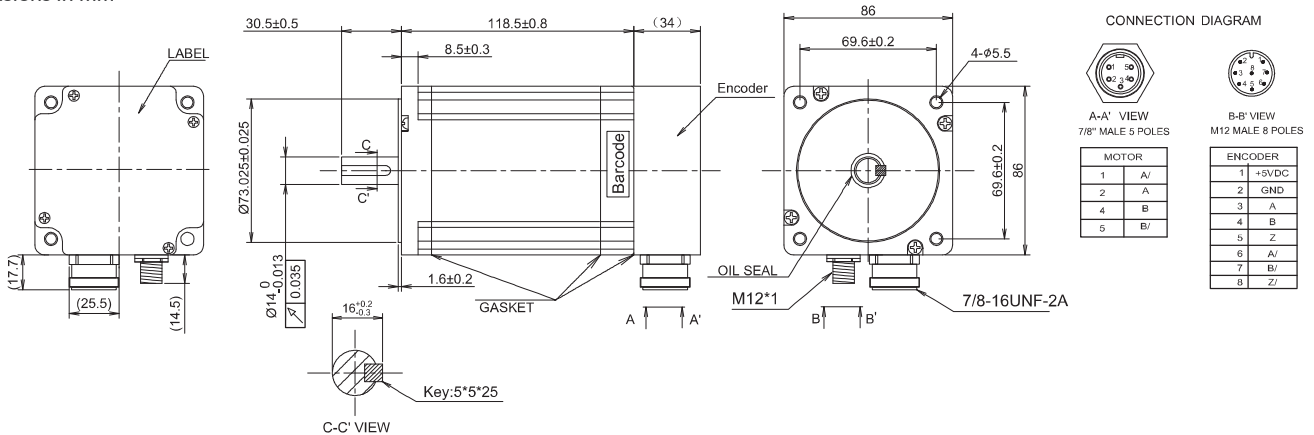



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	80K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	500 Vac, 1 minute
Max shaft radial load	220 N at 30 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 65



## Other features

Connector on board

## Optional



CBCP-00092: 7/8" 5 poles femal connector and 4.0 mt. cable for motor connection

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
2.40 V	6.00 A/ph	0.40 ohm	4.20 mH	8.50 Nm	3800 g.cm <sup>2</sup>	4000 g.	4

## Mechanical drawing

Dimensions in mm

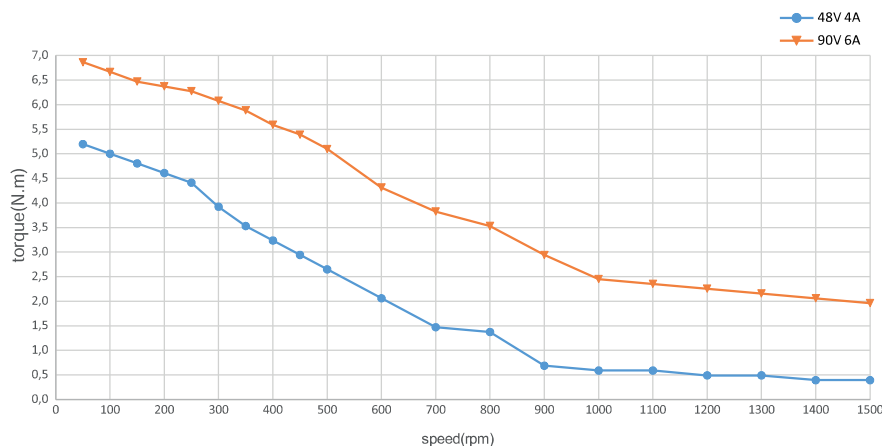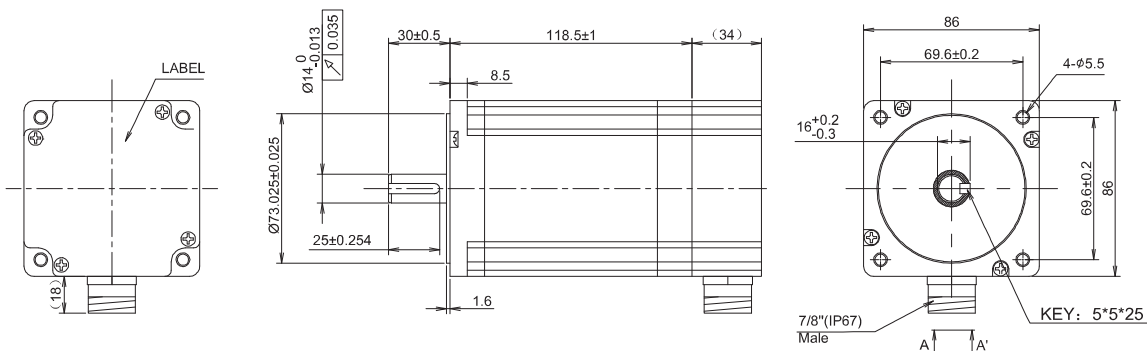

## Torque diagram


Drive conditions:  
Voltage 48 Vdc / 90 Vdc  
Current 4.0 A/ph and 6.0 A/ph  
Half step





## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	B, 130°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	80K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	500 Vac, 1 minute
<b>Max shaft radial load</b>	220 N at 31 mm from front flange
<b>Max shaft axial load</b>	60 N
<b>Protection IP</b>	IP 40

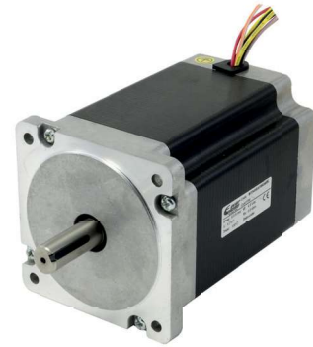


## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.12 V	6.00 A/ph	0.60 ohm	3.20 mH	11.80 Nm	3800 g.cm <sup>2</sup>	4000 g.	8

## Mechanical drawing

Dimensions in mm

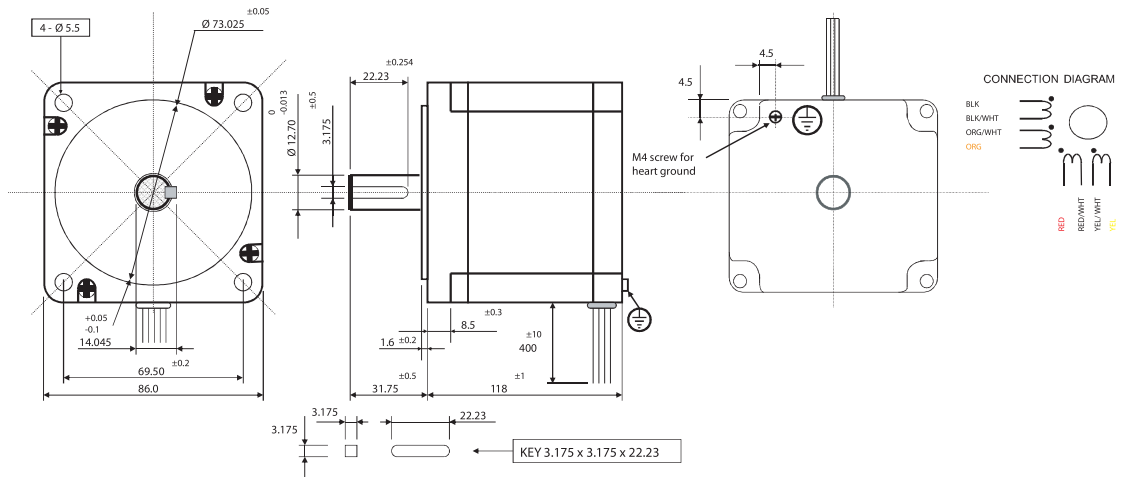








## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	F, 155°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	105K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	1500 Vac, 1 minute
Max shaft radial load	220 N at 30 mm from front flange
Max shaft axial load	60 N
Protection IP	IP 40



## Encoder features




Type	Incremental quadrature
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line driver

## Specification


Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.80 V	4.00 A/ph	1.20 ohm	11.00 mH	10.00 Nm	4000 g.cm <sup>2</sup>	4250 g.	4

## Mechanical drawing

Dimensions in mm

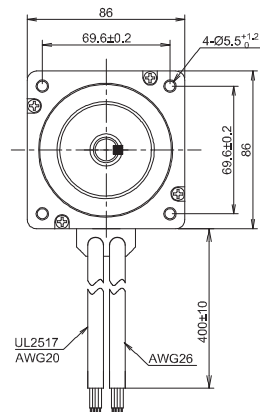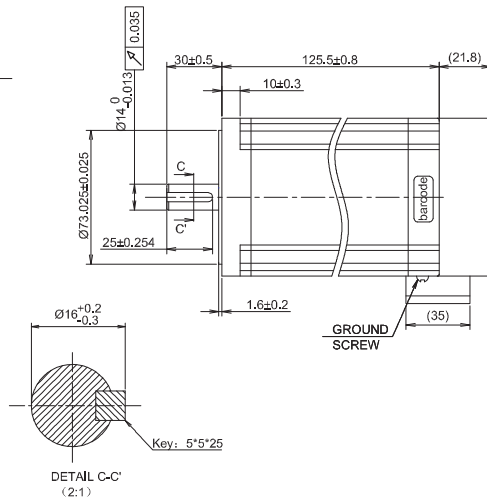

CONNECTION LEAD WIRE COLOR DIAGRAM



ENCODER LEAD WIRE COLOR	OUTPUT
RED	VDC
BLACK	GND
BLUE	A
ORANGE	B
ORANGE/WHITE	A'
GREEN	Z
GREEN/WHITE	Z'



## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	F, 155°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	105K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	1500 Vac, 1 minute
<b>Max shaft radial load</b>	220 N at 30 mm from front flange
<b>Max shaft axial load</b>	60 N
<b>Protection IP</b>	IP 40




115/230 Vac  
High Voltage

## Specification


Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.24 V	4.00 A/ph	1.20 ohm	11.00 mH	10.00 Nm	4000 g.cm <sup>2</sup>	4250 g.	4

## Mechanical drawing

Dimensions in mm

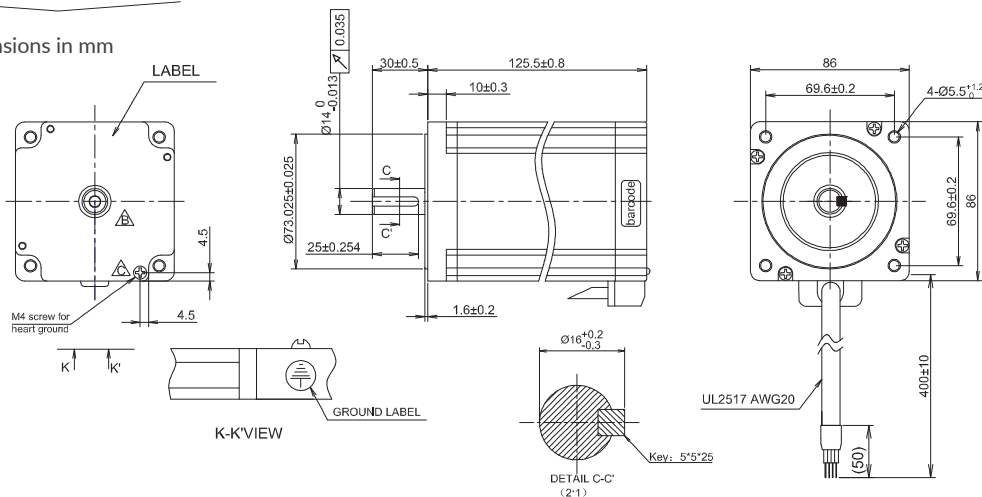

CONNECTION LEAD WIRE COLOR DIAGRAM








## Motor features

<b>Step angle</b>	1.8°
<b>Step angle accuracy</b>	±5%
<b>Insulation class</b>	F, 155°C
<b>Ambient temperature</b>	-20°C ÷ +50°C
<b>Max temperature rise</b>	105K
<b>Insulation resistance</b>	100 Mohm min. 500 Vdc
<b>Dielectric strength</b>	1500 Vac, 1 minute
<b>Max shaft radial load</b>	360 N at 55 mm from front flange
<b>Max shaft axial load</b>	100 N
<b>Protection IP</b>	IP 40

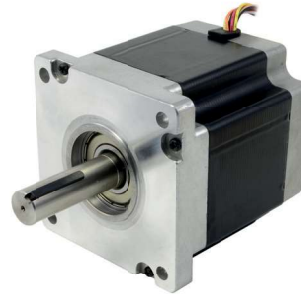




115/230 Vac  
High Voltage

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
3.30 V	7.50 A/ph	0.487 ohm	2.70 mH	12.00 Nm	5600 g.cm <sup>2</sup>	6000 g.	8

## Mechanical drawing

Dimensions in mm

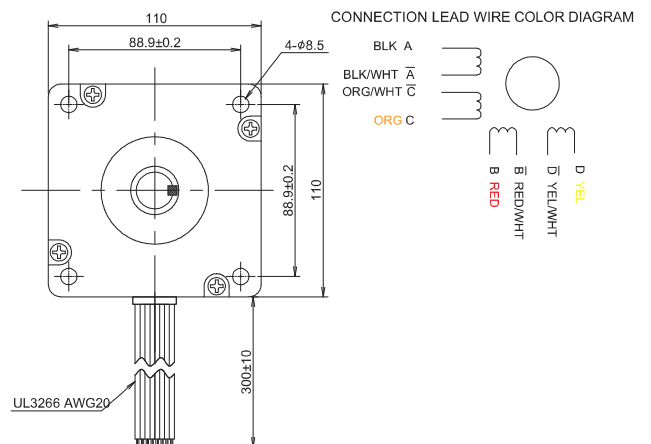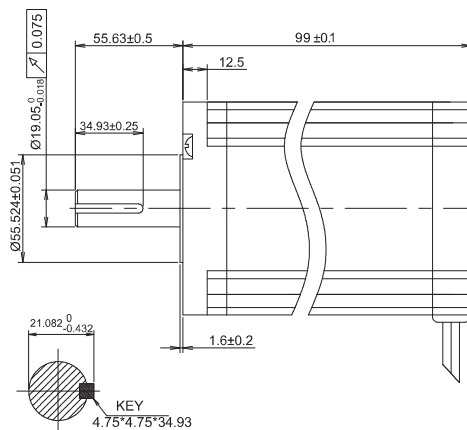



## Motor features

Step angle	1.8°
Step angle accuracy	±5%
Insulation class	F, 155°C
Ambient temperature	-20°C ÷ +50°C
Max temperature rise	105K
Insulation resistance	100 Mohm min. 500 Vdc
Dielectric strength	1500 Vac, 1 minute
Max shaft radial load	360 N at 55 mm from front flange
Max shaft axial load	100 N
Protection IP	IP 40






115/230 Vac  
High Voltage

## Specification

Rated voltage	Rated current	Phase resistance	Phase inductance	Holding torque	Rotor Inertia	Approx weight	Number of leads
4.80 V	11.00 A/ph	0.26 ohm	1.75 mH	22.00 Nm	11100 g.cm <sup>2</sup>	8700 g.	8

## Mechanical drawing

Dimensions in mm

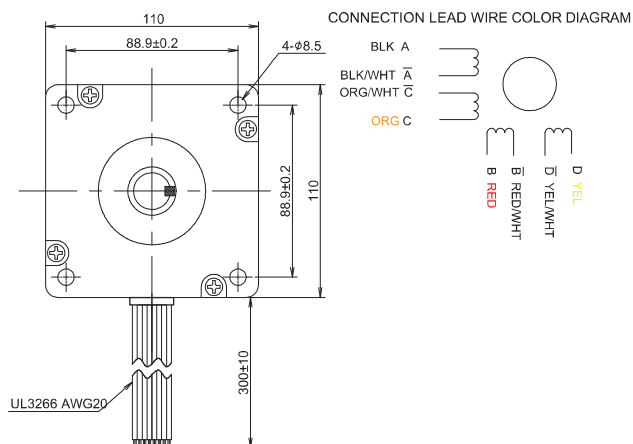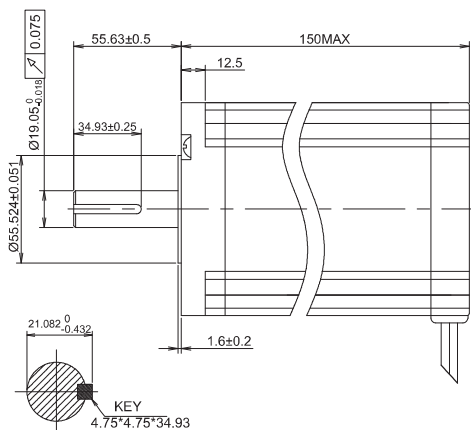







Ever Elettronica brushless AC motors are high-performance actuators equipped with the best features and all the other options of the standard specifications.



## AC BRUSHLESS MOTORS

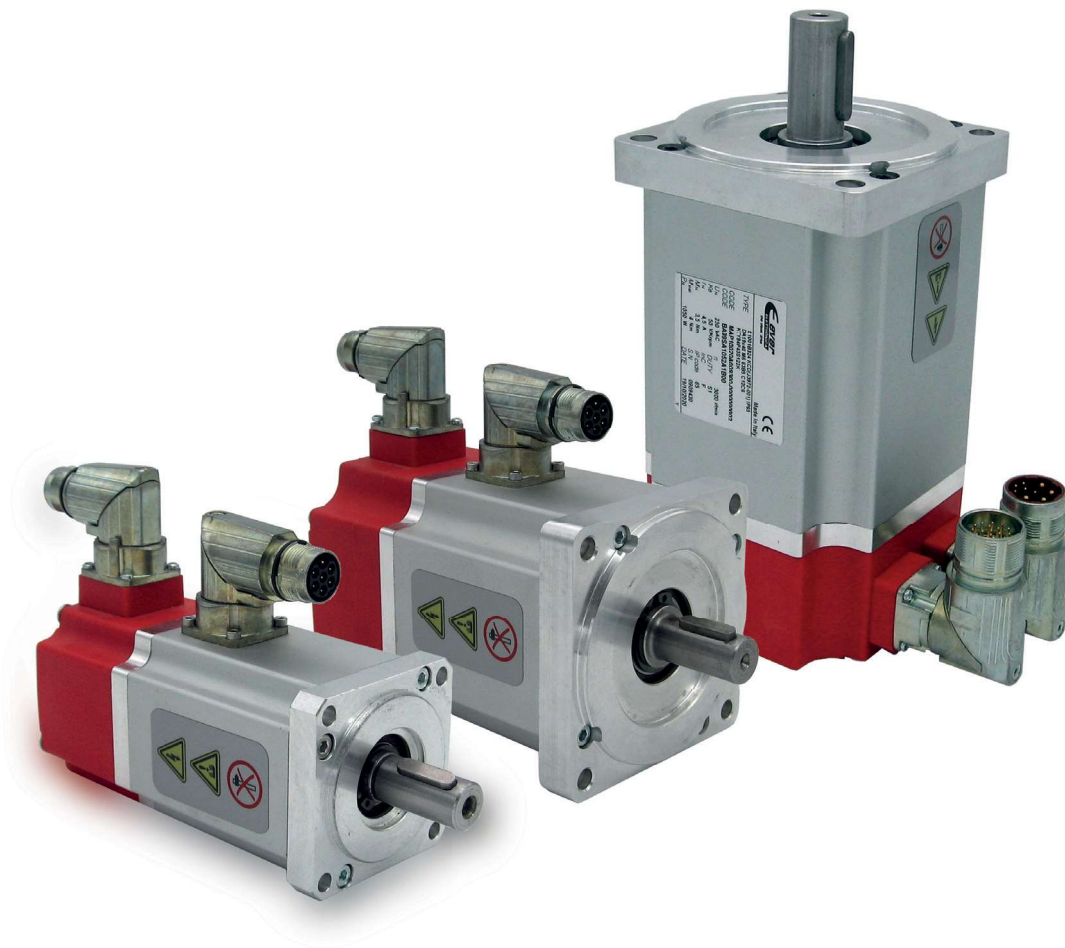

# Motors coding AC Brushless

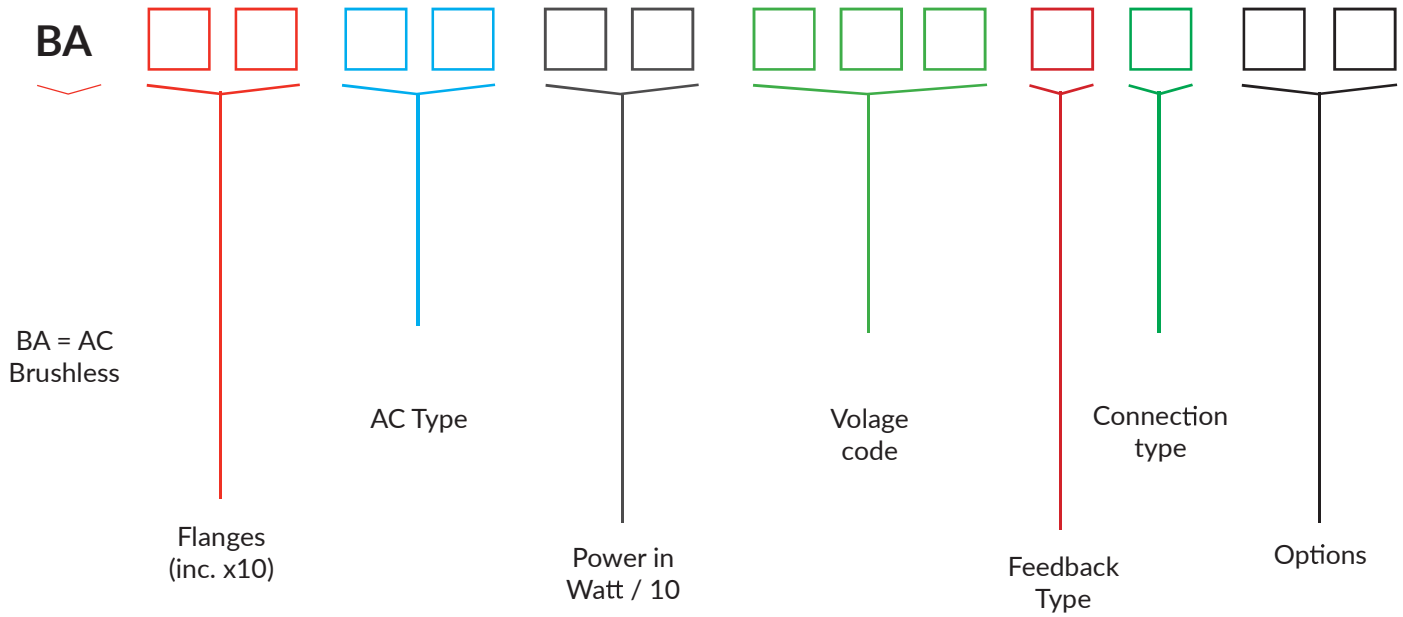




	Motor model	BA24SA022	BA24SA040	BA32SA075	BA39SA105	BA55SA140
Drive model						
AW5A6750		•	•	•		
AW5A9750		•	•	•		
AW5A91K5		•	•	•	•	•



## Motor features

Pole pairs	4
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	250 N
Max shaft axial load	80 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



-  IP65 Protection
-  Incremental Encoder
-  115/230 Vac High Voltage

## Encoder features



Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	400W	1.27 Nm	3000 rpm	2.0 A	2.12 A	1.35 Nm	8.5 A	4.05 Nm	7.15 ohm ±5%	21.0 mH ±5%	0.635 Nm/Arms ±5%	40.7 Vrms/Krpm	4000 rpm	0.228 Kg.m <sup>2</sup> ×10 <sup>-4</sup>	2.0 Kg. approx

## Mechanical drawing

Dimensions in mm

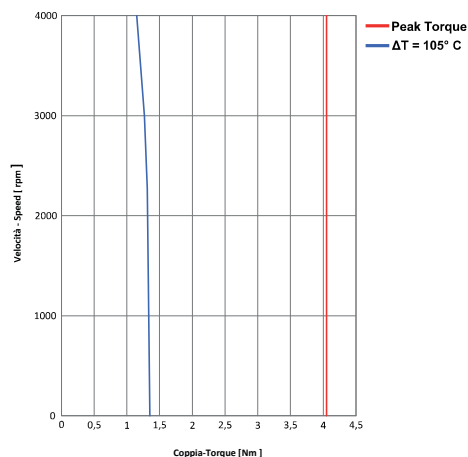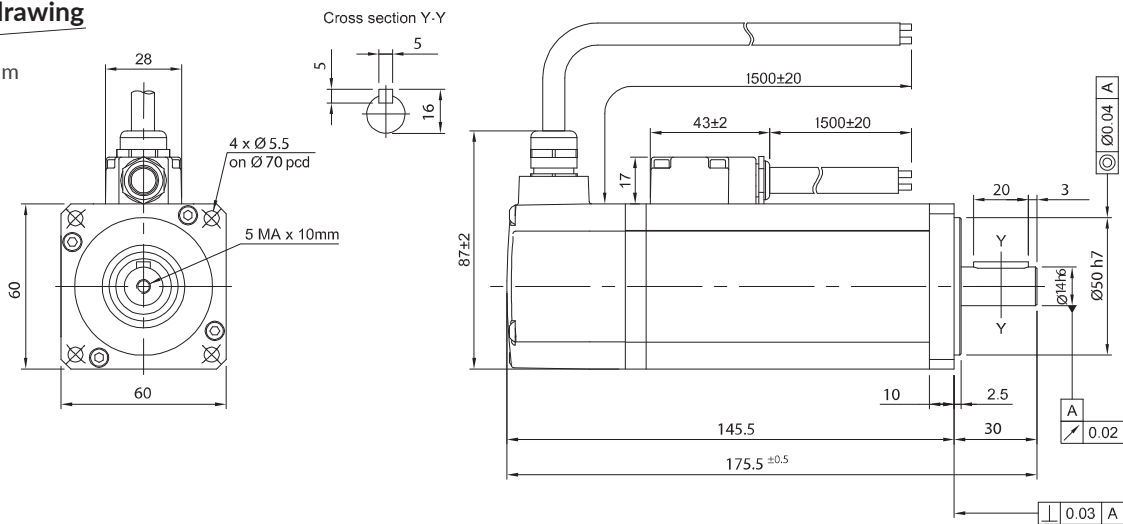

Torque diagram



### Motor features

Pole pairs	4
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	250 N
Max shaft axial load	80 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



- IP65 Protection
- Brake
- Incremental Encoder
- 115/230 Vac High Voltage

### Encoder features

Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

### Other features


Brake: Power supply	24 Vdc
Rated current	0.46 A
Breaking force	2 Nm

### Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	400 W	1.27 Nm	3000 rpm	2.00 A	2.12 A	1.35 Nm	8.5 A	4.05 Nm	7.15 ohm ±5%	21.0 mH ±5%	0.635 Nm/Arms ±5%	40.7 Vrms/Krpm	4000 rpm	0.228 Kg.m <sup>2</sup> x10 <sup>-4</sup>	2.0 Kg. approx

### Mechanical drawing

Dimensions in mm

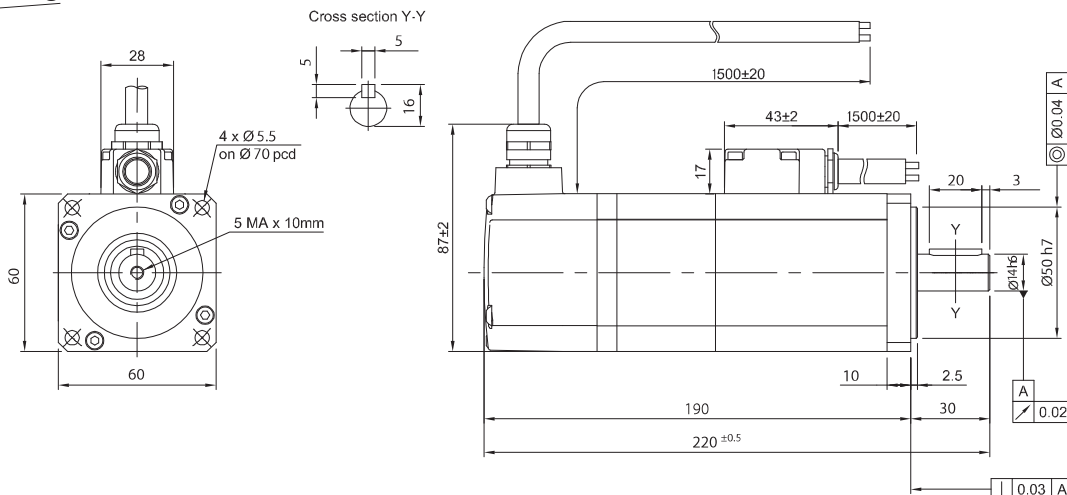

### Torque diagram

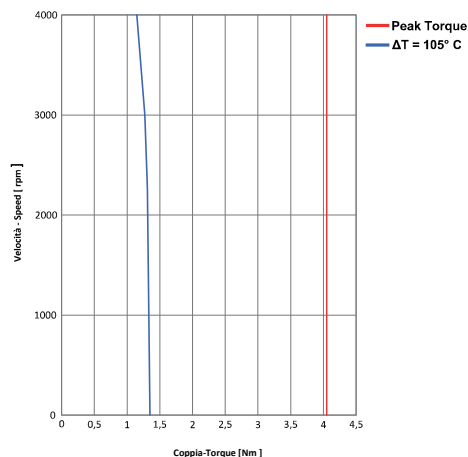



## Motor features

Pole pairs	4
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	250 N
Max shaft axial load	80 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



-  IP65 Protection
-  Multiturn Absolute Encoder
-  115/230 Vac High Voltage

## Encoder features



Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	400 W	1.27 Nm	3000 rpm	2.00 A	2.12 A	1.35 Nm	8.5 A	4.05 Nm	7.15 ohm ±5%	21.0 mH ±5%	0.635 Nm/Arms ±5%	40.7 Vrms/Krpm	4000 rpm	0.228 Kg.m²x10-4	2.0 Kg. approx

## Mechanical drawing

Dimensions in mm

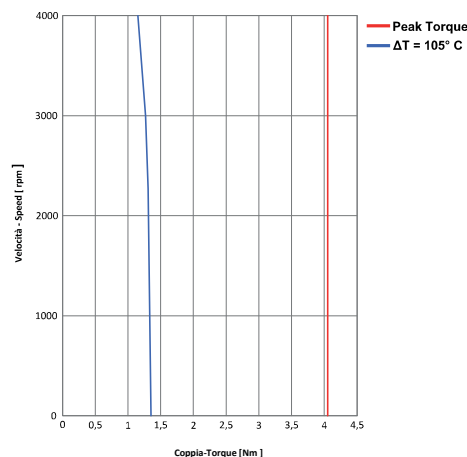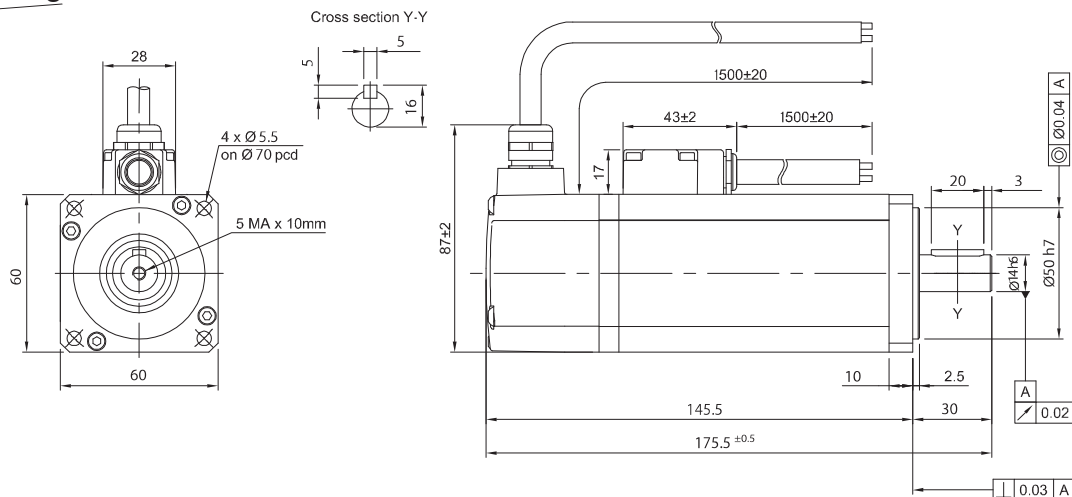

Torque diagram



## Motor features

Pole pairs	4
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	250 N
Max shaft axial load	80 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



- IP65 Protection
- Brake
- Multiturn Absolute Encoder
- 115/230 Vac High Voltage

## Encoder features

Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Other features


Brake: Power supply	24 Vdc
Rated current	0.46 A
Breaking force	2 Nm

## Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	400 W	1.27 Nm	3000 rpm	2.00 A	2.12 A	1.35 Nm	8.5 A	4.05 Nm	7.15 ohm ±5%	21.0 mH ±5%	0.635 Nm/Arms ±5%	40.7 Vrms/Krpm	4000 rpm	0.228 Kg.m <sup>2</sup> x10 <sup>-4</sup>	2.0 Kg. approx

## Mechanical drawing

Dimensions in mm

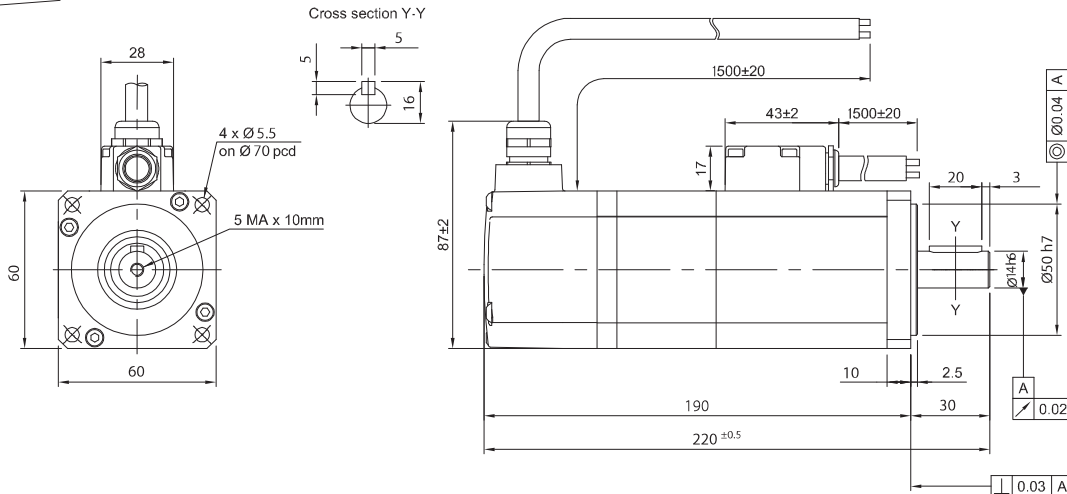

## Torque diagram

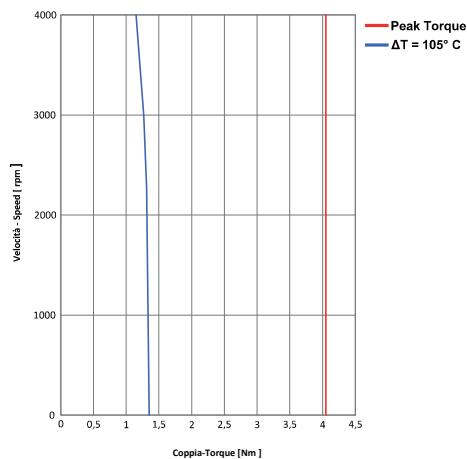



## Motor features

Pole pairs	3
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	420 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



- IP65 Protection
- Incremental Encoder
- 115/230 Vac High Voltage

## Encoder features

Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

## Optional



CBL/0276-150: M17 female connector and 1.5 mt. cable for motor connection  
 CBL/0276-500: M17 female connector and 5.0 mt. cable for motor connection  
 CBL/0287-150: M17 female connector and 1.5 mt. cable for encoder connection  
 CBL/0287-500: M17 female connector and 5.0 mt. cable for encoder connection

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	750 W	2.39 Nm	3000 rpm	3.75 A	2.90 A	2.50 Nm	8.70 A	7.50 Nm	3.95 ohm ±5%	29.5 mH ±5%	0.85 Nm/Arms ±5%	51.4 Vrms/Krpm	4000 rpm	0.614 Kg.m <sup>2</sup> x10 <sup>-4</sup>	3.6 Kg. approx

## Mechanical drawing

Dimensions in mm

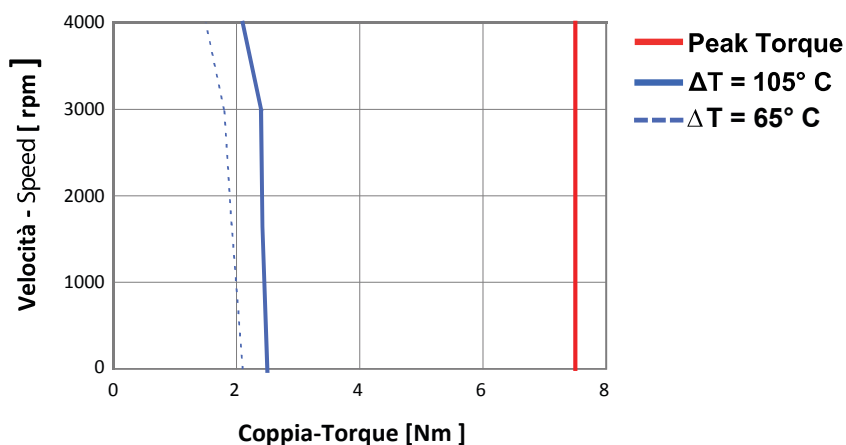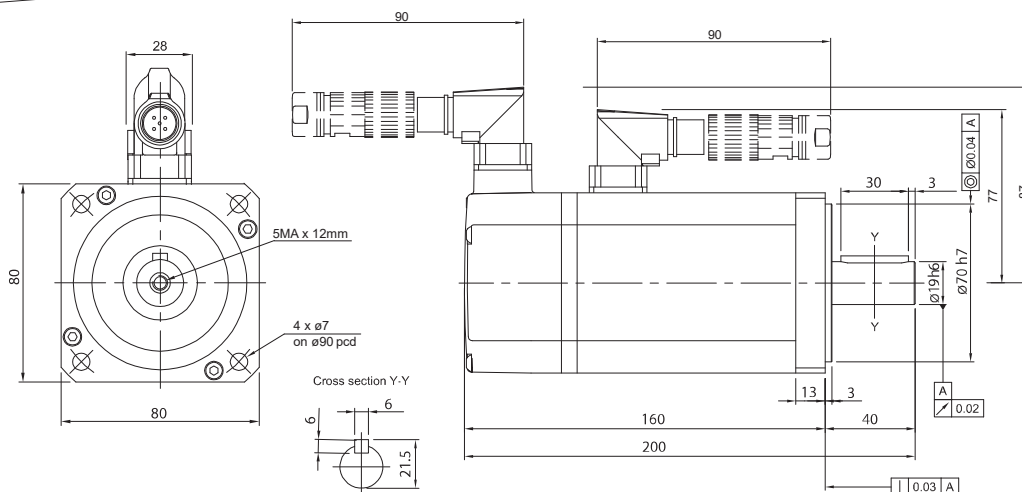

Torque diagram









## Motor features

Pole pairs	3
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	420 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



-  IP65 Protection
-  Brake
-  Incremental Encoder
-  115/230 Vac High Voltage

## Encoder features

Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

## Other features

<b>Brake: Power supply</b>	24 Vdc
<b>Rated current</b>	0.50 A
<b>Breaking force</b>	4,5 Nm

## Optional


CBL/0260-150: M17 female connector and 1.5 mt. cable for motor connection  
 CBL/0260-500: M17 female connector and 5.0 mt. cable for motor connection  
 CBL/0287-150: M17 female connector and 1.5 mt. cable for encoder connection  
 CBL/0287-500: M17 female connector and 5.0 mt. cable for encoder connection

## Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	750 W	2.39 Nm	3000 rpm	3.75 A	2.90 A	2.50 Nm	8.70 A	7.50 Nm	3.95 ohm ±5%	29.5 mH ±5%	0.85 Nm/Arms ±5%	51.4 Vrms/Krpm	4000 rpm	0.614 Kg.m <sup>2</sup> x10 <sup>-4</sup>	3.6 Kg. approx

## Mechanical drawing

Dimensions in mm

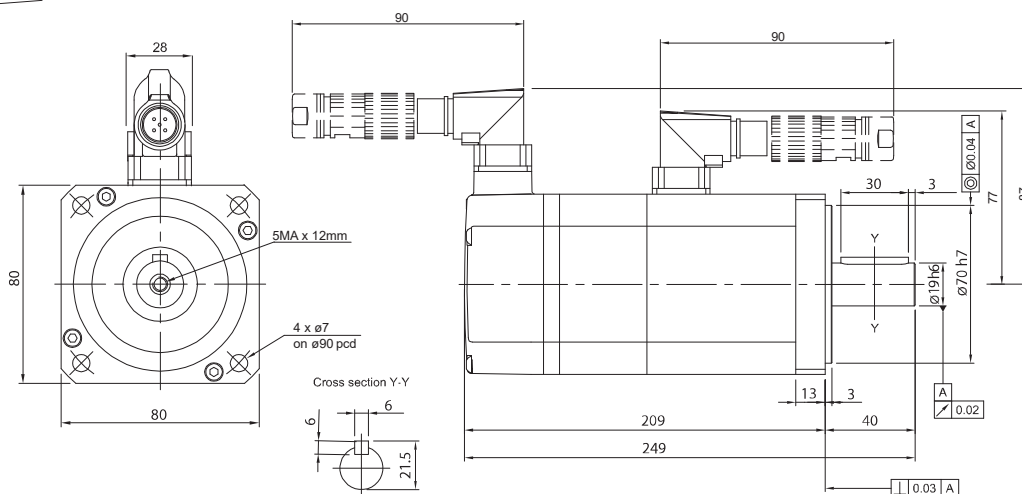

## Torque diagram

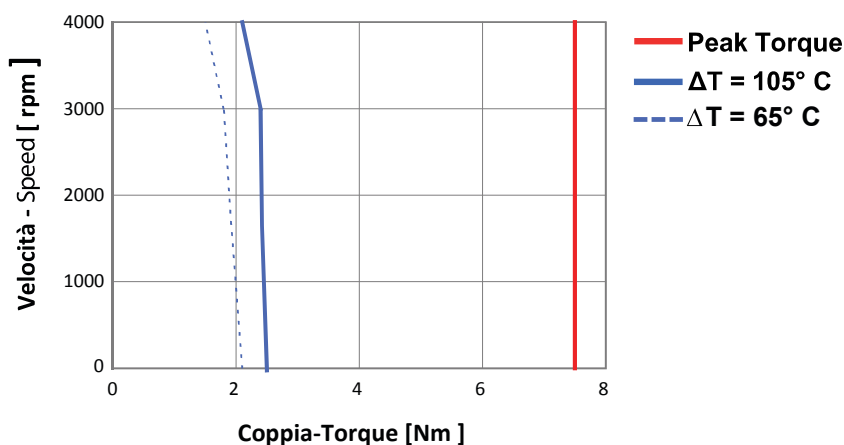



## Motor features

Pole pairs	3
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	420 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



- IP65 Protection
- Multiturn Absolute Encoder
- 115/230 Vac High Voltage

## Encoder features

Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Optional



CBL/0276-150: M17 female connector and 1.5 mt. cable for motor connection  
 CBL/0276-500: M17 female connector and 5.0 mt. cable for motor connection  
 CBL/0261-150: M17 female connector and 1.5 mt. cable for encoder connection  
 CBL/0261-500: M17 female connector and 5.0 mt. cable for encoder connection

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	750 W	2.39 Nm	3000 rpm	3.75 A	2.90 A	2.50 Nm	8.70 A	7.50 Nm	3.95 ohm ±5%	29.5 mH ±5%	0.85 Nm/Arms ±5%	51.4 Vrms/Krpm	4000 rpm	0.614 Kg.m <sup>2</sup> x10 <sup>-4</sup>	3.6 Kg. approx

## Mechanical drawing

Dimensions in mm

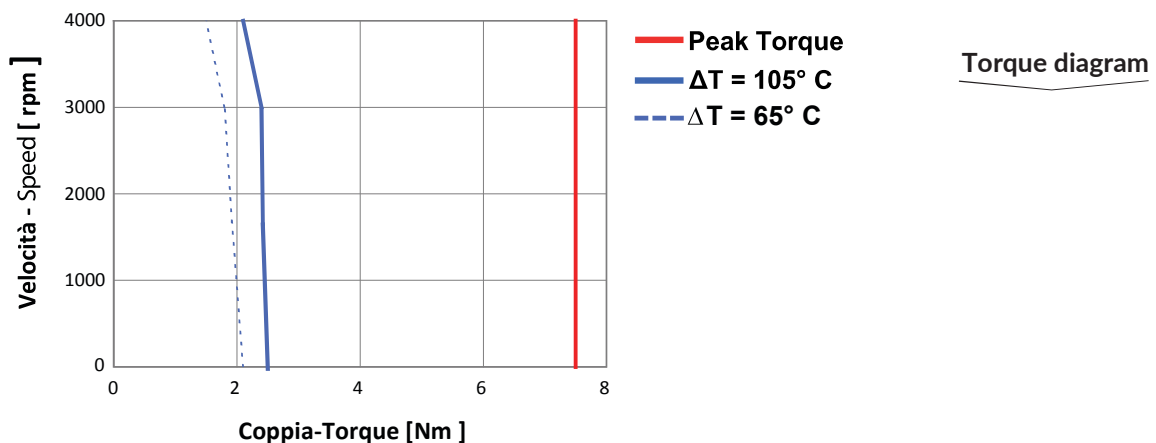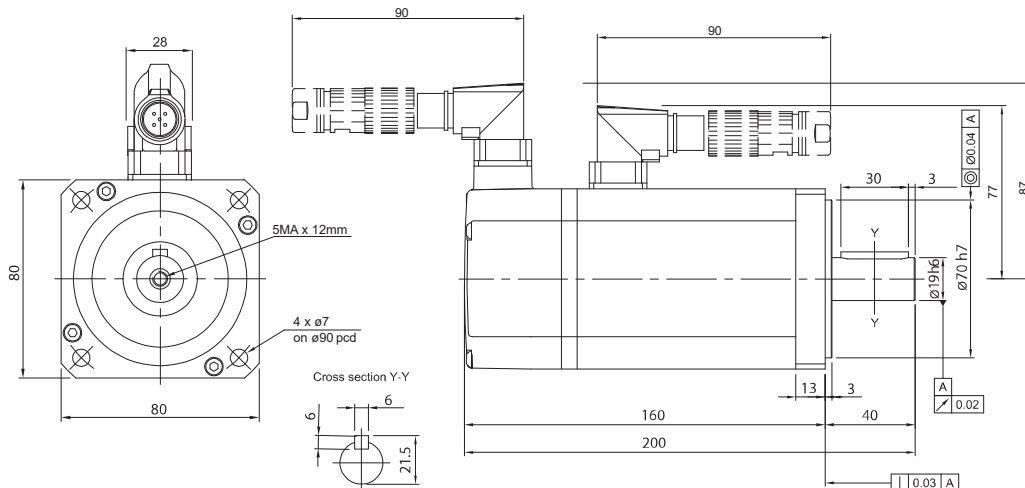



## Motor features

Pole pairs	3
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	420 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



- IP65 Protection
- Brake
- Multiturn Absolute Encoder
- 115/230 Vac High Voltage

## Encoder features

Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Other features

Brake: Power supply	24 Vdc
Rated current	0.50 A
Breaking force	4,5 Nm

## Optional


CBL/0260-150: M17 female connector and 1.5 mt. cable for motor connection  
 CBL/0260-500: M17 female connector and 5.0 mt. cable for motor connection  
 CBL/0261-150: M17 female connector and 1.5 mt. cable for encoder connection  
 CBL/0261-500: M17 female connector and 5.0 mt. cable for encoder connection

## Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	750 W	2.39 Nm	3000 rpm	3.75 A	2.90 A	2.50 Nm	8.70 A	7.50 Nm	3.95 ohm ±5%	29.5 mH ±5%	0.85 Nm/Arms ±5%	51.4 Vrms/Krpm	4000 rpm	0.614 Kg.m <sup>2</sup> x10 <sup>-4</sup>	3.6 Kg. approx

## Mechanical drawing

Dimensions in mm

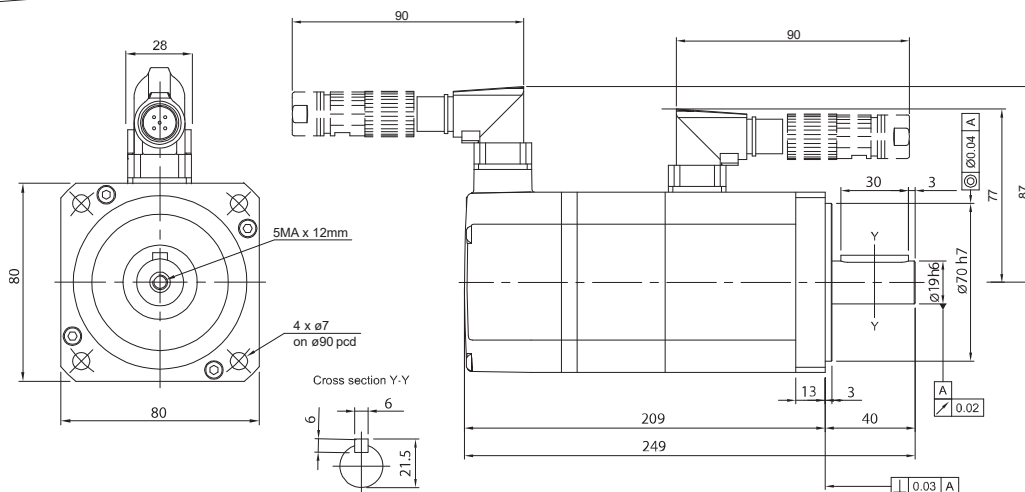



## Torque diagram

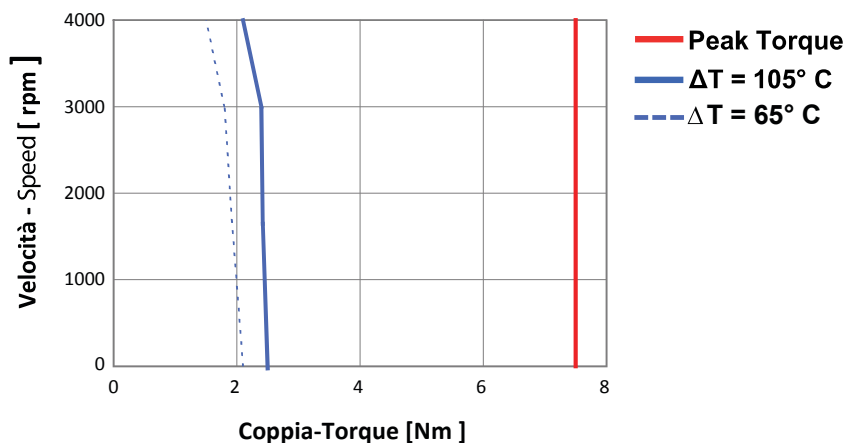



## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	600 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



## Encoder features

Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

## Optional



CBL/0262-150: M23 female connector and 1.5 mt. cable for motor connection  
 CBL/0262-500: M23 female connector and 5.0 mt. cable for motor connection  
 CBL/0263-150: M23 female connector and 1.5 mt. cable for encoder connection  
 CBL/0263-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1050 W	3.50 Nm	3000 rpm	4.50 A	5.10 A	4.00 Nm	16.30 A	12.0 Nm	1.40 ohm ±5%	13.5 mH ±5%	0.82 Nm/Arms ±5%	50.0 Vrms/Krpm	4000 rpm	2.70 Kg.m <sup>2</sup> x10 <sup>-4</sup>	5.46 Kg. approx

## Mechanical drawing

Dimensions in mm

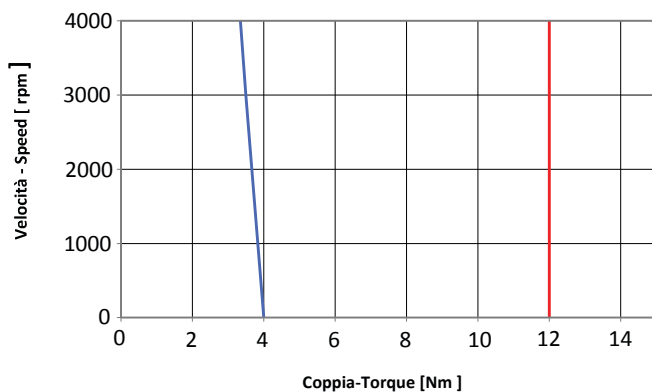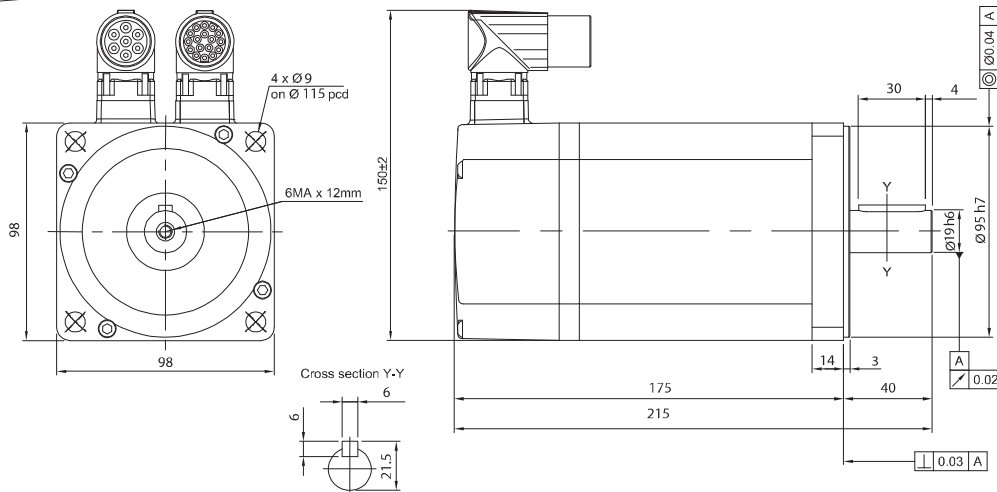

— Peak Torque  
 —  $\Delta T = 105^\circ C$





Torque diagram



## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	600 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



-  IP65 Protection
-  Brake
-  Incremental Encoder
-  115/230 Vac High Voltage

## Encoder features

Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

## Other features

<b>Brake: Power supply</b>	24 Vdc
<b>Rated current</b>	0,75 A
<b>Breaking force</b>	9 Nm

## Optional


CBL/0266-150: M23 female connector and 1.5 mt. cable for motor connection  
 CBL/0266-500: M23 female connector and 5.0 mt. cable for motor connection  
 CBL/0263-150: M23 female connector and 1.5 mt. cable for encoder connection  
 CBL/0263-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1050 W	3.50 Nm	3000 rpm	4.50 A	5.10 A	4.00 Nm	16.30 A	12.0 Nm	1.40 ohm ±5%	13.5 mH ±5%	0.82 Nm/Arms ±5%	50.0 Vrms/Krpm	4000 rpm	2.70 Kg.m <sup>2</sup> x10 <sup>-4</sup>	5.46 Kg. approx

## Mechanical drawing

Dimensions in mm

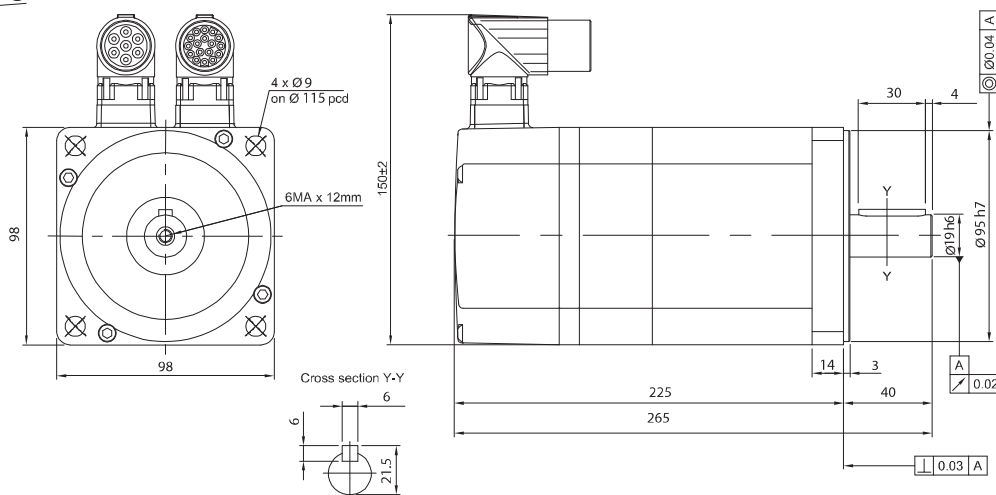

## Torque diagram

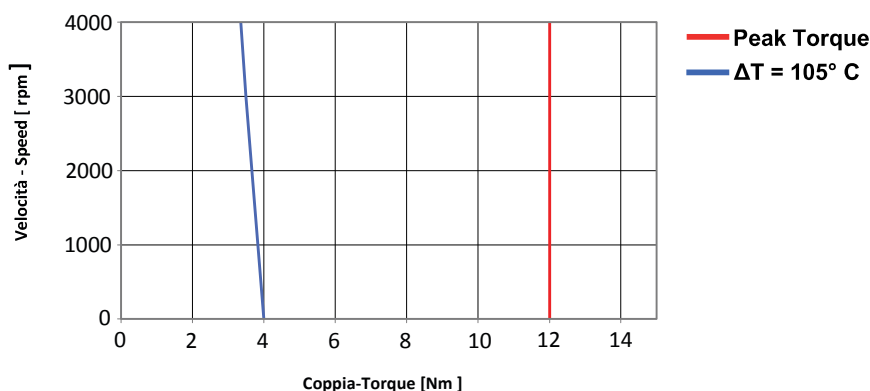



## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	600 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



- IP65 Protection
- Multiturn Absolute Encoder
- 115/230 Vac High Voltage

## Encoder features

Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Optional



- CBL/0262-150: M23 female connector and 1.5 mt. cable for motor connection
- CBL/0262-500: M23 female connector and 5.0 mt. cable for motor connection
- CBL/0267-150: M23 female connector and 1.5 mt. cable for encoder connection
- CBL/0267-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1050 W	3.50 Nm	3000 rpm	4.50 A	5.10 A	4.00 Nm	16.30 A	12.0 Nm	1.40 ohm ±5%	13.5 mH ±5%	0.82 Nm/Arms ±5%	50.0 Vrms/Krpm	4000 rpm	2.70 Kg.m <sup>2</sup> x10 <sup>-4</sup>	5.46 Kg. approx

## Mechanical drawing

Dimensions in mm

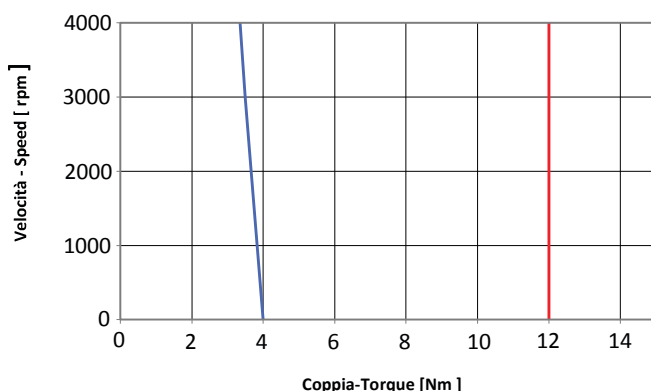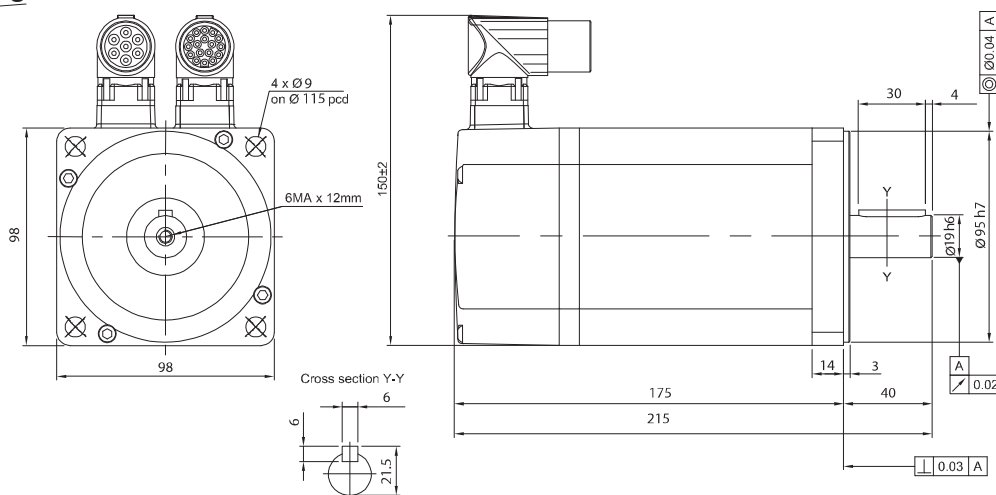

Torque diagram



## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	600 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



-  IP65 Protection
-  Brake
-  Absolute Multiturn Encoder
-  115/230 Vac High Voltage

## Encoder features

Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Other features

<b>Brake: Power supply</b>	24 Vdc
<b>Rated current</b>	0,75 A
<b>Breaking force</b>	9 Nm

## Optional


CBL/0266-150: M23 female connector and 1.5 mt. cable for motor connection  
 CBL/0266-500: M23 female connector and 5.0 mt. cable for motor connection  
 CBL/0267-150: M23 female connector and 1.5 mt. cable for encoder connection  
 CBL/0267-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1050 W	3.50 Nm	3000 rpm	4.50 A	5.10 A	4.00 Nm	16.30 A	12.0 Nm	1.40 ohm ±5%	13.5 mH ±5%	0.82 Nm/Arms ±5%	50.0 Vrms/Krpm	4000 rpm	2.70 Kg.m <sup>2</sup> x10 <sup>-4</sup>	5.46 Kg. approx

## Mechanical drawing

Dimensions in mm

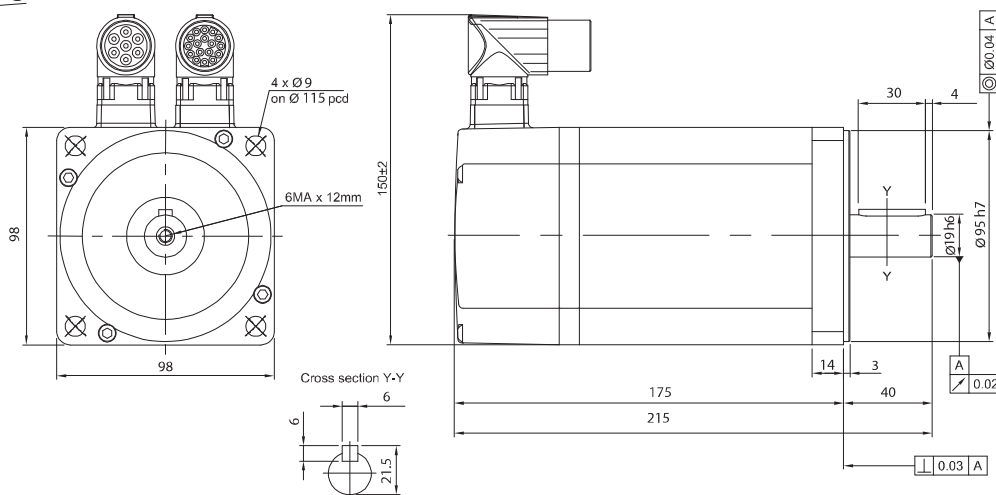

## Torque diagram

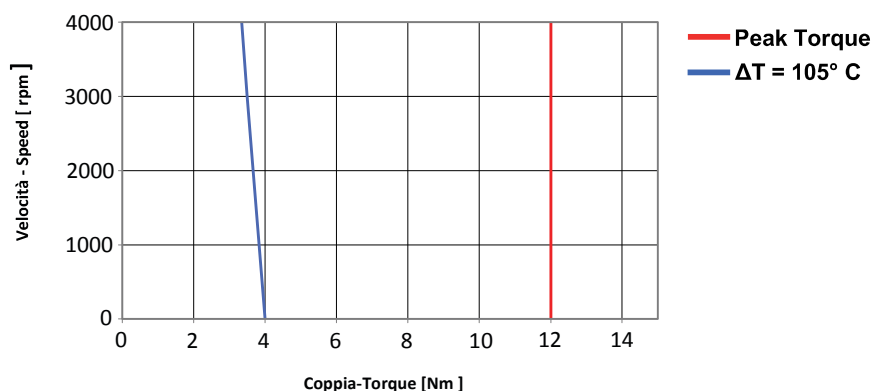



## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	1200 N
Max shaft axial load	600 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



-  IP65 Protection
-  Incremental Encoder
-  115/230 Vac High Voltage

## Encoder features

Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

## Optional



- CBL/0262-150: M23 female connector and 1.5 mt. cable for motor connection
- CBL/0262-500: M23 female connector and 5.0 mt. cable for motor connection
- CBL/0263-150: M23 female connector and 1.5 mt. cable for encoder connection
- CBL/0263-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1400 W	4.50 Nm	3000 rpm	5.20 A	6.80 A	20.5 Nm	20.5 A	18.0 Nm	8.70 ohm ±5%	47.0 mH ±5%	0.87 Nm/Arms ±5%	49.5 Vrms/Krpm	4000 rpm	6.10 Kg.m²x10-4	5.50 Kg. approx

## Mechanical drawing

Dimensions in mm

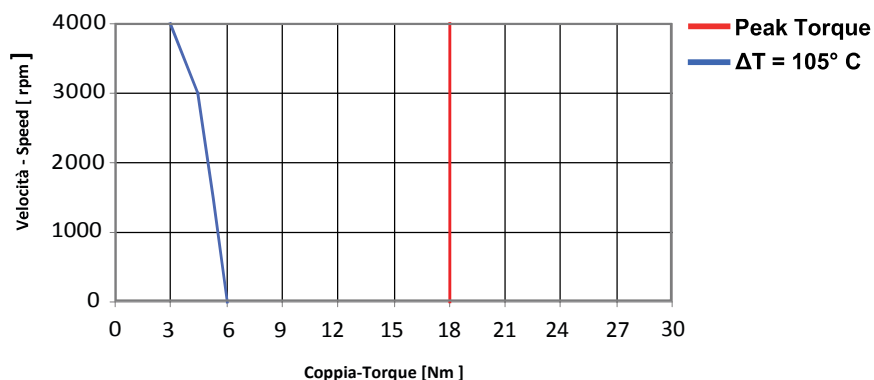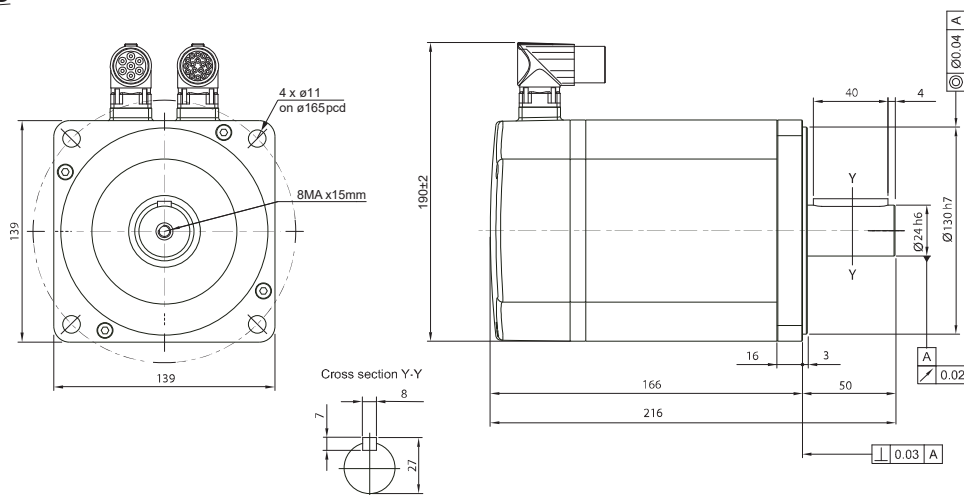

Torque diagram









## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	600 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



-  IP65 Protection
-  Brake
-  Incremental Encoder
-  115/230 Vac High Voltage

## Encoder features

Type	Incremental
Resolution	2048 ppr
Output Interface	Line driver
Power supply	5.00 Vdc

## Other features

<b>Brake:</b>	<b>Power supply</b>	24 Vdc
	<b>Rated current</b>	1.00 A
	<b>Breaking force</b>	18 Nm

## Optional


CBL/0266-150: M23 female connector and 1.5 mt. cable for motor connection  
 CBL/0266-500: M23 female connector and 5.0 mt. cable for motor connection  
 CBL/0263-150: M23 female connector and 1.5 mt. cable for encoder connection  
 CBL/0263-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1400 W	4.50 Nm	3000 rpm	5.20 A	6.80 A	6.00 Nm	20.50 A	18.0 Nm	8.7 ohm ±5%	47 mH ±5%	0.87 Nm/Arms ±5%	49.50 Vrms/Krpm	4000 rpm	6.10 Kg.m <sup>2</sup> x10 <sup>-4</sup>	5.50 Kg. approx

## Mechanical drawing

Dimensions in mm

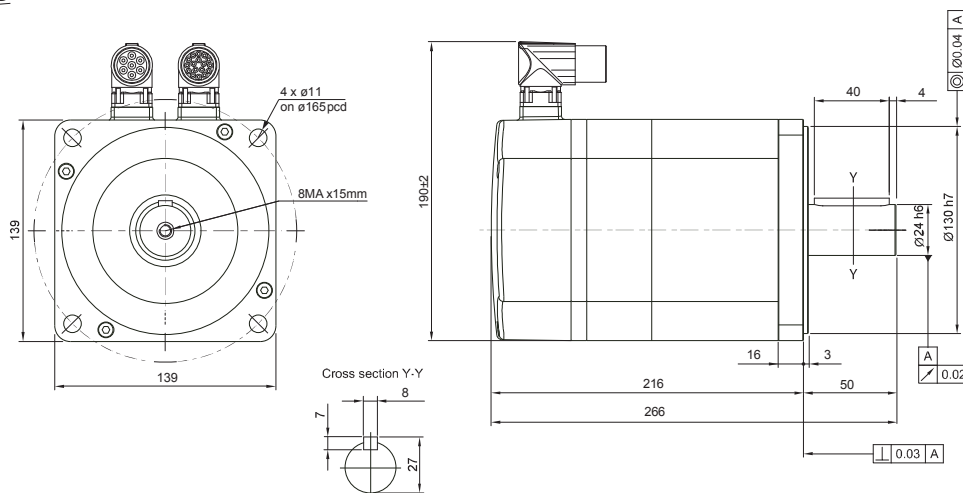

## Torque diagram

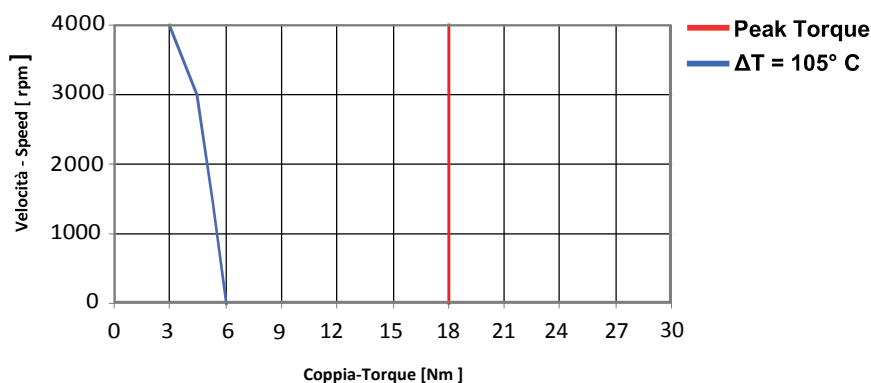



## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	1200 N
Max shaft axial load	600 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



- IP65 Protection
- Multiturn Absolute Encoder
- 115/230 Vac High Voltage

## Encoder features

Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Optional



- CBL/0262-150: M23 female connector and 1.5 mt. cable for motor connection
- CBL/0262-500: M23 female connector and 5.0 mt. cable for motor connection
- CBL/0267-150: M23 female connector and 1.5 mt. cable for encoder connection
- CBL/0267-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification

Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1400 W	4.50 Nm	3000 rpm	5.20 A	6.80 A	20.5 Nm	20.5 A	18.0 Nm	8.70 ohm ±5%	47.0 mH ±5%	0.87 Nm/Arms ±5%	49.5 Vrms/Krpm	4000 rpm	6.10 Kg.m <sup>2</sup> x10 <sup>-4</sup>	5.50 Kg. approx

## Mechanical drawing

Dimensions in mm

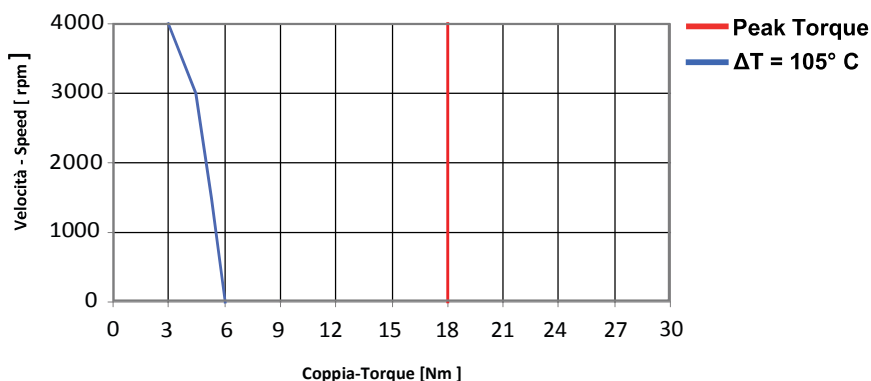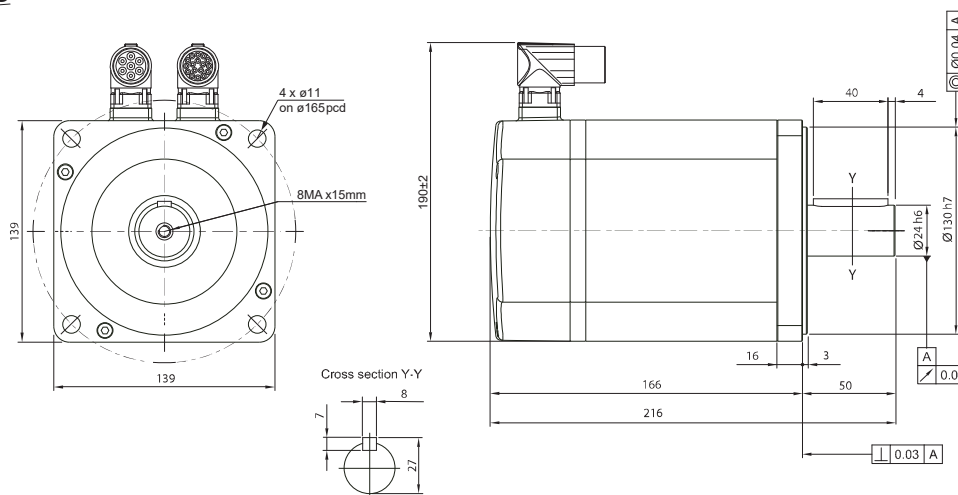

Torque diagram



## Motor features

Pole pairs	5
Thermic sensor	Included
Insulation class	F, 155°C
Ambient temperature	0°C ÷ +40°C
Max temperature rise	105K
Max shaft radial load	600 N
Max shaft axial load	150 N
Protection IP	IP 65
Cooling method	Totally enclosed, self cooled
Environment	far from any active gas, combustible gas, oil drop, ash



## Encoder features

Type	Multiturn absolute encoder
Resolution	16 bits multiturn, 17 bits single turn
Output Interface	Biss-C
Power supply	5.00 Vdc

## Other features

<b>Brake:</b>	Power supply	24 Vdc
	Rated current	1.0 A
	Breaking force	18 Nm

## Optional


CBL/0266-150: M23 female connector and 1.5 mt. cable for motor connection  
 CBL/0266-500: M23 female connector and 5.0 mt. cable for motor connection  
 CBL/0267-150: M23 female connector and 1.5 mt. cable for encoder connection  
 CBL/0267-500: M23 female connector and 5.0 mt. cable for encoder connection

## Specification


Voltage	Rated power	Rated torque	Rated speed	Rated current	Stall current	Stall torque	Peak current	Peak torque	Winding resistance	Winding inductance	Torque constant	Voltage constant	Max speed	Rotor inertia	Weight
230 Vac	1400 W	4.50 Nm	3000 rpm	5.20 A	6.80 A	6.00 Nm	20.50 A	18.0 Nm	8.7 ohm ±5%	47 mH ±5%	0.87 Nm/Arms ±5%	49.50 Vrms/Krpm	4000 rpm	6.10 Kg.m <sup>2</sup> x10 <sup>-4</sup>	5.50 Kg. approx

## Mechanical drawing

Dimensions in mm

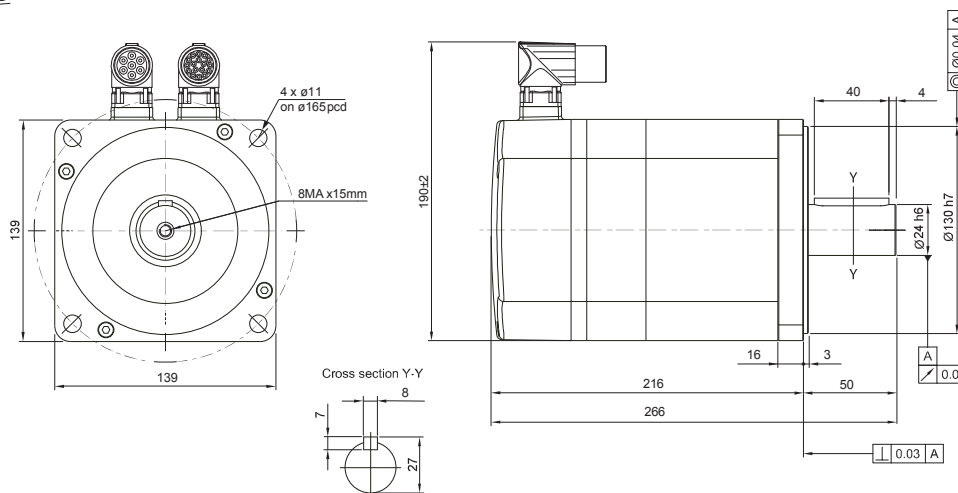


## Torque diagram

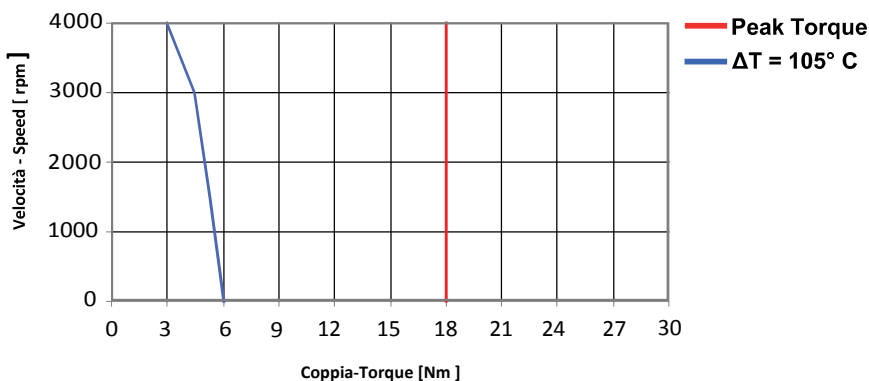


The new series of brushless DC motors has been designed not only to be more efficient and save energy, but also to optimize overall size and operating costs. The brushless DC motors, which are more powerful compared to asynchronous induction motors, are ideally suited to use for textile, packaging and food-related machinery.



## DC BRUSHLESS MOTORS

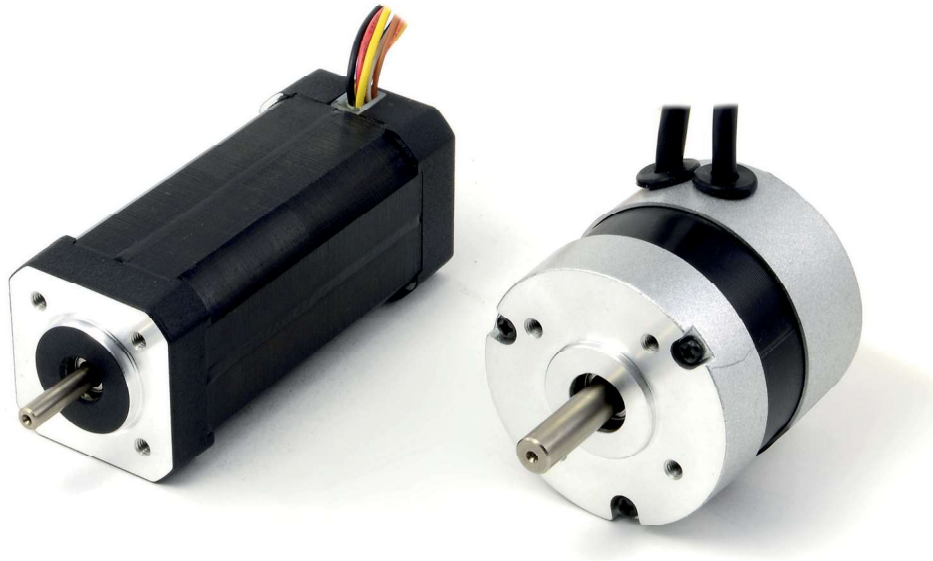

# Motors coding DC Brushless

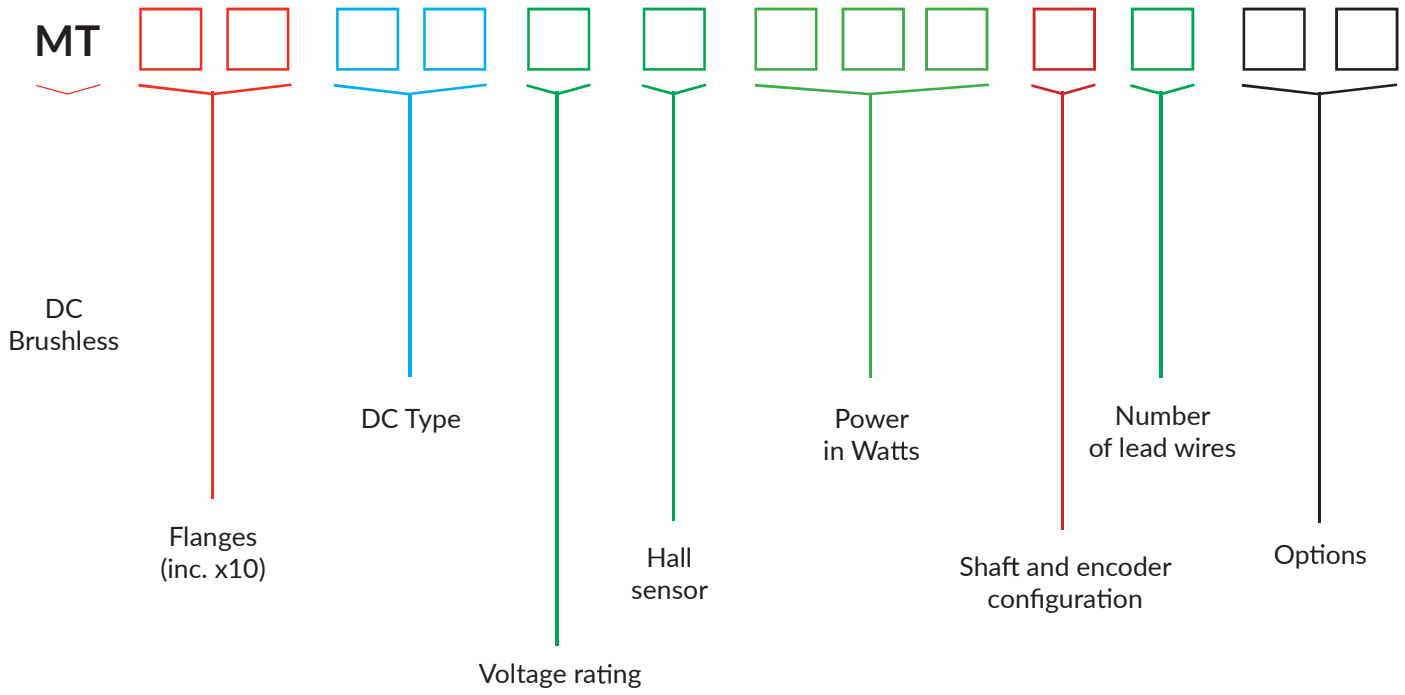



### Motor features

Phases	3
Poles	8
Rated speed	4000 rpm
No load speed	5700 rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 50°C
Max temperature rise	80K
Dielectric strength	60 / 2mA / 1s
Max shaft axial load	--
Max shaft radial load	--
Protection IP	IP 40



### Encoder features

No encoder

### Other features


Hall sensor

### Specification


Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
24.0 V	26.3 W	1.60 A	--	0.063 Nm	--	3.20 ohm	2.50 nH	--	--	TBD

### Mechanical drawing

Dimensions in mm

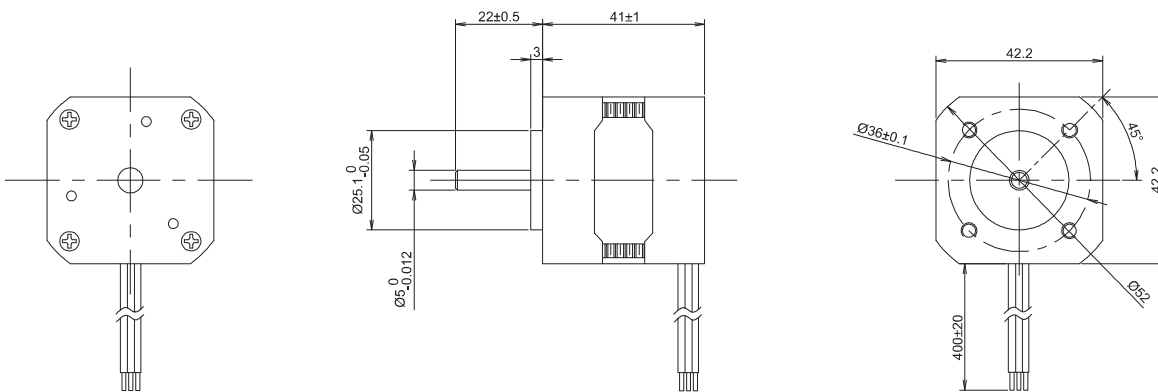

### CONNECTION DIAGRAM





### Motor features

Phases	3
Poles	10
Rated speed	3000 rpm
No load speed	--- rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	80K
Dielectric strength	--
Max shaft axial load	--
Max shaft radial load	--
Protection IP	IP 54



### Encoder features

Type	Incremental encoder
Power supply	5.00 Vdc
Resolution	1024 ppr
Output type	Line Drive

### Other features


Hall sensor

### Specification


Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
24.0 V	70.0 W	4.50 A	13.5 A	0.22Nm	0.66 Nm	--	--	1.7 Vrms/ Krpm	40 g.cm <sup>2</sup>	400 g.

### Mechanical drawing

Dimensions in mm

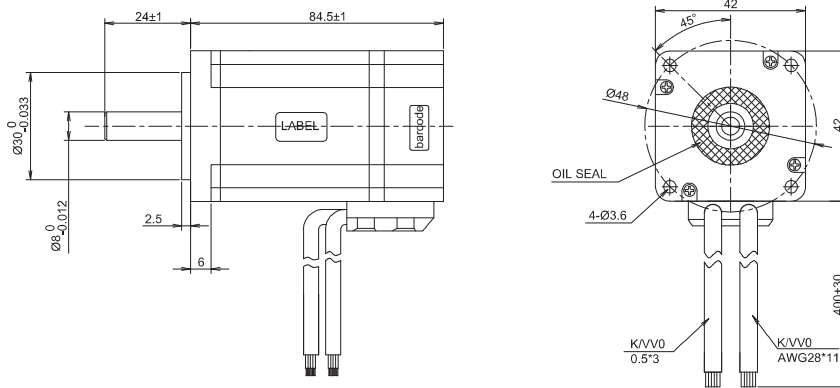

CONNECTION DIAGRAM



HALL AND ENCODER SIGNAL	
SIGNAL	COLOR
GN2	BLK
HALL C	GRN
HALL B	GRY
HALL A	BRN
Z	YEL
S	WHT
A	GRN
Z	YEL/BLK
B	WHT/BLK
A	GRN/BLK
+5V	RED



### Motor features

Phases	3
Poles	8
Rated speed	5000 rpm
No load speed	7400 rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	80K
Dielectric strength	--
Max shaft axial load	10 N
Max shaft radial load	28 N
Protection IP	IP 40



### Encoder features

Type	Incremental encoder
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line Drive

### Other features


Hall sensor

### Specification


Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
24.0 V	130.0 W	8.0 A	24.0 A	0.25 Nm	0.75 Nm	0.25 ohm	0.38 mH	2.28 Vrms/Krpm	96 g.cm <sup>2</sup>	800 g.

### Mechanical drawing

Dimensions in mm

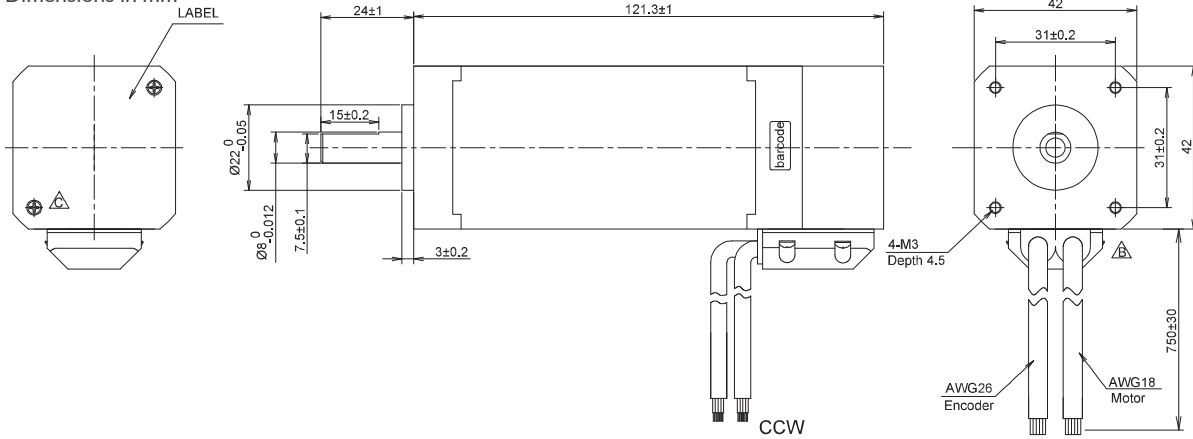

### CONNECTION DIAGRAM



HALL AND ENCODER SIGNAL	SIGNAL	COLORS
U	VEL	YEL
V	RED	RED
W	BLK	BLK
HA	BRN	BRN
HB	ORG	ORG
HC	YEL	YEL
+	RED	RED
-	RED/WHI	RED/WHI
GND	RED/WHI	RED/WHI
VCC+	RED	RED
VCC-	BLU	BLU
EA+	BLU/BLK	BLU/BLK
EA-	BLK	BLK
EB+	BLK/WHI	BLK/WHI
EB-	BRN	BRN
HB	ORG	ORG
HC	YEL	YEL





### Motor features

Phases	3
Poles	8
Rated speed	4400 rpm
No load speed	6000 rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	80K
Dielectric strength	--
Max shaft axial load	--
Max shaft radial load	--
Protection IP	IP 40



### Encoder features

No encoder

### Other features



Hall sensor

### Specification



Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
48.0 V	60.0 W	1.5 A	4.5 A	0.13 Nm	0.39 Nm	3.00 ohm	1.75 nH	4.50 Vrms/ Krpm	48 g.cm <sup>2</sup>	500 g.

### Mechanical drawing

Dimensions in mm

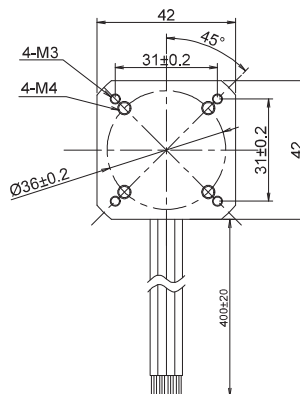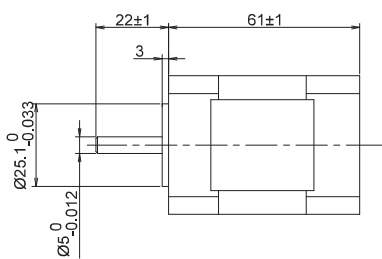

### CONNECTION DIAGRAM





### Motor features

Phases	3
Poles	4
Rated speed	6000 rpm
No load speed	8000 rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	80K
Dielectric strength	600 Vac / 2mA / 1s
Max shaft axial load	--
Max shaft radial load	--
Protection IP	IP 40



### Encoder features

No encoder

### Other features


Hall sensor

### Specification

Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
24.0 V	200.0 W	12.0 A	-- A	0.32 Nm	0.96 Nm	0.11 ohm	0.30 mH	2.50 Vrms/ Krpm	-- g.cm <sup>2</sup>	730 g.

### Mechanical drawing

Dimensions in mm

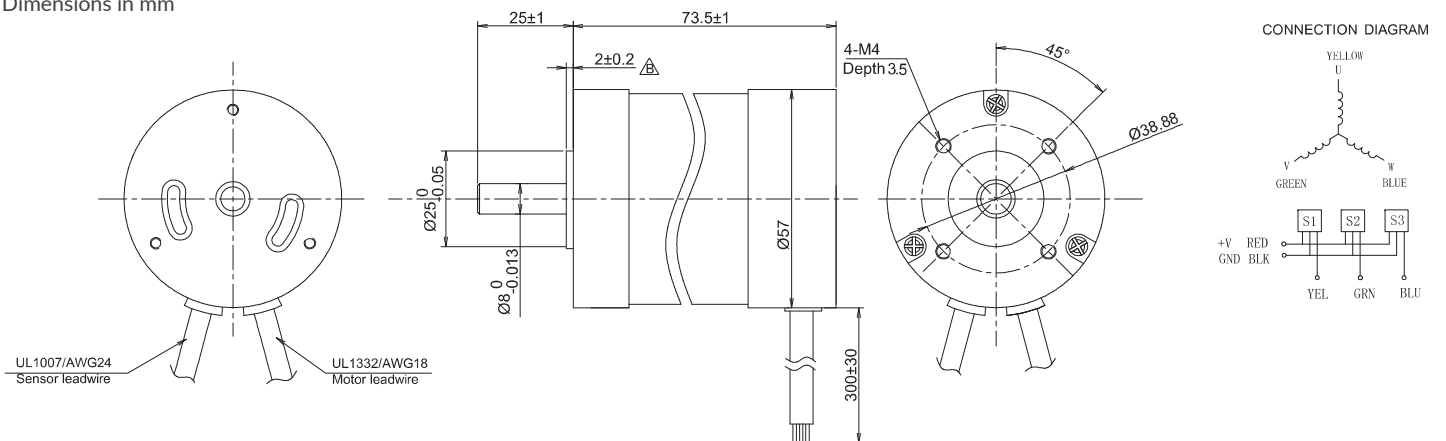



### Motor features

Phases	3
Poles	4
Rated speed	3000 rpm
No load speed	3700 rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	80K
Dielectric strength	--
Max shaft axial load	--
Max shaft radial load	--
Protection IP	IP 40




### Specification

Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
24.0 V	250.0 W	11.5 A	-- A	0.80 Nm	-- Nm	0.14 ohm	0.20 nH	4.70 Vrms/ Krpm	230 g.cm <sup>2</sup>	1200 g.

### Mechanical drawing

Dimensions in mm

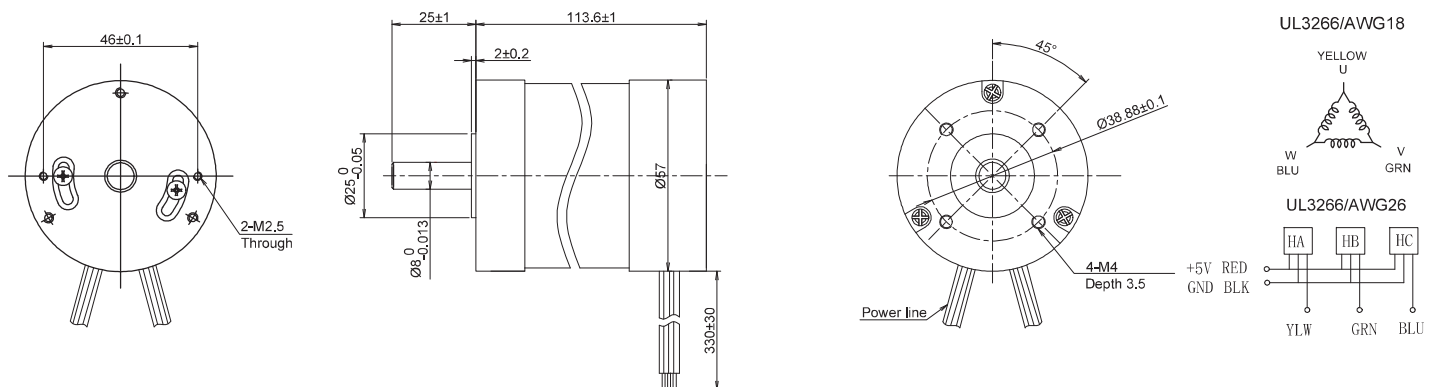



## Motor features

Phases	3
Poles	8
Rated speed	3000 rpm
No load speed	4400 rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	80K
Dielectric strength	--
Max shaft axial load	--
Max shaft radial load	--
Protection IP	IP 40



## Encoder features



Encoder type	Incremental encoder
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line Drive

## Specification

Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
36.0 V	188.0 W	7.5 A	19 A	0.60 Nm	1.50 Nm	0.53 ohm	0.58 mH	5.70 Vrms/ Krpm	460 g.cm <sup>2</sup>	2000 g.

## Mechanical drawing


Dimensions in mm

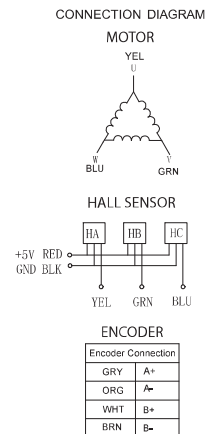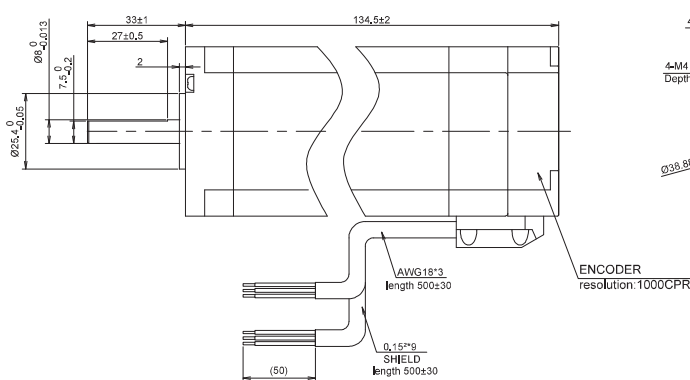



## Motor features

Phases	3
Poles	8
Rated speed	3000 rpm
No load speed	5000 rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	80K
Dielectric strength	--
Max shaft axial load	--
Max shaft radial load	--
Protection IP	IP 65

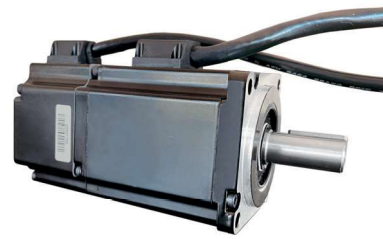

IP65 Protection

## Encoder features



Encoder type	Incremental encoder
Power supply	5.00 Vdc
Resolution	1000 ppr
Output type	Line Drive

## Specification


Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
48.0 V	200.0 W	6.1 A	18.3 A	0.64 Nm	1.92 Nm	0.80 ohm	1.60 nH	-- Vrms/ Krpm	200 g.cm <sup>2</sup>	1000 g.

## Mechanical drawing

Dimensions in mm

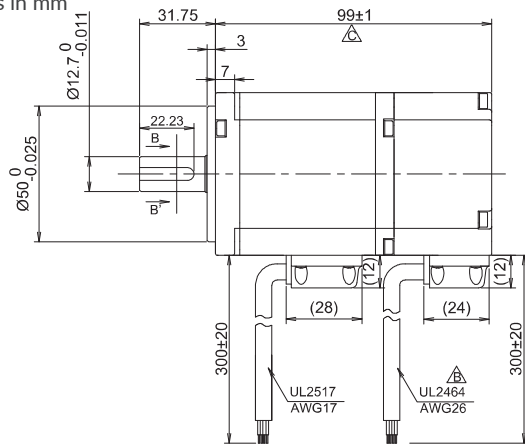

CONNECTION DIAGRAM



ENCODER CONNECTION



A	⌘	B	Z	Z	GND	Vcc (+5V)	Shield
WHT	GRY	YEL	GRN	BLU	BRN	BLK	RED



## Motor features

Phases	3
Poles	10
Rated speed	3000 rpm
No load speed	--
Insulation class	F, 155°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	105K
Dielectric strength	600 Vac / 5 mA / 1s
Max shaft axial load	60 N
Max shaft radial load	220 N
Protection IP	IP 54



## Encoder features


Encoder type	Incremental encoder
Power supply	5.00 Vdc
Resolution	2500 ppr
Output type	Line Drive

## Specification


Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
48.0 V	400.0 W	12.0 A	25.0 A	1.27 Nm	2.54 Nm	0.18 ohm	0.75 mH	7.40 Vrms/Krpm	210 g.cm <sup>2</sup>	1400 g.

## Mechanical drawing

Dimensions in mm

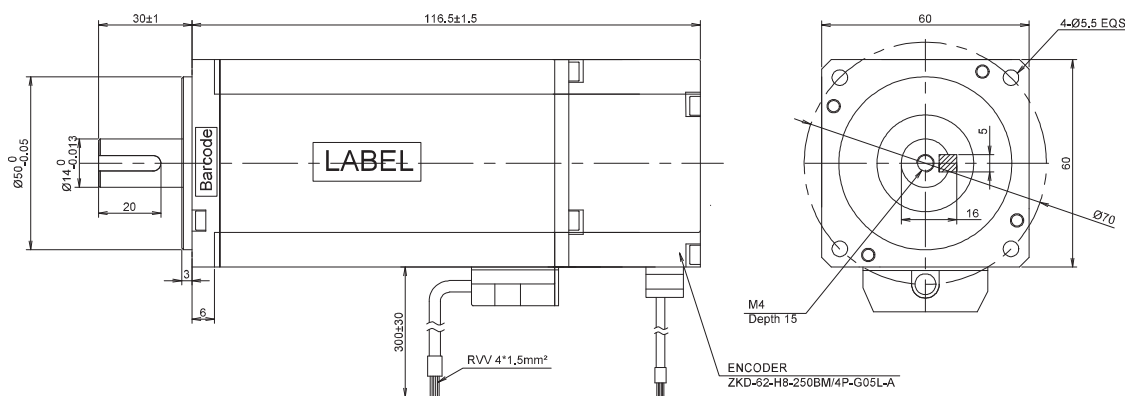

### CONNECTION DIAGRAM



### ENCODER CONNECTION

Define	Colour	Define	Colour
A	GRY	U'	BRN/WHT
B	GRN	V'	BLU/WHT
Z	YEL	W'	ORG
U	BRN	W'	ORG/WHT
V	BLU	SV	RED
A'	GRY/WHT	UV	BLK
B'	GRN/WHT	shield	---
Z'	YEL/WHT		



### Motor features

Phases	3
Poles	8
Rated speed	3000 rpm
No load speed	rpm
Insulation class	B, 130°C
Ambient temperature	-20°C ÷ + 55°C
Max temperature rise	--
Dielectric strength	500 Vac / 5 mA / 1 min.
Max shaft axial load	60 N
Max shaft radial load	220 N
Protection IP	IP 40



### Encoder features

No encoder

### Other features




Hall sensor

### Specification

Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
48.0 V	660.0 W	14.7 A	44.1 A	2.10 Nm	6.30 Nm	0.12 ohm	0.29 nH	9.7 Vrms/ Krpm	2660 g.cm <sup>2</sup>	3800 g.

### Mechanical drawing


Dimensions in mm

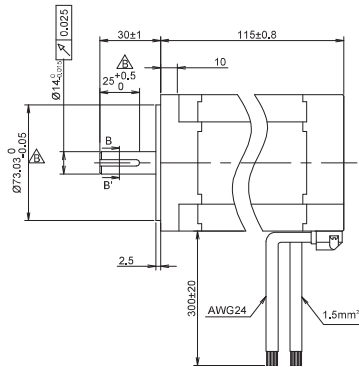

B-B'VIEW(2:1)

CONNECTION DIAGRAM

	Phase U	Phase V	Phase W	Hall +	Hall -
Motor leadwire	Yellow	Green	Blue		
Signal wire	Yellow	Green	Blue	Red	Black



Ever Elettronica has designed and produced a new series of high-efficiency, high-voltage 3-phase brushless DC motors with integrated gearbox. With a power range from 30 to 750 Watts, this motor series is ideal for high-dynamic applications in compact dimensions - for example in conveyor and roller systems, or in automated warehouses. It has a high torque-to-size ratio and offers significantly reduced power consumption.


The main features of the new high efficiency brushless DC motor series are:

- availability from 30 to 750 Watts
- integrated gearbox with different reduction ratios available
- high IP54 protection against dust and water
- high-strength bearings
- protected motor housing with plastic shell for high corrosion resistance
- low-vibration and low-resonance rotors.

Our in-house production also allows Ever Elettronica to fully customise products according to customer needs.




## HIGH VOLTAGE GEARED DC BRUSHLESS MOTORS

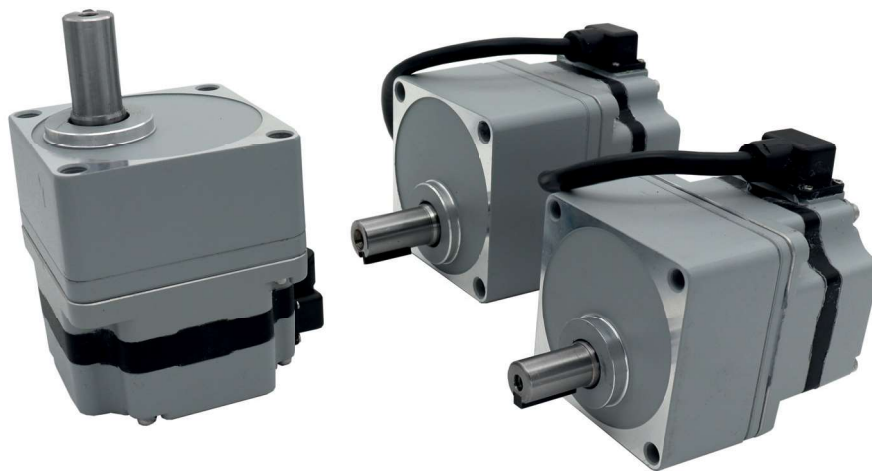



# Motors coding High Voltage Geared DC Brushless

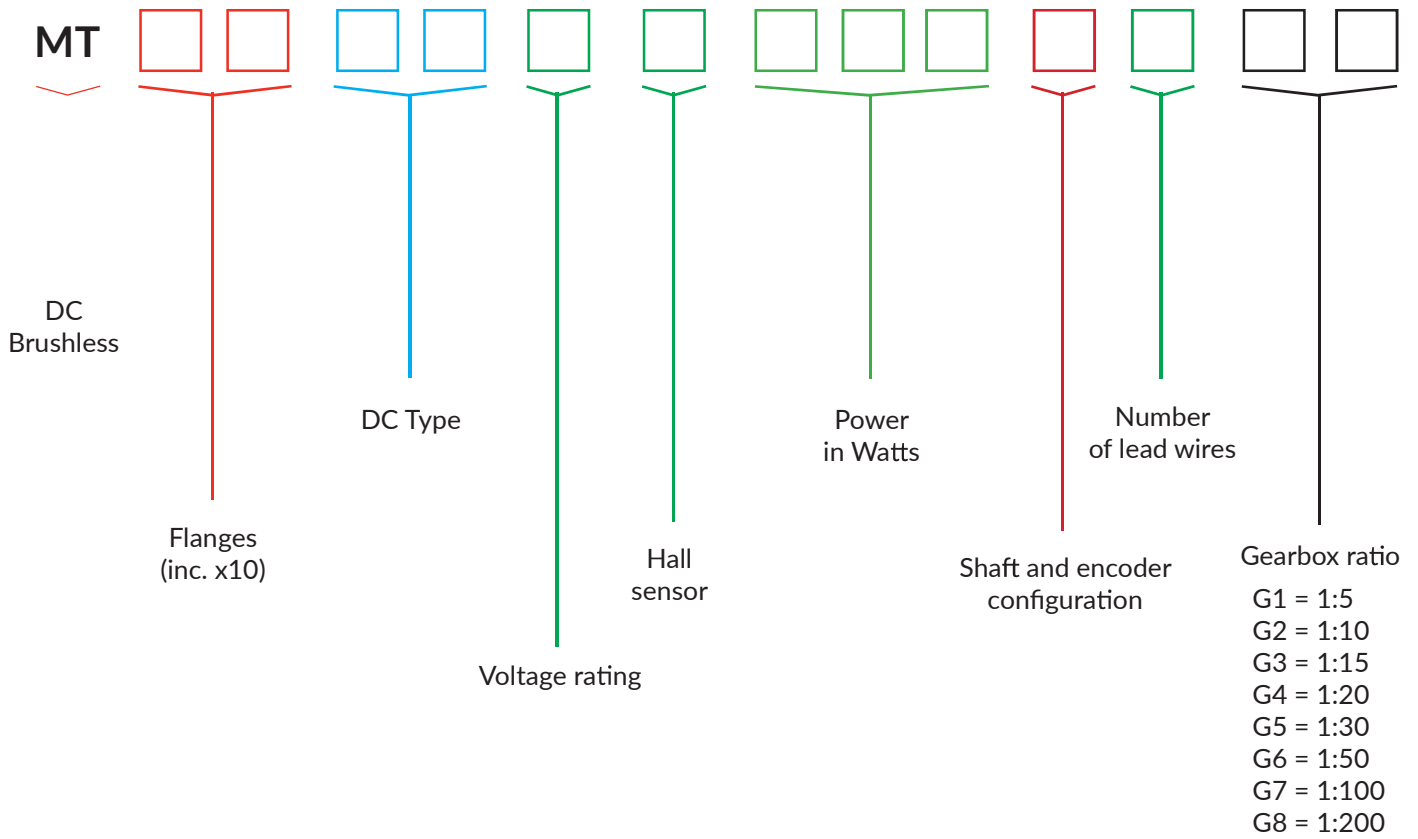





## Motor features

Phases	3
Poles	
Rated speed	3000 rpm $\pm$ 10%
No load speed	4000 rpm $\pm$ 10%
Insulation class	B, 130°C
Ambient temperature	-10°C $\div$ + 40°C
Max temperature rise	80K
Dielectric strength	1800 V/S
Max shaft axial load	100 N
Max shaft radial load	400 N 20mm from the front end of the shaft
Protection IP	IP 54



- IP54 Protection
- Hall Sensor
- Gearbox
- 230 Vac High Voltage

## Encoder features

No encoder

## Other features



Hall sensor  
Gearbox 1:5 ratio

## Specification

Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
220 Vac	120 W	1.20 A	--	0.382 Nm	-- Nm	-- ohm	-- mH	-- Vrms/ Krpm	-- g.cm <sup>2</sup>	-- g.

## Mechanical drawing

Dimensions in mm

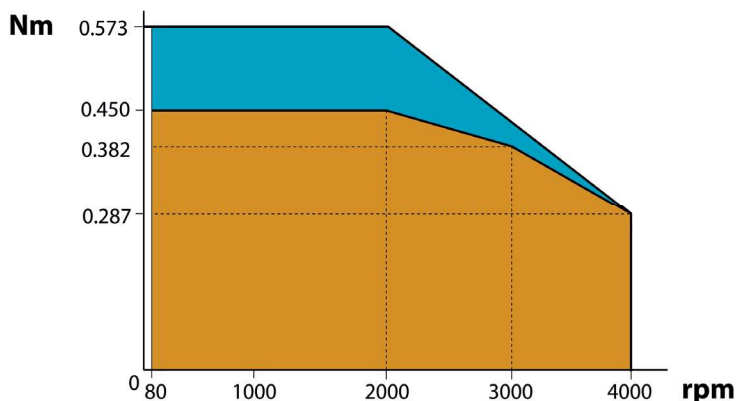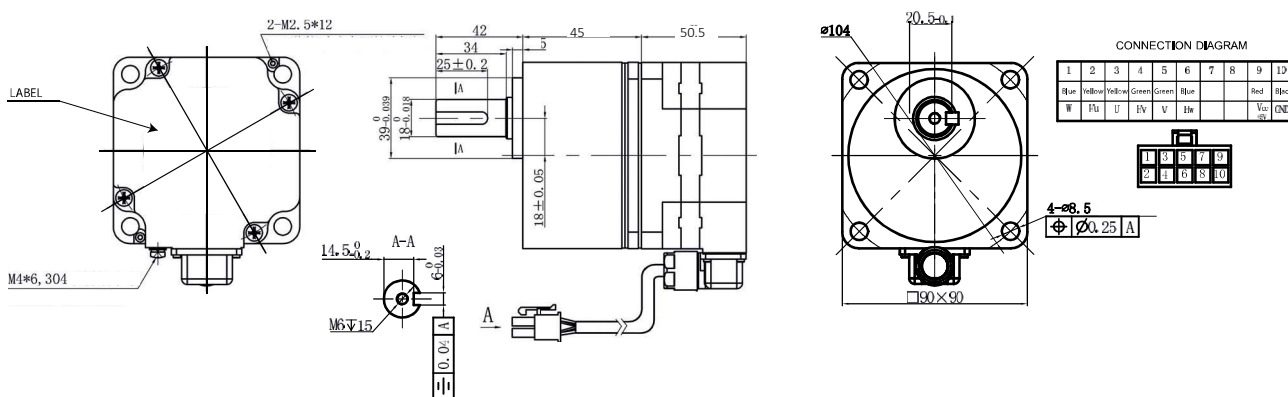

Torque diagram



### Motor features

Phases	3
Poles	
Rated speed	3000 rpm $\pm$ 10%
No load speed	4000 rpm $\pm$ 10%
Insulation class	B, 130°C
Ambient temperature	-10°C $\div$ + 40°C
Max temperature rise	80K
Dielectric strength	1800 V/S
Max shaft axial load	100 N
Max shaft radial load	400 N 20mm from the front end of the shaft
Protection IP	IP 54



### Encoder features

No encoder

### Other features



Hall sensor  
Gearbox 1:5 ratio

### Specification

Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
220 Vac	120 W	2.00 A	--	0.382 Nm	-- Nm	-- ohm	-- mH	-- Vrms/ Krpm	-- g.cm <sup>2</sup>	-- g.

### Mechanical drawing

Dimensions in mm

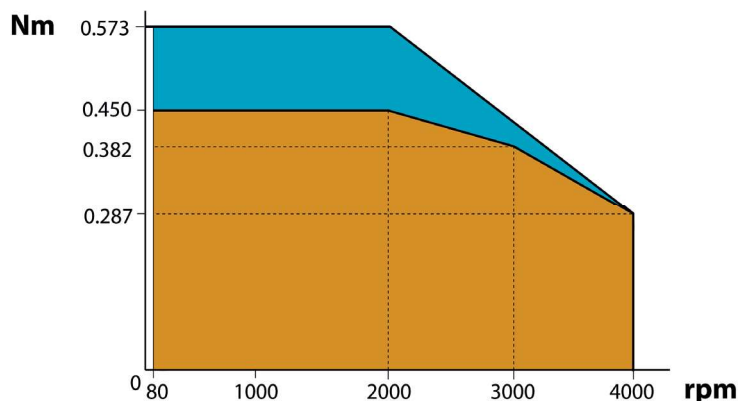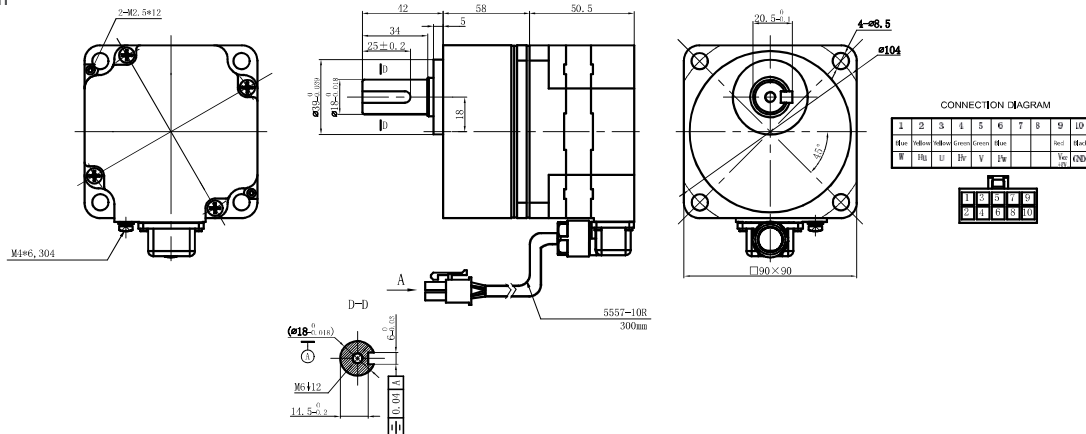


Torque diagram



### Motor features

Phases	3
Poles	
Rated speed	3000 rpm $\pm$ 10%
No load speed	4000 rpm $\pm$ 10%
Insulation class	B, 130°C
Ambient temperature	-10°C ÷ + 40°C
Max temperature rise	80K
Dielectric strength	1800 V/S
Max shaft axial load	100 N
Max shaft radial load	400 N 20mm from the front end of the shaft
Protection IP	IP 54



### Encoder features

No encoder

### Other features



Hall sensor  
Gearbox 1:5 ratio

### Specification

Rated voltage	Rated power	Rated current	Peak current	Rated torque	Peak torque	Phase resistance	Phase inductance	Back EMF	Rotor inertia	Approx weight
220 Vac	200 W	2.00 A	0.637	-- Nm	-- Nm	-- ohm	-- mH	-- Vrms/ Krpm	-- g.cm <sup>2</sup>	-- g.

### Mechanical drawing

Dimensions in mm

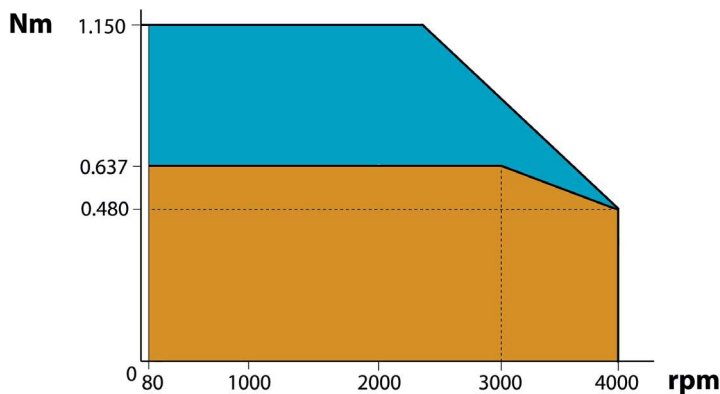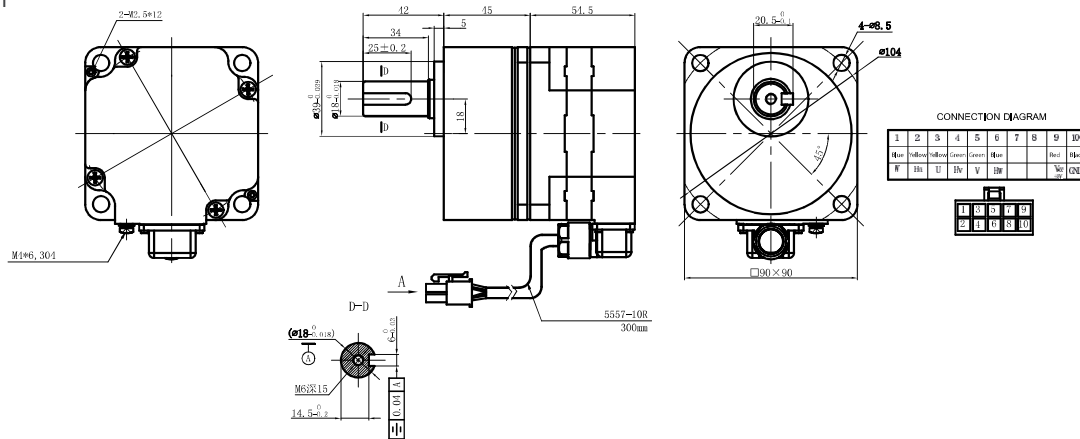

Torque diagram

# Motors Customizations

## WATERPROOF MOTORS



- “ Dimensions available from NEMA11 to NEMA34 in various depths
- “ Torques from 0.15 Nm to 12.2 Nm
- “ Cable outputs with IP65 connector or with flying lead and PG IP65 cable gland
- “ IP65 or higher protection on request

## MOTORS WITH GEARBOX




- “ Different types of gearbox available: planetary, spur gear, etc.
- “ Motors for gearbox coupling from NEMA17 to NEMA34 with various depths
- “ Motor output torques from 0.15 Nm to 12.2 Nm
- “ Customizable reduction ratios
- “ Protection class from IP20 to IP65

## MOTORS WITH INCREMENTAL OR ABSOLUTE ENCODER



- “ Different types of encoders available both incremental and absolute multi-turn
- “ Available with motors from sizes NEMA08 to NEMA42
- “ Incremental encoders with resolutions from 400 ppr to 2000 ppr and differential (5Vdc) or single ended (24Vdc) outputs
- “ Absolute multi-turn encoders with 17 Bit resolution on single turn and 16 Bit multi-turn resolution with BISS-C or SSI interface
- “ IP65 protection

## MOTORS WITH BRAKE



- “ Brakes can be applied with customized voltages and torques
- “ Motor dimensions available from NEMA24 to NEMA42 with various depths



## HOLLOW-SHAFT MOTORS

- “ Customizable with special machining on hollow shafts
- “ Motor dimensions available from NEMA17 to NEMA42 with various depths



## UL CERTIFIED MOTORS

- “ Available motor size: NEMA23




## MOTORS WITH SHAFTS FOR LINEAR ACTUATIONS

- “ NEMA17, NEMA23 and NEMA24 motor sizes available
- “ Screw parameters on the motor shaft can be customized according to the application



## MOTORS WITH MULTIPLE CHARACTERISTICS

- “ Availability of motors with multiple characteristics (e.g. High Efficiency motors with gearbox, encoder and IP65 protection)
- “ Further customization on request

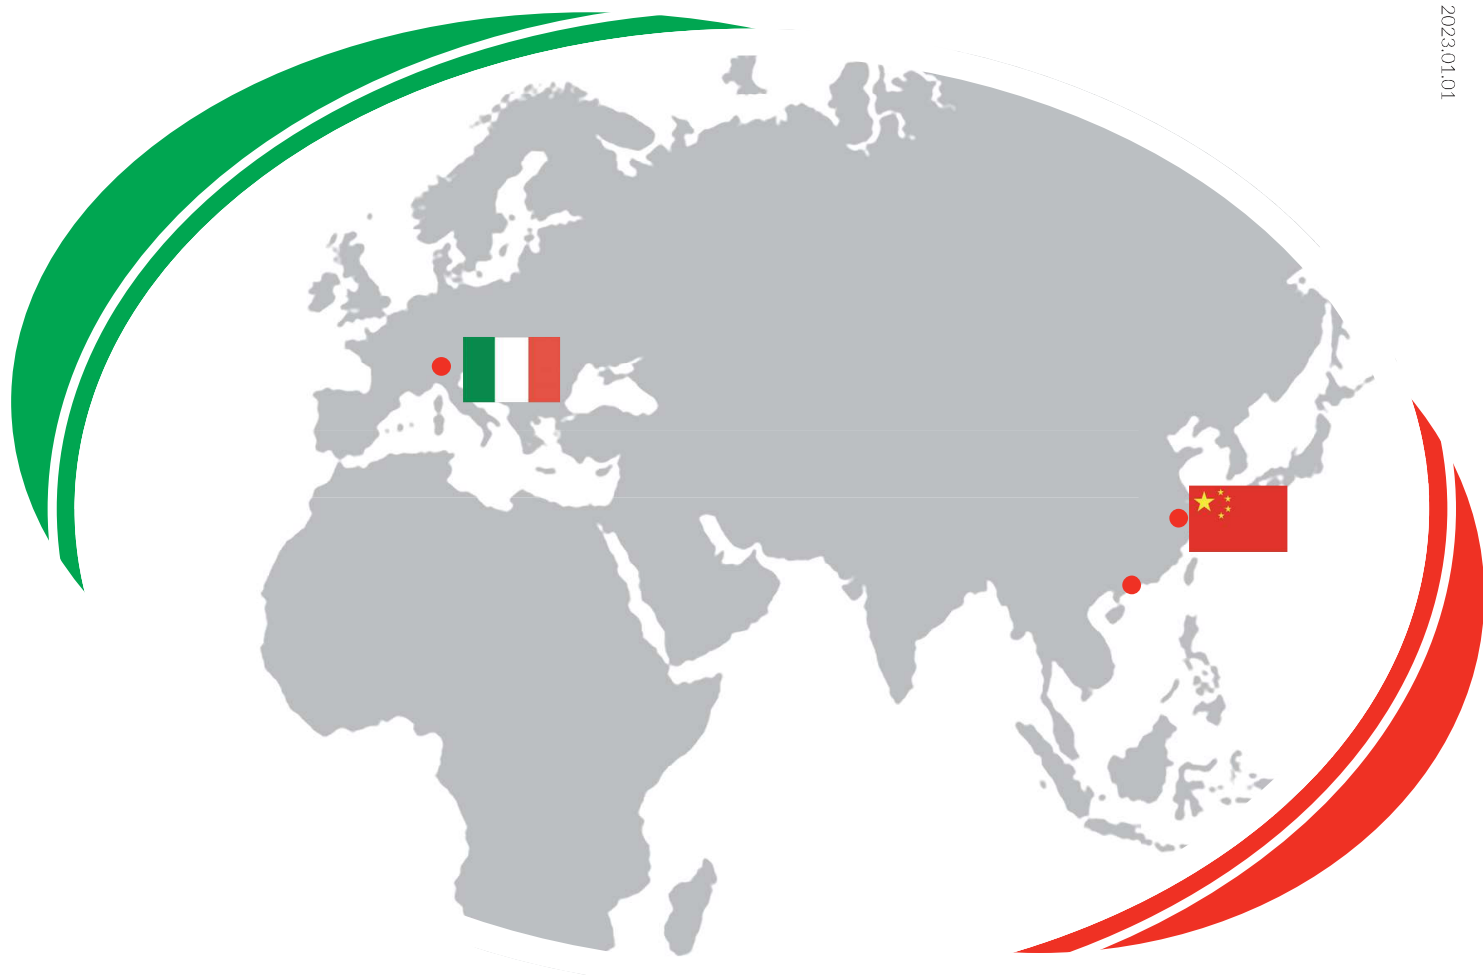

**Ever Elettronica Srl**  
**Headquarter e R&D**  
 via del Commercio 2/4  
 Lodi, ITALY



**Ever Electronics**  
**Motion Control**  
**Technology LTD**  
 Motors factory  
 Wujin Changzhou,  
 CHINA



**Production Unit**  
 via del Commercio 9/11  
 Lodi, ITALY



**Donguan**  
**Ever Electronics LTD**  
 Commercial and sales office  
 South of CHINA



T. +39 0371 412318  
 F. +39 0371 412367

infoever@everelettronica.it  
 www.everelettronica.it

