




GRAPHIC OPERATOR PANEL WITH PLC INTEGRATED and CANopen PORT

GTP 80

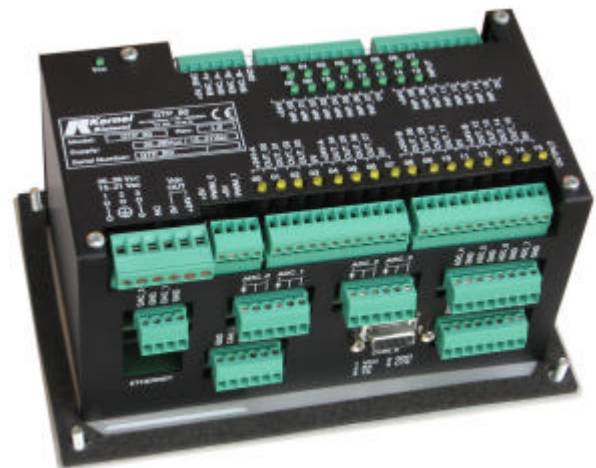

MAIN FEATURES

- Graphic LCD display, high contrast (160x80 pixel), white characters and blue background.
- Membrane Keyboard, buzzer and function keys with leds
- Until 1 Mbyte FLASH memory for PLC program, 1 Mbyte Flash memory for operator panel program, 64 kbyte EEPROM memory, 200 byte not volatile RAM memory
- N° 16 PNP digital Inputs with 4 fast inputs
- N° 16 static outputs (24VDC, 0,5 A) and n° 2 - 14 bits TTL PWM outputs
- N° 8 analogic inputs for PT100, J or K Thermocouples, current or voltage
- N° 2 +/- 10 V - 12 bit analogic outputs
- Standard and personalized communication protocols
- Can Port with CANopen master protocol
- Optional Ethernet port with Web Server function
- N° 2 serial interface (N° 1 configurable 232/485 and n° 1 configurable rs232 , 422, 485)
- USB slave interface
- Opzionale USB master interface
- N° 2 serial interface (N° 1 configurable 232/485 and n° 1 configurable rs232 , 422, 485)
- Standard e personalized communication protocols for PLC or other connections
- C language or AWL (instruction list) or graphic ladder programming (graphic ladder development)
- Extractable terminal boards
- AC or DC power supply with large range (15/22 AC, 15/26 DC)

Reseller

