



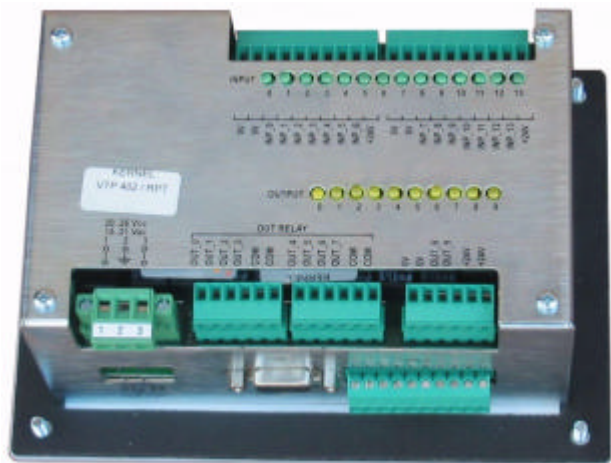

TEXT OPERATOR PANEL WITH PLC INTEGRATED

VTP 402

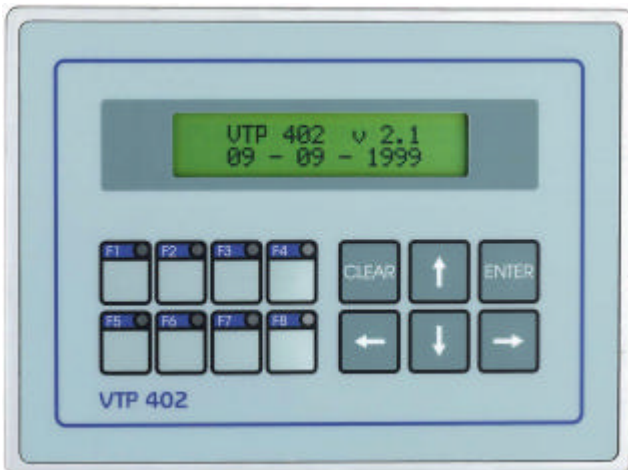

MAIN FEATURES

- 40 characters LCD high contrast display (20x2) with led backlight
- Membrane keyboard, buzzer and function keys with leds
- Until 128 Kbyte FLASH memory for PLC program, 4 Kbyte data memory, 16 EEPROM memory, 80 word on not volatile RAM memory
- N° 14 PNP digital inputs with n° 3 fast
- N° 10 0.5 A protected PNP digital outputs with n° 2 fast
- N° 2 analogic input configurable for PT100, termocoppia J o K, corrente o tensione (anche mV) con risoluzione 10 bits
- N° 2 analogic input with 10 bits resolution configurable for PT100, thermocouple J o K, current or voltage and N° 2 analogic input with 10 bits resolution configurable for J o K, current or voltage
- N° 2 serial interface (N° 1 configurable 232/485 and n° 1 configurable rs232 , 422, 485)
- Battery powered real time clock and calendar
- C language or AWL (instruction list) or graphic ladder programming (graphic ladder development)
- Extractable terminal boards
- AC or DC power supply with large range (15/22 AC, 15/26 DC)
- Step motor recipes management
- External variables management between serial interfaces and PLC, CN, inverters protocols
- PID temperature, pressure and other analogic function regulations
- Size: frontal view 124x167mm, depth 75 mm



Reseller