


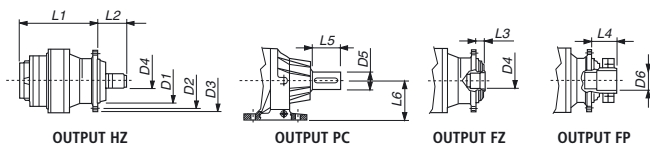



**Torque Range:** 1000 ... 500.000 N  
**Transmissible Mechanical Power:** up to 450 kW  
**Gear Ratios:**  $i=3,4 \dots 5.000$   
**Gear Unit Versions**  
 In line  
 Right angle (with a spiral bevel gear set)  
**Output Configuration**  
 Foot and flange mounted  
 Output shaft: solid with key, splined, splined hollow,  
 hollow with shrink disc  
**Input Configurations**  
 Flanged axial piston hydraulic motors  
 Hydraulic orbit motors  
 IEC and Nema motor adaptors  
 Solid input shaft  
**Hydraulic Brake**  
 Hydraulically released parking brake on request  
**Electric Brake**  
 DC and AC type

Type	Torque Nm	Max. power kW	Max. input speed RPM	Range of ratios			Design
				 Inline	 Right angle	 Combined with worm gear	
300	1000	20	3000	3,4 - 2700	7 - 700	400 - 2300	A
301	1750	30	3000	3,4 - 2700	7 - 700	400 - 2300	A
303	2500	40	3000	3,6 - 2800	9 - 800	400 - 2400	A
304	3500	50	3000	3,6 - 2500	9 - 700	400 - 2400	A
305	5000	60	3000	3,6 - 2800	9 - 800	400 - 2400	A
306	8500	75	2500	3,6 - 2900	9 - 800	400 - 2600	A
307	12500	100	2500	3,4 - 2400	13 - 700	400 - 2500	A
309	18000	130	2500	3,4 - 2400	13 - 700	400 - 2500	B
310	25000	150	2000	4 - 2500	40 - 900	400 - 5000	B
311	40000	180	2000	4 - 2100	18 - 800	400 - 5000	B
313	55000	200	2000	4 - 2200	18 - 800	400 - 5000	B
314	65000	225	2000	4 - 1800	50 - 600	400 - 5000	B
315	100000	250	1500	4 - 1800	70 - 900	400 - 5000	B
316	135000	270	1500	4,4 - 1200	50 - 600	400 - 5000	B
317	170000	300	1000	4 - 1900	70 - 900	400 - 5000	B
318	250000	340	1000	4,4 - 1100	200 - 700	400 - 5000	B
319	350000	380	500	4,8 - 1400	300 - 800	2500 - 5000	B
321	500000	450	300	4,4 - 1100	300 - 800	1000 - 5000	B

DESIGN A 300 - 307



DESIGN B 309 - 321

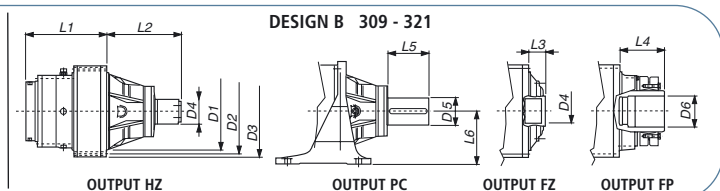

Type	Dimensions											
	D1	D2	D3	D4	D5	D6	L1 2 stadi	L2	L3	L4	L5	L6
300	110	165	185	40x36 DIN 5482	38	42	168	61	14	50	58	100
301	110	165	185	40x36 DIN 5482	50	42	180	61	14	50	82	132
303	150	195	222	58x53 DIN 5482	60	75	200	83	15	85	105	160
304	150	195	222	58x53 DIN 5482	60	75	212	83	15	85	105	160
305	150	195	222	58x53 DIN 5482	60	75	230	83	15	85	105	160
306	200	250	280	70x64 DIN 5482	80	90	260	130	40	115	130	180
307	230	295	325	80x74 DIN 5482	90	100	300	162	36	120	170	200
309	278	314	348	80x74 DIN 5482	100	120	215	231	82	245	165	225
310	340	370	400	100x94 DIN 5482	110	130	245	290	95	290	210	250
311	358	390	428	100x94 DIN 5482	120	135	250	320	88	190	210	280
313	385	415	445	120x3 DIN 5480	140	145	310	357	81	235	200	280
314	460	503	542	150x5 DIN 5480	160	180	370	429	98	260	240	315
315	460	503	542	150x5 DIN 5480	160	180	390	429	98	260	240	315
316	580	625	670	170x5 DIN 5480	180	180	430	275	145	265	260	400
317	560	635	695	200x5 DIN 5480	200	260	470	352	152	318	260	415
318	700	750	800	220x5 DIN 5480	250	220	550	340	155	305	330	500
319	800	880	940	260x5 DIN 5480	280	350	570	470	210	440	380	550
321	940	1020	1100	300x8 DIN 5480	340	390	595	500	250	440	540	650

**HEADQUARTERS**  
**BONFIGLIOLI RIDUTTORI**  
 Via Giovanni XXIII, 7/A  
 40012 Lippo di Calderara di Reno  
 Bologna (ITALY)  
 Tel. (+39) 051 6473111  
 Fax (+39) 051 6473126  
 www.bonfiglioli.com

**SALES DEPARTMENT**  
**BONFIGLIOLI RIDUTTORI S.p.A.**  
 Via Enrico Mattei, 12 - Z.I. Villa Selva  
 47100 Forlì (ITALY)  
 Tel. (+39) 0543 789111  
 Fax (+39) 0543 789242 - 0543 789245  
 trasmital@bonfiglioli.com

