


Design Data	
Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	A:Sleeve - B:Sleeve

Performance data		
Rated voltage [V]	$U_N$	12
Nominal torque [Nm]	$M_N$	2.00
No-load speed [ $\text{min}^{-1}$ ]	$n_0$	23.0
Nominal power [W]	$P_N$	4.42
Nominal current [A]	$I_N$	3.0
Nominal force [kN]	$F_N$	0.00
Duty cycle	s3	

### 0320 BR

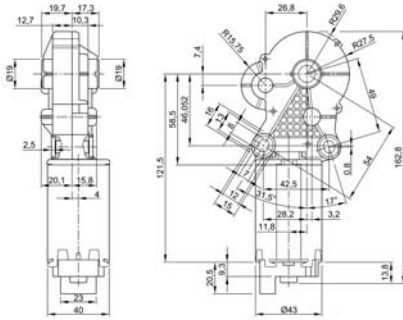


Sensor data	
Pulses	157.5
Output channels	1

Other data	
Gear ratio	157,5/1
Gear wheel material	plastic
Suppression components	5,5 $\mu$ H, 47nF
Enclosure class	IP 40
Weight [kg]	0.000

Remarks:


### Motor picture

### Characteristic curves

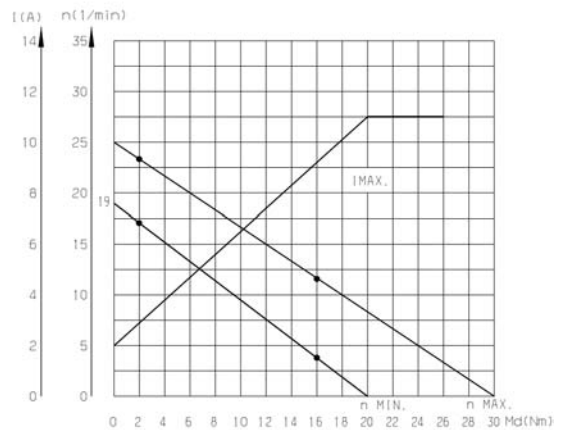


### Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)

#### W 270

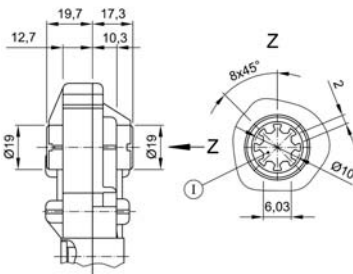


I through profile

#### S 85

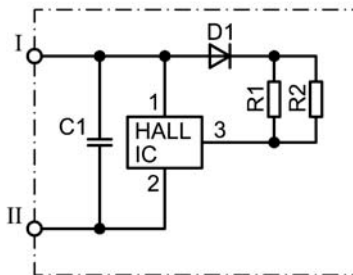

I Terminal 4, Hall-IC +  
 II Terminal 2, Hall-IC -

#### K 220

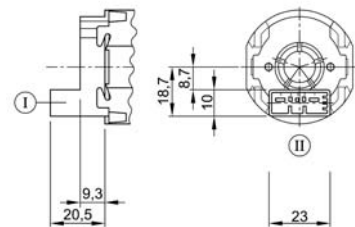

Connector TYCO C-208-15621 (Z) mating with:  
 Connector housing 1379217-3 & cover  
 1379218-2  
[www.tycoelectronics.com](http://www.tycoelectronics.com)