


# UltraFlo™



## U92T Series

- ✓ Durable, Magnetically Stabilized NBRX Sleeve Bearing Design
- ✓ Current-Limit Protection
- ✓ Optional Open-Collector Tachometer or Locked Rotor Alarm
- ✓ Plastic Housing and Impeller Rated V-0
- ✓ 12V and 24V Models

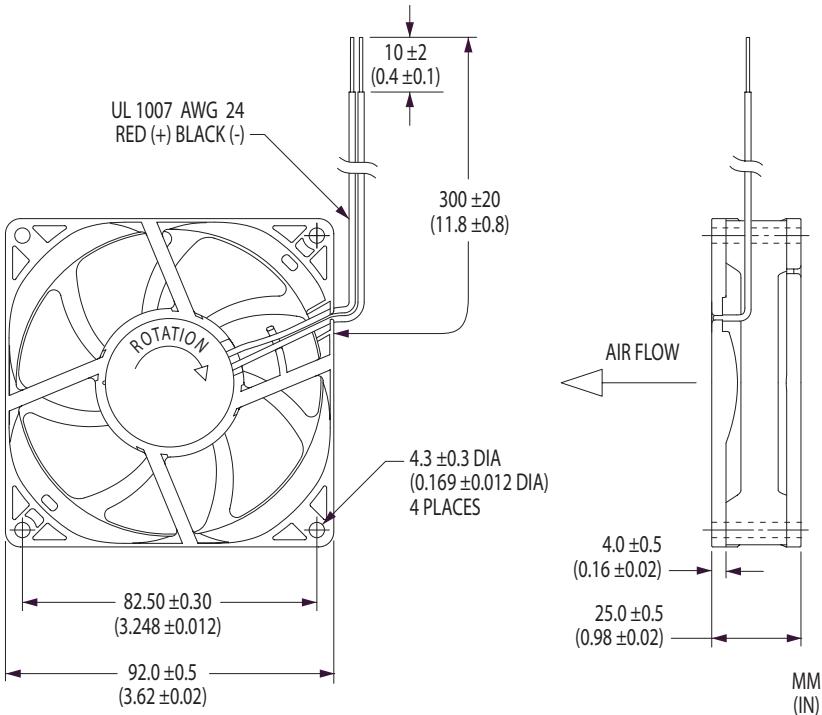

## 92x25mm Tube Axial Cooling Fans

| Model         | Air Flow<br>(CFM) | Max. Static<br>Pressure<br>(inwg) | Operating Voltage<br>Nominal<br>(V) | Operating<br>Range<br>(V) | Operating<br>Current<br>(A) | Input<br>Power<br>(W) | Fan<br>Speed<br>(rpm) | Sound<br>Pressure<br>(dBA) | Operating Temp.<br>Min. (°C) | Operating Temp.<br>Max. (°C) | L10<br>Life†<br>(hours) |
|---------------|-------------------|-----------------------------------|-------------------------------------|---------------------------|-----------------------------|-----------------------|-----------------------|----------------------------|------------------------------|------------------------------|-------------------------|
| U92T12MUA7-51 | 52                | 0.18                              | 12                                  | 7.0-13.8                  | 0.25                        | 3.0                   | 3100                  | 32.0                       | -10                          | +70                          | 45,000                  |
| U92T24MUA7-51 | 52                | 0.18                              | 24                                  | 10.0-27.6                 | 0.14                        | 3.4                   | 3100                  | 32.0                       | -10                          | +70                          | 45,000                  |
| U92T12MGA7-51 | 45                | 0.15                              | 12                                  | 7.0-13.8                  | 0.18                        | 2.2                   | 2700                  | 29.0                       | -10                          | +70                          | —                       |
| U92T24MGA7-51 | 45                | 0.15                              | 24                                  | 10.0-27.6                 | 0.10                        | 2.4                   | 2700                  | 29.0                       | -10                          | +70                          | —                       |
| U92T12MHA7-51 | 40                | 0.12                              | 12                                  | 7.0-13.8                  | 0.14                        | 1.7                   | 2400                  | 25.0                       | -10                          | +70                          | —                       |
| U92T24MHA7-51 | 40                | 0.12                              | 24                                  | 10.0-27.6                 | 0.08                        | 1.9                   | 2400                  | 25.0                       | -10                          | +70                          | —                       |
| U92T12MMA7-51 | 34                | 0.09                              | 12                                  | 7.0-13.8                  | 0.10                        | 1.2                   | 2050                  | 19.5                       | -10                          | +70                          | —                       |
| U92T24MMA7-51 | 34                | 0.09                              | 24                                  | 10.0-27.6                 | 0.05                        | 1.2                   | 2050                  | 19.5                       | -10                          | +70                          | —                       |

Air flow, current, speed and sound pressure ratings are at nominal operating voltage and zero static pressure. Current and power ratings are average expected values under those conditions. † L10 bearing life expectancy at  $T_A = +40^{\circ}\text{C}$ . <sup>TM</sup> UltraFlo is a brand trademark of Nidec Corporation. N/AJAB









### Recommended Standard Connectors

| Connector Pitch | Manufacturer       | Housing*                   | Contacts                                            |
|-----------------|--------------------|----------------------------|-----------------------------------------------------|
| 1.50mm          | J.S.T.             | ZHR-n                      | SHZ-002T-P0.5                                       |
| 2.00mm          | J.S.T.<br>Tyco/AMP | PHR-n<br>173977-n          | SPH-002T-P0.5S<br>Includes Contacts                 |
| 2.50mm          | J.S.T.<br>Tyco/AMP | EHR-n<br>XHP-n<br>171822-n | SEH-001T-P0.6<br>SXH-001T-P0.6<br>Includes Contacts |
| 2.54mm          | Molex              | 2695                       | 5159                                                |


\* The character "n" shown at the end of housing model names represents the number of contact positions available with that housing. ZHR-2, for example, identifies a housing with two contact positions.



# UltraFlo

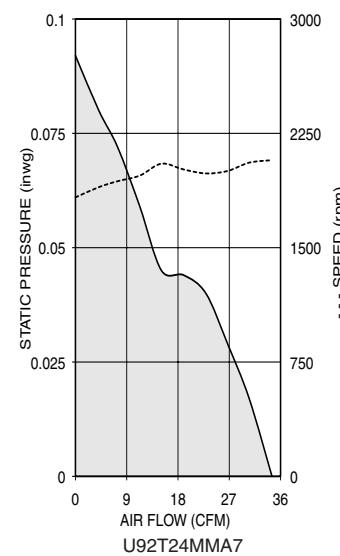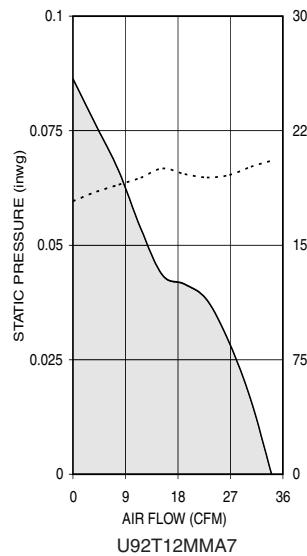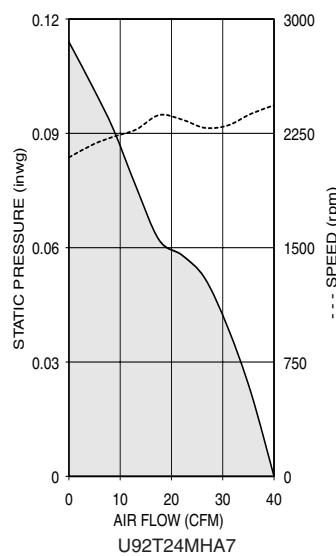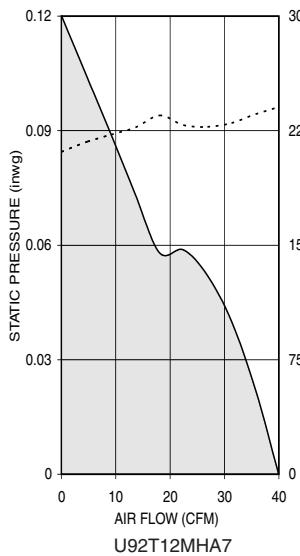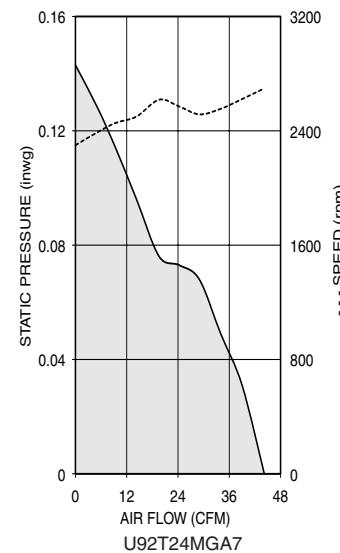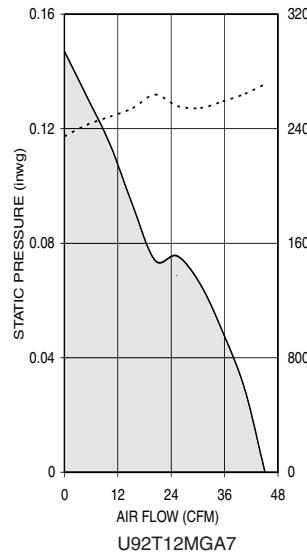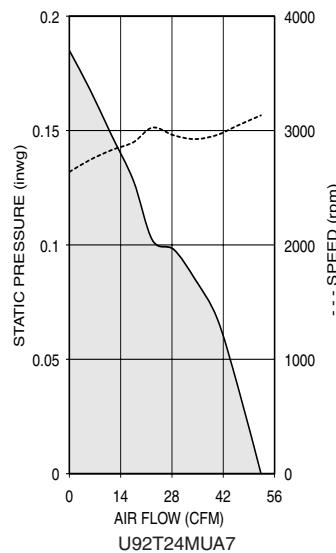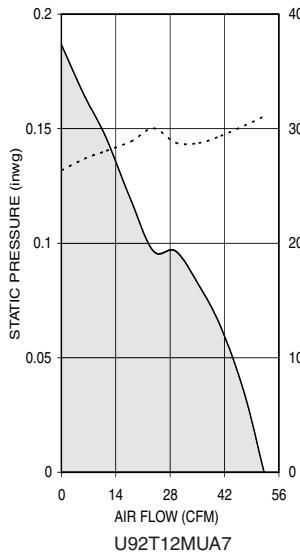


## OPEN-COLLECTOR TACHOMETER

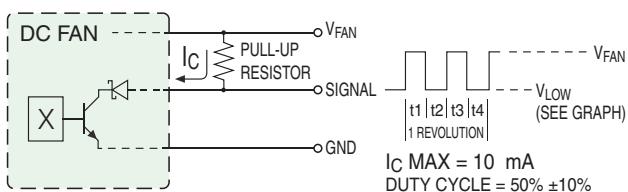


**Option '-52'**

## TYPICAL VALUES OF $V_{LOW}$ AS A FUNCTION OF $I_C$

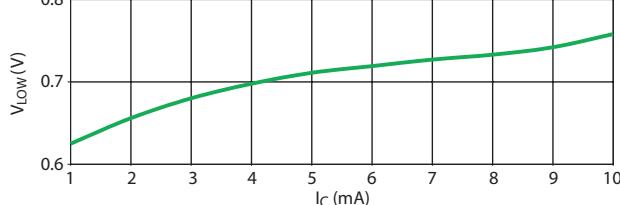

**Option '-53'**

## OPEN-COLLECTOR LOCKED ROTOR ALARM

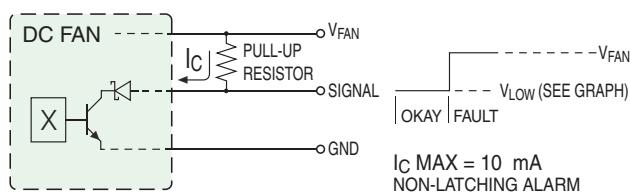

**Nidec**

All for dreams Nidec America Corporation · phone 781-769-0619 · email fans@nidec.com · www.nidec.com