


Rotary Dampers

high-torque range



ONLINE
Calculation and
2D / 3D CAD Download



Features

Material:

- Aluminium and steel

Applications:

- Mechanical and plant engineering
- Vendingmachines, Counters
- Car industry and sanitary industry

RoHS-conform:

- Directive 2002/95/EC

Temperature:

- Standard: -10°C - +60°C

Deceleration:




- Controlled damping with rotary movements
- Torques up to 700 Nm
- Both sides, Right-turning and left-turning
- Adjustable from WRD 2515
- Fixed setting up to WRD 2010

WRD-H 7550 / 9565 / 12070




R (CW)*	L (CCW)*	C*	M* (Nm)	Material*
WRD-H 7550-R	WRD-H 7550-L	WRD-H 7550-C	250	Steel
WRD-H 9565-R	WRD-H 9565-L	WRD-H 9565-C	500	
WRD-H 12070-R	WRD-H 12070-L	WRD-H 12070-C	700	

	ØA	ØB	ØC	D	E	F	G	H	I	J	ØK	L	X
WRD-H 7550	90	25	130	100	10	25	140	6,4	28	8	8,2	110,0	6
WRD-H 9565	120	30	155	125	15	32	175	9,0	33	10	8,2	137,5	6
WRD-H 12070	148	35	188	155	15	45	215	10,0	38	10	10,5	168,0	4

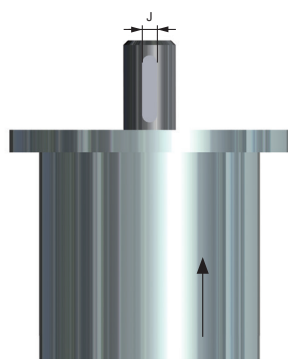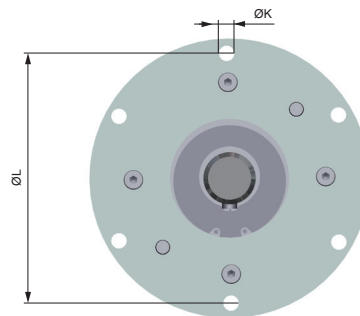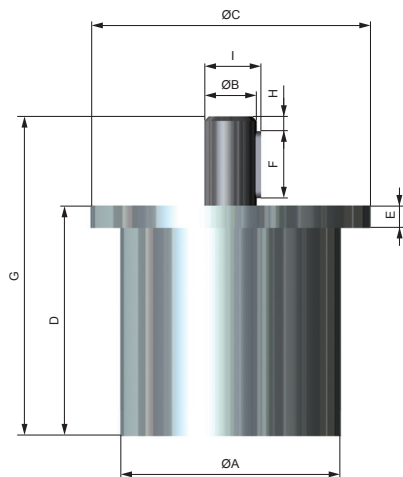

Adjustment



* R (CW): Clockwise
 L (CCW): Anti-clockwise
 C: Clockwise and anticlockwise
 M: Torque
 Material

TORQUE

Clockwise	Anti-clockwise	Clockwise and anti-clockwise	Torque	Opening angle	Weight
			Nm	°	g
WRD-H 7550-R	WRD-H 7550-L	WRD-H 7550-C	250	180	4500
WRD-H 9565-R	WRD-H 9565-L	WRD-H 9565-C	500	180	10000
WRD-H 12070-R	WRD-H 12070-L	WRD-H 12070-C	700	180	17400

Important Information

Temperature

WRD-H: -5 °C - +70 °C

Reference temperature for all technical information: 20°C

At a higher temperatures the energy absorption or torque is reduced.

Fix the rotary damper at the intended bores and flats.

It is not allowed to loaded rotary dampers in a static way or to fix them by welding.

Rotary damper can not be used with aggressive fluids.

Exception WRD-H...VA

Adjustment

If the mass in a trial run impacts excessively hard on the end position select the next model with higher torque for the series WRD-H 0607, 0805, 1208, 1610 and 2010. If the mass don't reach the end position or the time is to long select the next model with lower torque for the series mentioned above.

Rotary dampers of the series WRD-H 2515, 3015, 4025, 6030, 7550, 9565 and 12070 are adjustable. If the damping is not sufficient, increase the damping continuously by rotating the adjustment to „+“.

If the mass don't reach the end position or the time is to long, decrease the damping continuously by rotating the adjustment to „-“. If the adjustment is not sufficient in an end position contact Weforma.

Rotary dampers should under no circumstance be loaded over the damping angle mentioned in the catalogue.

Basic information

Rotary Dampers may under no circumstances be:

-painted



-welded




-held with clamps



The products must be protected against contamination, fluids and air pressure. We offer special solutions for these applications.

When rotary dampers are used parallel the size of the model and the used degree of hardness / used adjustment has to be the same. The load has to be distributed equally. When a shock absorber is used for an emergency case, an external end stop must be provided. If the absorption should be insufficient, please contact Weforma or the respective representation.

You will find further technical informations to the series in our catalogue.

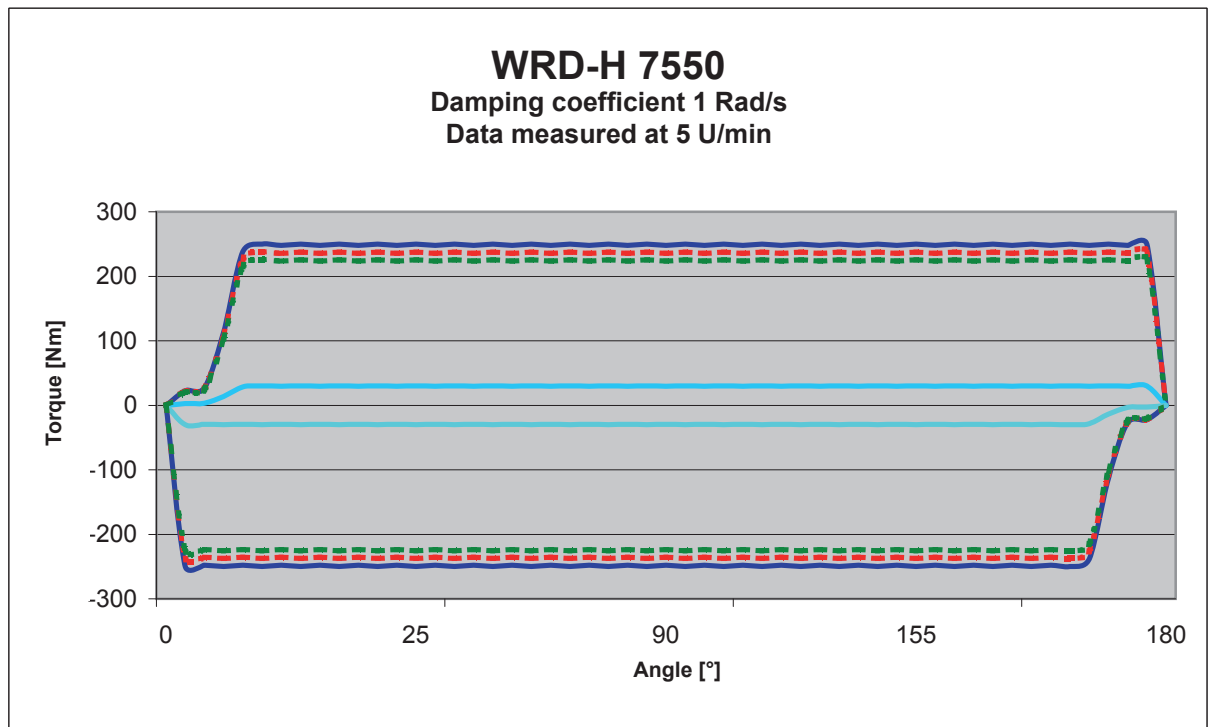

Version WRD-H 7550 C maximum damping in both directions at 20° C



Version WRD-H 7550 C maximum damping in both directions at 40° C



Version WRD-H 7550 C maximum damping in both directions at 60° C



Version WRD-H 7550 R maximum return damping at 20° C




Version WRD-H 7550 L maximum return damping at 20° C

max. angle 180°

Version „R“ and „L“ only in one direction

The values may vary depending on the adjustment and the speed

This damper is adjustable

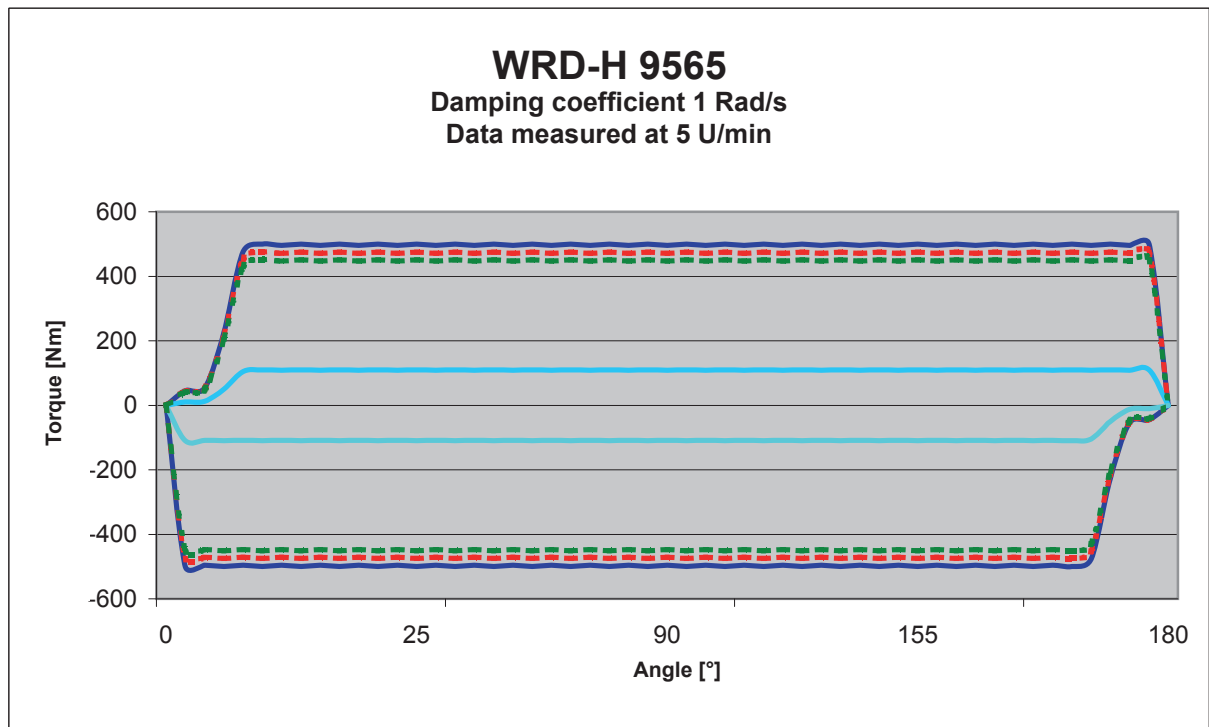

 Version WRD-H 9565 C maximum damping in both directions at 20° C

 Version WRD-H 9565 C maximum damping in both directions at 40° C

 Version WRD-H 9565 C maximum damping in both directions at 60° C

 Version WRD-H 9565 R maximum return damping at 20° C


 Version WRD-H 9565 L maximum return damping at 20° C

max. angle 180°

Version „R“ and „L“ only in one direction

The values may vary depending on the adjustment and the speed

This damper is adjustable

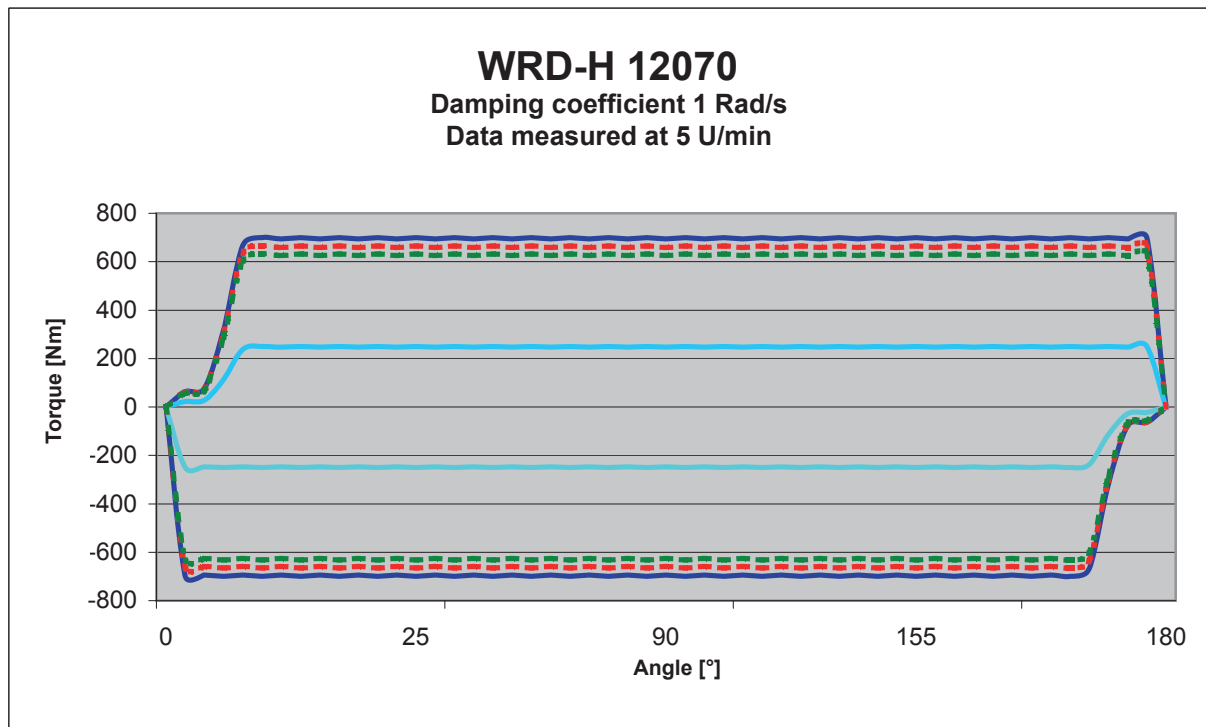

 Version WRD-H 12070 C maximum damping in both directions at 20° C

 Version WRD-H 12070 C maximum damping in both directions at 40° C

 Version WRD-H 12070 C maximum damping in both directions at 60° C

 Version WRD-H 12070 R maximum return damping at 20° C

 Version WRD-H 12070 L maximum return damping at 20° C

max. angle 180°

Version „R“ and „L“ only in one direction

The values may vary depending on the adjustment and the speed

This damper is adjustable