



WINCH DRIVES



700C Series |  | 
Winch drives



FW Series |  | 
Winch drives



800 Series |  | 
Winch drives

BENEFITS

- Compact design
- Designed for high-volume series applications

- High “performance / dimension” ratio
- Robust design
- Special design available on request

- Modular design ensures high flexibility and fast delivery using the standard components of the 300 Series

FEATURES

- Fitting for hydraulic and electric motors
- Integrated hydraulic brake available on request
- Special paint on request

- High torque range
- Fitting for hydraulic and electric motors
- Integrated hydraulic brake available on request
- Special paint on request
- Linear and angular input

- Fitting for hydraulic and electric motors
- Integrated hydraulic brake available on request
- Special paint on request
- Linear and angular input

TECHNICAL DATA

Max Torque (Nm) up to

705 C2 H	4.800
706 C3 B	9.500
707 C3 B	19.000
709 C3 B	23.000
710 C3 B	29.000
711 C3 B	32.000
713 C3 B	45.000
715 C3 B	55.000
716 C3 B	76.000
717 C3 H	95.000
718 C3 H	105.000
720 C3 H	174.000
722 C3 H	249.000

Considering FEM M5-L2-T5 @ output speed 15 rpm
Max torque values depend on ratio and linear or angular configuration, for specific selections contact Bonfiglioli

Max Torque (Nm) up to

FW30	15.000
FW40	20.000
FW55	25.000
FW80	39.000
FW100	52.000
FW130	73.000
FW180	112.000
FW220	133.000
FW260	150.000
FW360	200.000


Considering FEM M5-L2-T5 @ output speed 15 rpm
Max torque values depend on ratio and linear or angular configuration, for specific selections contact Bonfiglioli

Max Torque (Nm) up to

810 W L3	30.000
813 W L3	45.000
815 W L3	58.000
818 W L3	120.000
824 W L3	285.000

Considering FEM M5-L2-T5 @ output speed 15 rpm
Max torque values depend on ratio and linear or angular configuration, for specific selections contact Bonfiglioli



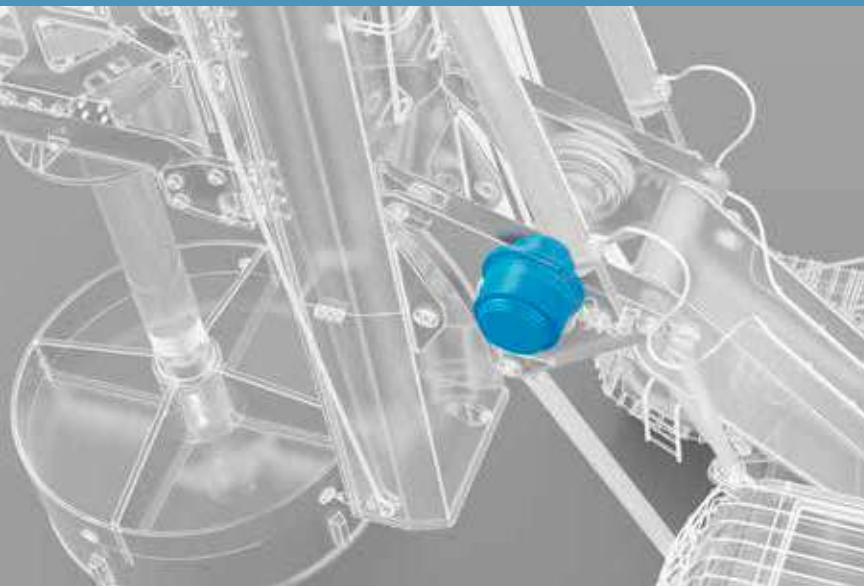

Winch drives

Bonfiglioli can supply a huge range of winch drives according to the various OEM requests for drilling rigs.



700C Series | | |
Winch drives



FW Series | | |
Winch drives



800 Series | | |
Winch drives

BENEFITS

- Compact design
- Designed for high-volume series applications

- High “performance / dimension” ratio
- Robust design
- Special design available on request

- Modular design ensures high flexibility and fast delivery using the standard components of the 300 Series

FEATURES

- Fitting for hydraulic and electric motors
- Integrated hydraulic brake available on request
- Special paint on request

- High torque range
- Fitting for hydraulic and electric motors
- Integrated hydraulic brake available on request
- Special paint on request
- Linear and angular input

- Fitting for hydraulic and electric motors
- Integrated hydraulic brake available on request
- Special paint on request
- Linear and angular input

TECHNICAL DATA

Max Torque (Nm) up to

705 C2 H	4.800
706 C3 B	9.500
707 C3 B	19.000
709 C3 B	23.000
710 C3 B	29.000
711 C3 B	32.000
713 C3 B	45.000
715 C3 B	55.000
716 C3 B	76.000
717 C3 H	95.000
718 C3 H	105.000
720 C3 H	174.000
722 C3 H	249.000

Considering FEM M5-L2-T5 @ output speed 15 rpm
Max torque values depend on ratio and linear or angular configuration, for specific selections contact Bonfiglioli

Max Torque (Nm) up to

FW30	15.000
FW40	20.000
FW55	25.000
FW80	39.000
FW100	52.000
FW130	73.000
FW180	112.000
FW220	133.000
FW260	150.000
FW360	200.000

Considering FEM M5-L2-T5 @ output speed 15 rpm
Max torque values depend on ratio and linear or angular configuration, for specific selections contact Bonfiglioli

Max Torque (Nm) up to

810 W L3	30.000
813 W L3	45.000
815 W L3	58.000
818 W L3	120.000
824 W L3	285.000

Considering FEM M5-L2-T5 @ output speed 15 rpm
Max torque values depend on ratio and linear or angular configuration, for specific selections contact Bonfiglioli