

VT20N




Alphanumeric Terminal Keyboard

Technical characteristics

- Power supply : 24 Vdc \pm 10% 3.6 W max;
- Keys : # 6 function keys and # 4 command keys;
- Display : #2-lines * 20-characters backlight LCD;
- Front panel : IP65 front membrane and gasket for panel mounting;
- Interfaces : RS232, RS422, RS485 links and serial TTL port;
- User's memory : 64 Kbytes user's flash memory and 3 Kbytes EEPROM for the menu;
- Connectors : - cable clamp for power supply connection;
- 9 pins D-sub male for TTL serial port;
- 15 pin D-sub femal for serial or CANbus links;
- Working temperature : 0 ÷ 50° C;
- Dimensions : 150.0 x 75.0 x 30.0 mm;
- Weight : 280g;

VT20N

Panel mounting dimensions:

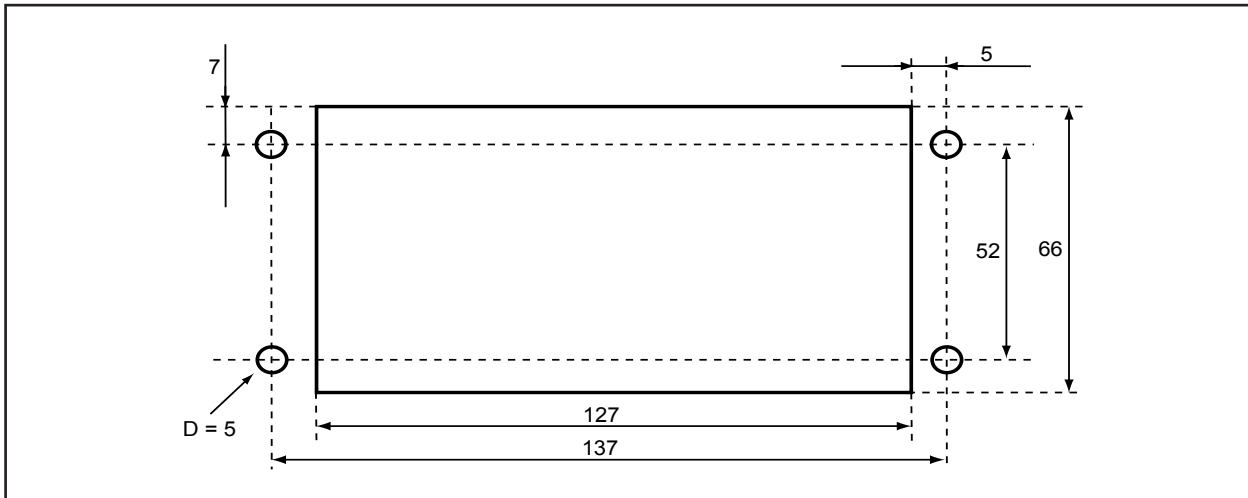

Overall characteristics and connections:



- Compact and economical.
- Best quality/price ratio.
- Easy to use.
- Compliant 89/336-EEC EMC.
- Compliant 73/23-EEC Low Voltage.



Power supply input

Serial link

Serial TTL input

Ever
ELETTRONICA

EVER SNC DI ING. CALDI & C.

Via del Commercio, 2/4

Loc. San Grato, Z.I. - 26900 LODI (ITALY)

Tel.++39 0371 412318 - Fax++39 0371 412367

e-mail : infoever@everelettronica.it

web: www.everelettronica.it